



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2015

Hardware Availability: Apr-2015

Software Availability: Apr-2015

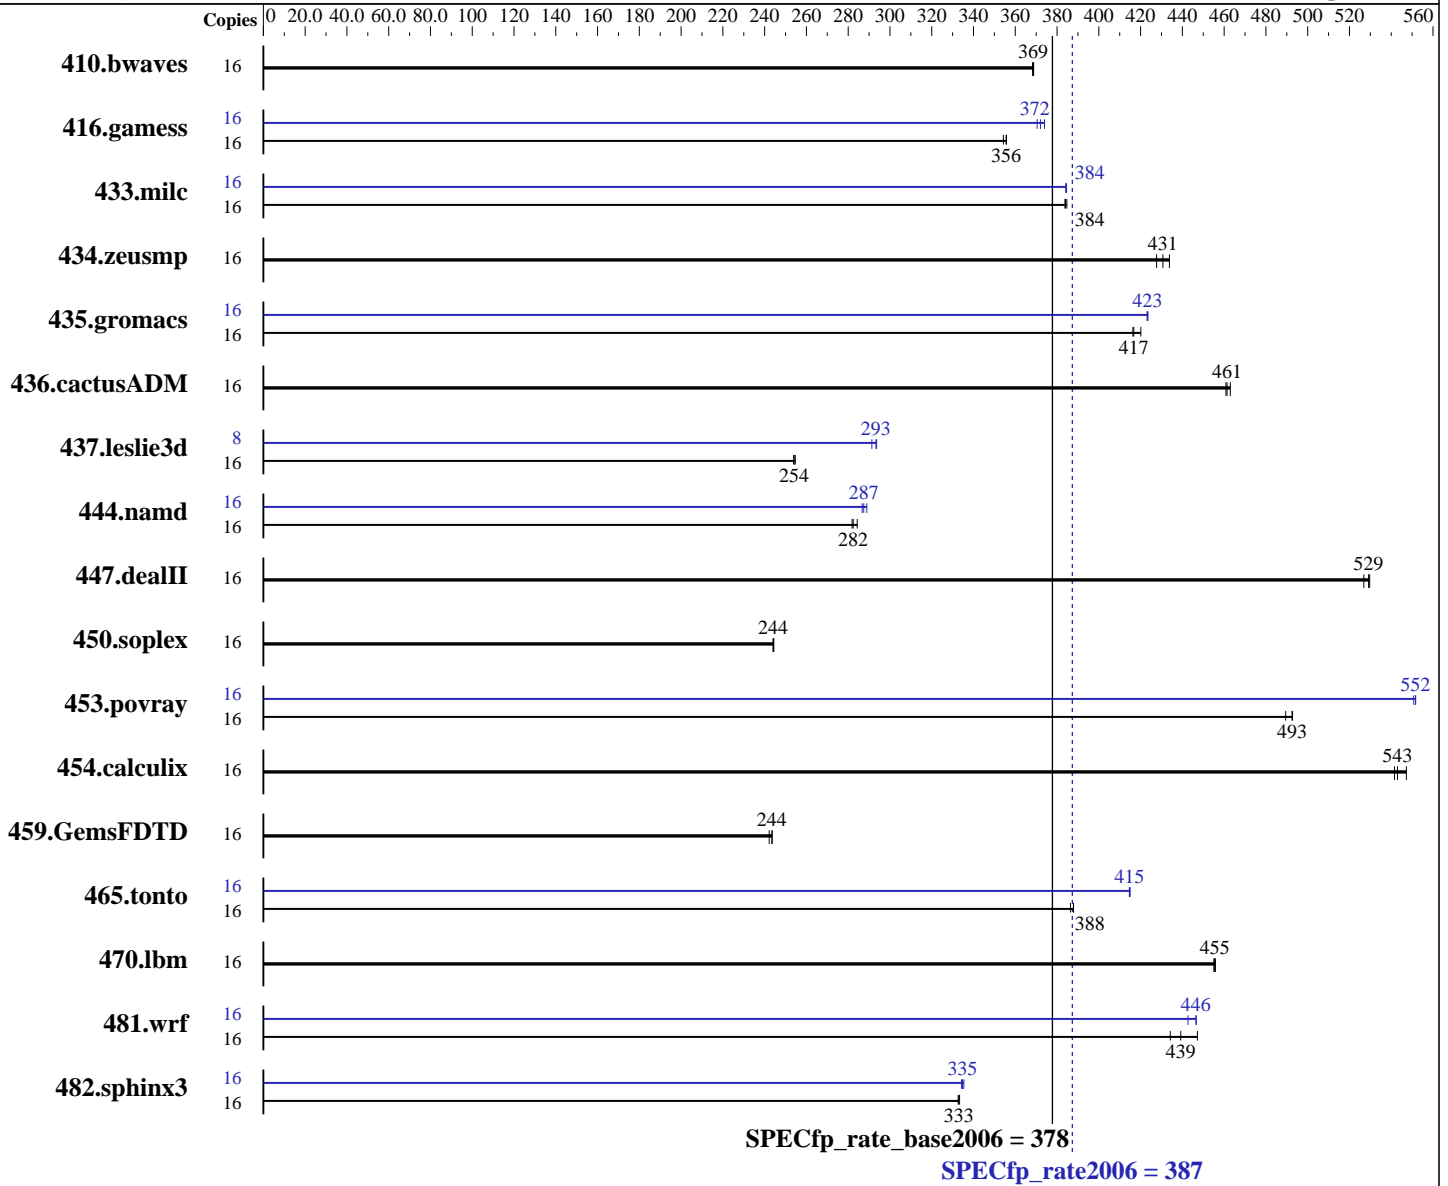

Hardware

CPU Name: Intel Xeon E5-2623 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 200 GB SSD SATA
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	590	368	590	369	590	369	16	590	368	590	369	590	369		
416.gamess	16	881	356	884	354	881	356	16	846	370	842	372	838	374		
433.milc	16	382	385	383	384	382	384	16	382	384	382	384	382	385		
434.zeusmp	16	338	431	336	434	340	428	16	338	431	336	434	340	428		
435.gromacs	16	272	420	274	417	274	416	16	270	424	270	423	270	423		
436.cactusADM	16	415	461	413	463	414	461	16	415	461	413	463	414	461		
437.leslie3d	16	592	254	591	255	592	254	8	256	293	256	294	258	291		
444.namd	16	451	284	455	282	454	282	16	446	287	444	289	448	287		
447.dealII	16	346	529	346	530	347	527	16	346	529	346	530	347	527		
450.soplex	16	546	244	547	244	547	244	16	546	244	547	244	547	244		
453.povray	16	173	493	174	489	173	493	16	154	552	155	551	154	552		
454.calculix	16	241	547	244	542	243	543	16	241	547	244	542	243	543		
459.GemsFDTD	16	697	244	701	242	697	244	16	697	244	701	242	697	244		
465.tonto	16	407	386	406	388	406	388	16	380	415	379	415	380	415		
470.lbm	16	482	456	483	455	483	455	16	482	456	483	455	483	455		
481.wrf	16	400	447	407	439	412	434	16	404	443	400	447	400	446		
482.sphinx3	16	937	333	935	333	937	333	16	933	334	930	335	932	335		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Early Snoop
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Platform Notes (Continued)

System Profile set to Custom
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-ny5m Fri Jan 23 20:45:27 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2623 v3 @ 3.00GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal: 132186916 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-ny5m 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 23 11:19
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Platform Notes (Continued)

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	176G	8.6G	166G	5%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Memory:

4x 002C00B3002C 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1867 MHz

4x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1867 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 387

PowerEdge FC430 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 8 11:03:45 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 April 2015.