



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 590

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = 574

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

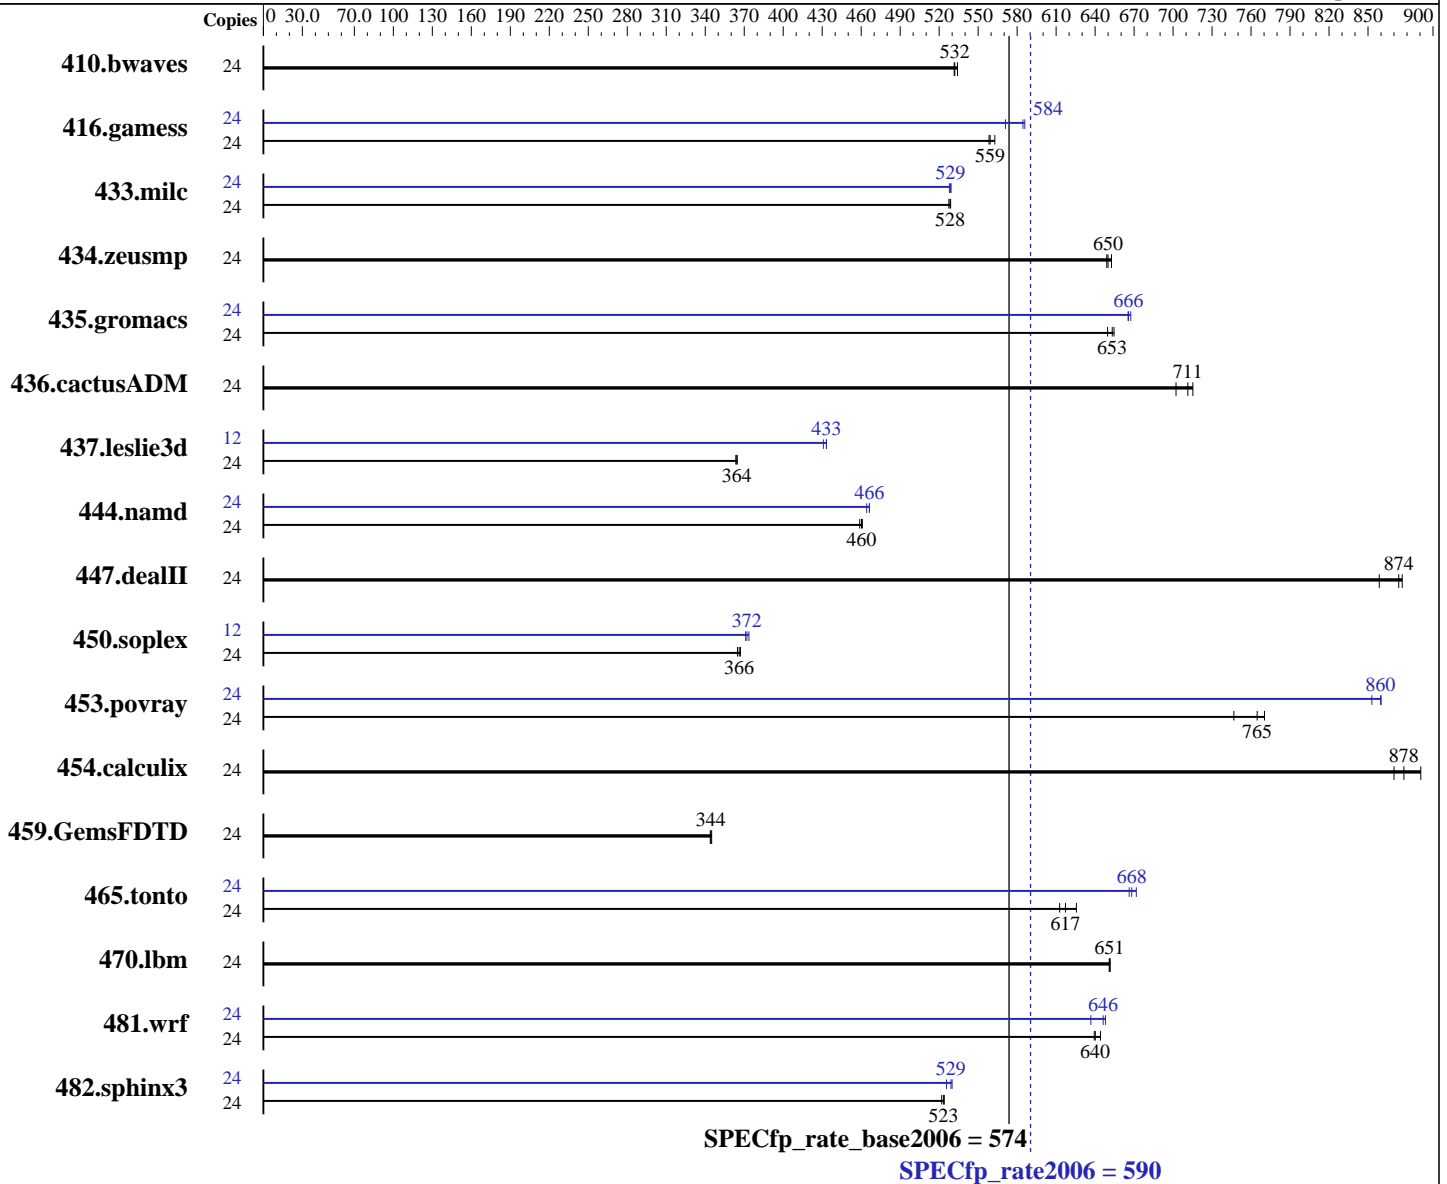

### Hardware

CPU Name: Intel Xeon E5-2643 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = **590**

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = **574**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	614	532	<b>613</b>	<b>532</b>	611	534	24	614	532	<b>613</b>	<b>532</b>	611	534
416.gamess	24	<b>840</b>	<b>559</b>	842	558	835	563	24	823	571	802	586	<b>804</b>	<b>584</b>
433.milc	24	418	527	417	529	<b>417</b>	<b>528</b>	24	416	529	<b>417</b>	<b>529</b>	417	528
434.zeusmp	24	<b>336</b>	<b>650</b>	337	649	335	653	24	<b>336</b>	<b>650</b>	337	649	335	653
435.gromacs	24	<b>262</b>	<b>653</b>	262	655	264	650	24	<b>257</b>	<b>666</b>	257	667	258	665
436.cactusADM	24	401	715	<b>403</b>	<b>711</b>	408	702	24	401	715	<b>403</b>	<b>711</b>	408	702
437.leslie3d	24	621	364	<b>619</b>	<b>364</b>	619	365	12	260	433	262	431	<b>260</b>	<b>433</b>
444.namd	24	<b>418</b>	<b>460</b>	418	461	419	459	24	<b>413</b>	<b>466</b>	413	466	415	464
447.dealII	24	320	859	313	876	<b>314</b>	<b>874</b>	24	320	859	313	876	<b>314</b>	<b>874</b>
450.soplex	24	545	367	549	365	<b>547</b>	<b>366</b>	12	<b>269</b>	<b>372</b>	268	374	270	371
453.povray	24	171	747	166	770	<b>167</b>	<b>765</b>	24	150	853	<b>149</b>	<b>860</b>	148	860
454.calculix	24	<b>226</b>	<b>878</b>	222	891	228	870	24	<b>226</b>	<b>878</b>	222	891	228	870
459.GemsFDTD	24	740	344	738	345	<b>740</b>	<b>344</b>	24	740	344	738	345	<b>740</b>	<b>344</b>
465.tonto	24	377	626	385	613	<b>383</b>	<b>617</b>	24	352	672	<b>353</b>	<b>668</b>	354	666
470.lbm	24	507	651	506	652	<b>506</b>	<b>651</b>	24	507	651	506	652	<b>506</b>	<b>651</b>
481.wrf	24	419	639	416	644	<b>419</b>	<b>640</b>	24	<b>415</b>	<b>646</b>	421	637	414	648
482.sphinx3	24	896	522	893	524	<b>894</b>	<b>523</b>	24	<b>884</b>	<b>529</b>	890	526	883	530

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Snoop Mode to ES mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

**SPECfp\_rate2006 = 590**

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

**SPECfp\_rate\_base2006 = 574**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

### Platform Notes (Continued)

```
Set Patrol Scrub to Disable
Sysinfo program /spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 # $ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Jul 3 06:13:08 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263578448 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 1 06:23

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4 385G  55G 311G 15% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 590

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = 574

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.36 04/09/2015

Memory:

8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz

8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 590

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = 574

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jul-2015  
Hardware Availability: Sep-2014  
Software Availability: Sep-2014

## Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 590

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = 574

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
          -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 590

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = 574

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 590

Huawei RH1288 V3 (Intel Xeon E5-2643 v3)

SPECfp\_rate\_base2006 = 574

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jul 29 12:09:57 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 July 2015.