



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp[®]_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

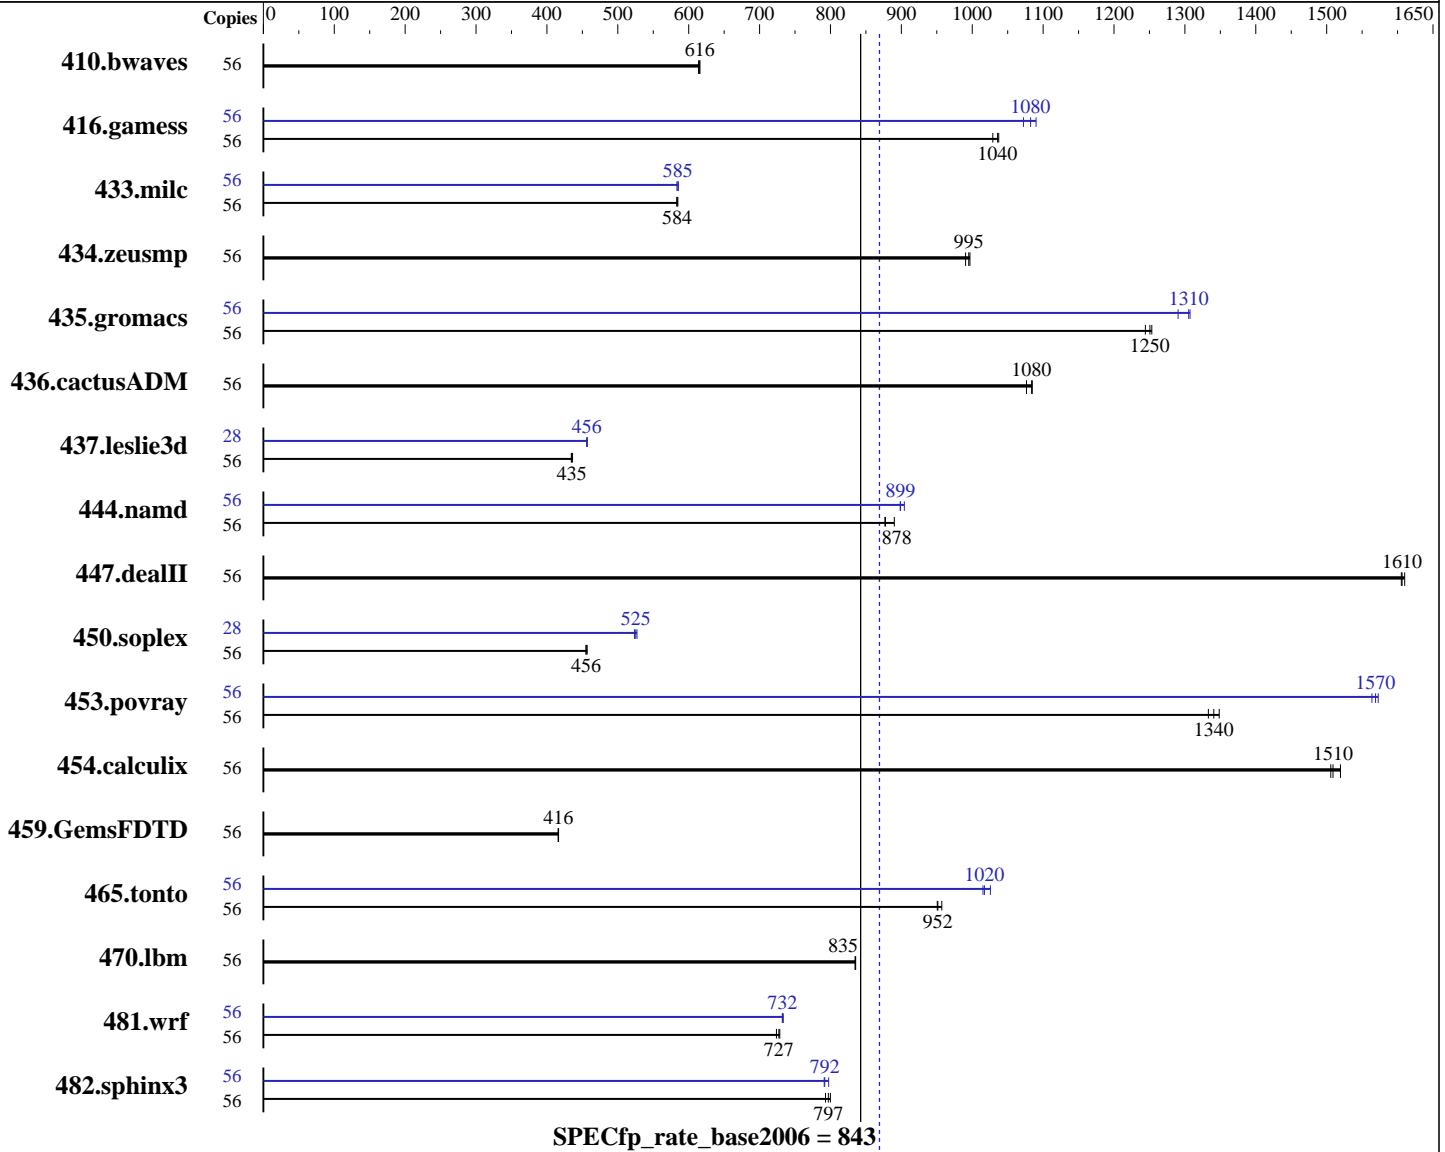

Hardware

CPU Name: Intel Xeon E5-2697 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.11.1.el7.x86_64
 Compiler: C/C++: Version 16.0.0.047 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.047 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 240 GB SATA II SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1236	616	<u>1236</u>	<u>616</u>	1240	614	56	1236	616	<u>1236</u>	<u>616</u>	1240	614
416.gamess	56	<u>1059</u>	<u>1040</u>	1057	1040	1066	1030	56	1006	1090	<u>1013</u>	<u>1080</u>	1023	1070
433.milc	56	<u>880</u>	<u>584</u>	879	585	882	583	56	881	583	<u>879</u>	<u>585</u>	878	585
434.zeusmp	56	<u>512</u>	<u>995</u>	511	997	514	991	56	<u>512</u>	<u>995</u>	511	997	514	991
435.gromacs	56	<u>320</u>	<u>1250</u>	319	1250	321	1240	56	310	1290	306	1310	<u>306</u>	<u>1310</u>
436.cactusADM	56	622	1080	617	1080	<u>617</u>	<u>1080</u>	56	622	1080	617	1080	<u>617</u>	<u>1080</u>
437.leslie3d	56	<u>1210</u>	<u>435</u>	1207	436	1212	434	28	576	457	577	456	<u>577</u>	<u>456</u>
444.namd	56	512	877	505	890	<u>512</u>	<u>878</u>	56	500	898	497	904	<u>500</u>	<u>899</u>
447.dealII	56	398	1610	399	1610	<u>399</u>	<u>1610</u>	56	398	1610	399	1610	<u>399</u>	<u>1610</u>
450.soplex	56	1022	457	<u>1025</u>	<u>456</u>	1026	455	28	443	527	446	523	<u>445</u>	<u>525</u>
453.povray	56	<u>222</u>	<u>1340</u>	221	1350	223	1330	56	<u>190</u>	<u>1570</u>	189	1570	191	1560
454.calculix	56	304	1520	<u>306</u>	<u>1510</u>	307	1510	56	304	1520	<u>306</u>	<u>1510</u>	307	1510
459.GemsFDTD	56	<u>1427</u>	<u>416</u>	1429	416	1427	416	56	<u>1427</u>	<u>416</u>	1429	416	1427	416
465.tonto	56	<u>579</u>	<u>952</u>	576	957	580	951	56	543	1020	<u>542</u>	<u>1020</u>	537	1030
470.lbm	56	<u>921</u>	<u>835</u>	922	835	921	836	56	<u>921</u>	<u>835</u>	922	835	921	836
481.wrf	56	859	729	<u>860</u>	<u>727</u>	864	724	56	<u>854</u>	<u>732</u>	853	733	855	732
482.sphinx3	56	1364	800	<u>1369</u>	<u>797</u>	1376	793	56	1380	791	1369	797	<u>1378</u>	<u>792</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:
Intel(R) Hyper-Threading Tech = Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

Platform Notes (Continued)

Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = 2133
Cluster-on-Die = Enabled
Set Fan Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191
running on SUT Fri Nov 6 23:05:39 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
    2 "physical id"s (chips)
    56 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 14
    siblings  : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      263872952 kB
HugePages_Total:      1
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
os-release.rpmnew:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux SUT 3.10.0-229.11.1.el7.x86_64 #5 SMP Mon Sep 14 17:11:19 CEST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 6 12:12
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  212G   37G  165G  19% /
```

Additional information from dmidecode:

BIOS Intel Corporation SE5C610.86B.01.01.0009.060120151350 06/01/2015

Memory:

16x 16 GB

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2134 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"
```

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2697 v3, 2.60 GHz)

SPECfp_rate2006 = 869

SPECfp_rate_base2006 = 843

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 1 17:41:55 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.