



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp®2006 = 71.7

SPECfp_base2006 = 70.7

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

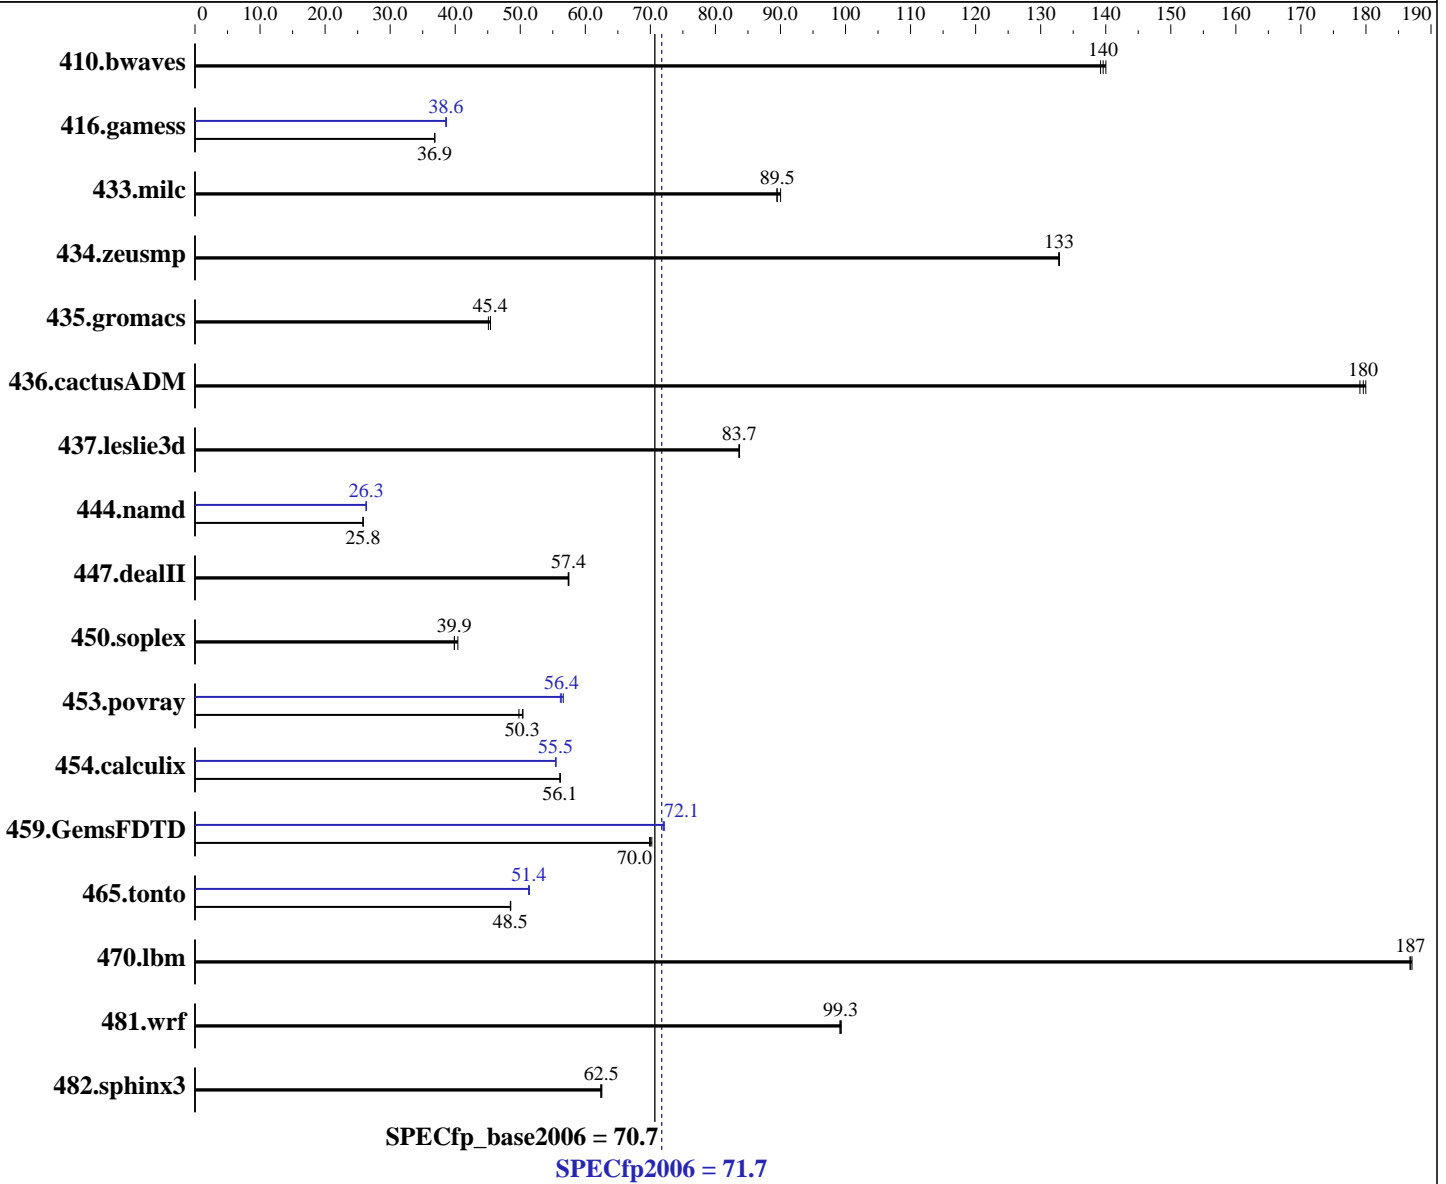

Hardware

CPU Name: Intel Core i3-6100TE
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp2006 = **71.7**

SPECfp_base2006 = **70.7**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 1Rx8 PC4-2800R-U, running at 2133 MHz)
Disk Subsystem: 1 x 200 GB SATA III SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	97.1	140	97.3	140	97.6	139	97.1	140	97.3	140	97.6	139
416.gamess	531	36.9	531	36.8	531	36.9	507	38.6	507	38.6	507	38.6
433.milc	102	90.0	103	89.5	103	89.5	102	90.0	103	89.5	103	89.5
434.zeusmp	68.5	133	68.5	133	68.5	133	68.5	133	68.5	133	68.5	133
435.gromacs	157	45.4	158	45.1	157	45.4	157	45.4	158	45.1	157	45.4
436.cactusADM	66.7	179	66.4	180	66.5	180	66.7	179	66.4	180	66.5	180
437.leslie3d	112	83.7	112	83.7	112	83.6	112	83.7	112	83.7	112	83.6
444.namd	310	25.8	310	25.9	310	25.8	305	26.3	305	26.3	305	26.3
447.dealII	199	57.5	199	57.4	199	57.4	199	57.5	199	57.4	199	57.4
450.soplex	209	39.9	209	39.9	206	40.4	209	39.9	209	39.9	206	40.4
453.povray	107	49.8	106	50.4	106	50.3	94.7	56.2	94.4	56.4	94.0	56.6
454.calculix	147	56.1	147	56.1	147	56.1	149	55.5	149	55.5	149	55.5
459.GemsFDTD	151	70.0	151	70.2	152	69.9	147	72.0	147	72.1	147	72.1
465.tonto	203	48.5	203	48.5	203	48.5	192	51.3	192	51.4	191	51.4
470.lbm	73.4	187	73.5	187	73.6	187	73.4	187	73.5	187	73.6	187
481.wrf	113	99.1	112	99.3	113	99.3	113	99.1	112	99.3	113	99.3
482.sphinx3	312	62.5	312	62.4	312	62.5	312	62.5	312	62.4	312	62.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

As tested, the system used a Supermicro CSE-731i-300B chassis.
The chassis is configured with a PWS-305-PQ power supply, 1 SNK-P0046A4 heatsink, as well as 1 FAN-0108L4 rear cooling fan.
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on C7Z170-01 Thu Nov 26 00:54:59 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp2006 = 71.7

SPECfp_base2006 = 70.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Core(TM) i3-6100TE CPU @ 2.70GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 2
  siblings  : 4
  physical 0: cores 0 1
cache size : 4096 KB

```

```

From /proc/meminfo
MemTotal:      16209832 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

```

```

uname -a:
Linux C7Z170-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 25 03:38

```

SPEC is set to: /usr/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2        xfs       183G      26G  158G  14% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0c 11/11/2015

Memory:
4x 0420 F4-2800C16-4GRK 4 GB 1 rank 2133 MHz

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp2006 = 71.7

SPECfp_base2006 = 70.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp2006 = 71.7

SPECfp_base2006 = 70.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp2006 = 71.7

SPECfp_base2006 = 70.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M , Intel Core i3-6100TE)

SPECfp2006 = 71.7

SPECfp_base2006 = 70.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 16 10:39:50 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 December 2015.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>