



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp®\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

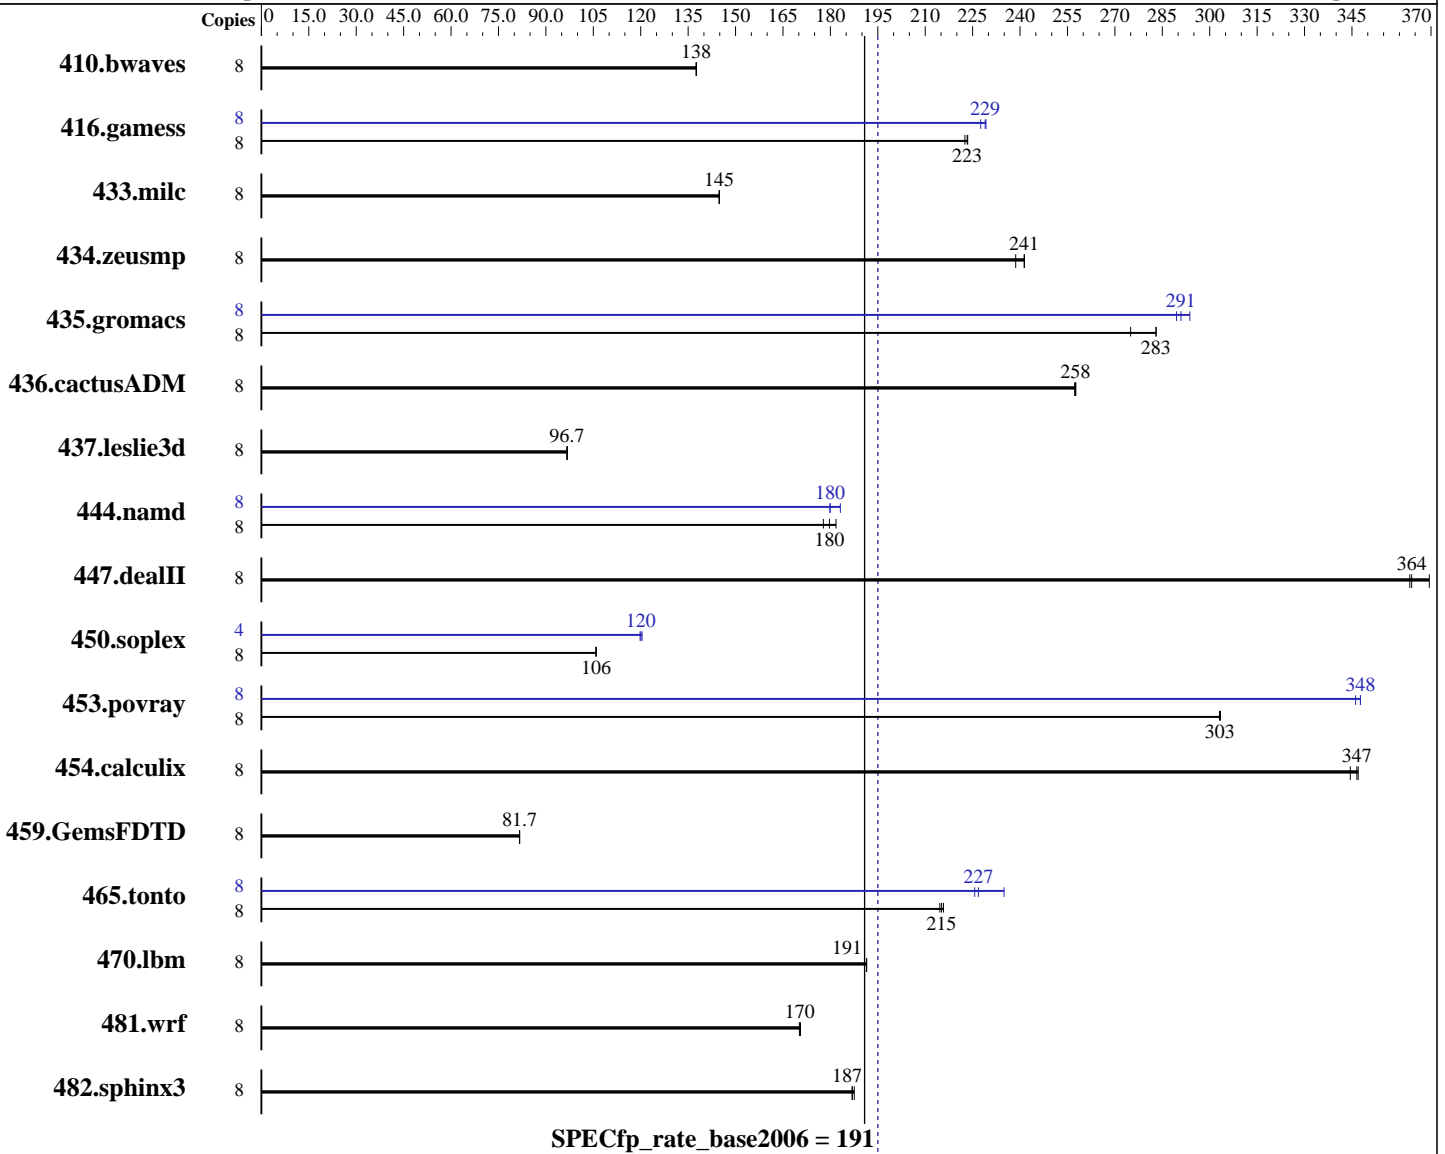

### Hardware

CPU Name: Intel Xeon E3-1280 v5  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-E)  
Disk Subsystem: 1 x 200 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	790	138	<b>790</b>	<b>138</b>	790	138	8	790	138	<b>790</b>	<b>138</b>	790	138
416.gamess	8	<b>702</b>	<b>223</b>	701	223	704	223	8	<b>684</b>	<b>229</b>	683	229	688	228
433.milc	8	507	145	<b>507</b>	<b>145</b>	507	145	8	507	145	<b>507</b>	<b>145</b>	507	145
434.zeusmp	8	305	239	302	241	<b>302</b>	<b>241</b>	8	305	239	302	241	<b>302</b>	<b>241</b>
435.gromacs	8	<b>202</b>	<b>283</b>	208	275	202	283	8	194	294	<b>196</b>	<b>291</b>	197	289
436.cactusADM	8	372	257	371	258	<b>371</b>	<b>258</b>	8	372	257	371	258	<b>371</b>	<b>258</b>
437.leslie3d	8	<b>778</b>	<b>96.7</b>	778	96.6	777	96.8	8	<b>778</b>	<b>96.7</b>	778	96.6	777	96.8
444.namd	8	361	178	353	182	<b>357</b>	<b>180</b>	8	<b>357</b>	<b>180</b>	357	180	350	183
447.dealII	8	248	369	<b>252</b>	<b>364</b>	252	363	8	248	369	<b>252</b>	<b>364</b>	252	363
450.soplex	8	630	106	630	106	<b>630</b>	<b>106</b>	4	<b>278</b>	<b>120</b>	277	120	278	120
453.povray	8	140	303	<b>140</b>	<b>303</b>	140	303	8	<b>122</b>	<b>348</b>	123	346	122	348
454.calculix	8	<b>190</b>	<b>347</b>	192	344	190	347	8	<b>190</b>	<b>347</b>	192	344	190	347
459.GemsFDTD	8	1039	81.7	<b>1039</b>	<b>81.7</b>	1039	81.7	8	1039	81.7	<b>1039</b>	<b>81.7</b>	1039	81.7
465.tonto	8	367	215	<b>366</b>	<b>215</b>	365	216	8	349	226	<b>347</b>	<b>227</b>	335	235
470.lbm	8	574	191	574	191	<b>574</b>	<b>191</b>	8	574	191	574	191	<b>574</b>	<b>191</b>
481.wrf	8	<b>525</b>	<b>170</b>	524	171	525	170	8	<b>525</b>	<b>170</b>	524	171	525	170
482.sphinx3	8	834	187	831	188	<b>834</b>	<b>187</b>	8	<b>834</b>	<b>187</b>	831	188	<b>834</b>	<b>187</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

As tested, the system used a Supermicro CSE-113MFAC2-R606CB chassis. The chassis is configured with 2 PWS-606P-1R redundant power supply, 1 SNK-P0046P heatsink, as well as 4 FAN-0154L4 middle cooling fan.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

### Platform Notes (Continued)

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on X11SSM-01 Tue Jan 12 07:03:23 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1280 v5 @ 3.70GHz
 1 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      32768248 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux X11SSM-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 11 19:16

SPEC is set to: /usr/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   183G  42G  141G  23% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0b 12/29/2015

Memory:

4x Micron 18ASF1G72AZ-2G1A1 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1280 v5)

SPECfp\_rate2006 = 195

SPECfp\_rate\_base2006 = 191

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Feb 9 17:20:23 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 February 2016.