



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECint®2006 = 74.7**

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECint\_base2006 = 72.9**

**CPU2006 license:** 9017


**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

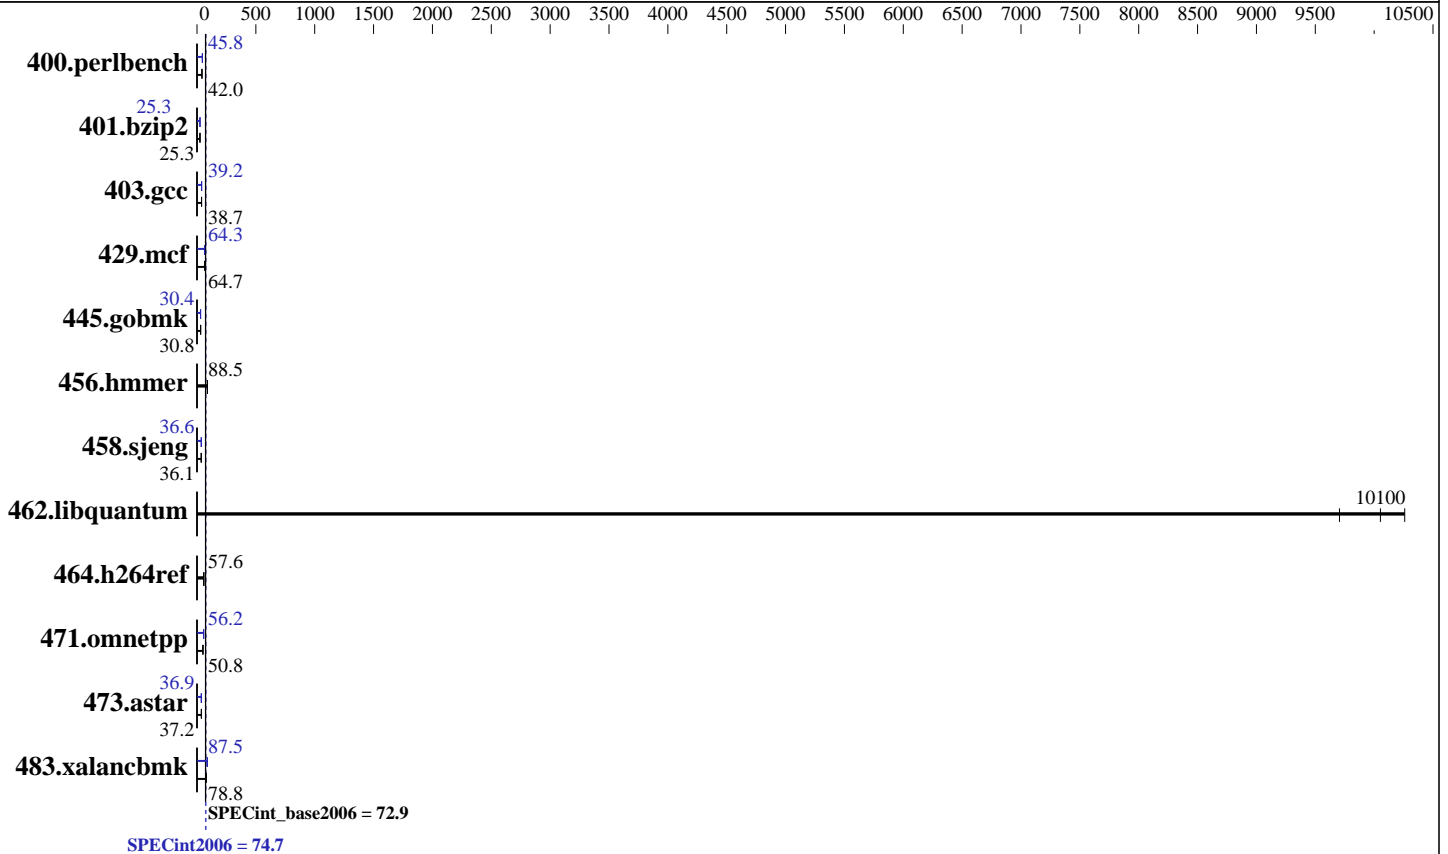

### Hardware

**CPU Name:** Intel Xeon E5-2699 v4  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.60 GHz  
**CPU MHz:** 2200  
**FPU:** Integrated  
**CPU(s) enabled:** 44 cores, 2 chips, 22 cores/chip  
**CPU(s) orderable:** 1,2 chips  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 256 KB I+D on chip per core  
**L3 Cache:** 55 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
**Disk Subsystem:** 1 x 800 GB SATA SSD  
**Other Hardware:** None

### Software

**Operating System:** SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
**Compiler:** C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
**Auto Parallel:** Yes  
**File System:** xfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32/64-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint2006 = **74.7**

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECint\_base2006 = **72.9**

CPU2006 license: 9017

Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	234	41.8	<b><u>233</u></b>	<b><u>42.0</u></b>	231	42.2	214	45.7	213	45.8	<b><u>214</u></b>	<b><u>45.8</u></b>
401.bzip2	<b><u>382</u></b>	<b><u>25.3</u></b>	383	25.2	381	25.3	381	25.3	382	25.3	<b><u>381</u></b>	<b><u>25.3</u></b>
403.gcc	<b><u>208</u></b>	<b><u>38.7</u></b>	208	38.7	207	38.8	205	39.2	206	39.1	<b><u>205</u></b>	<b><u>39.2</u></b>
429.mcf	142	64.1	<b><u>141</u></b>	<b><u>64.7</u></b>	139	65.6	<b><u>142</u></b>	<b><u>64.3</u></b>	142	64.2	141	64.5
445.gobmk	341	30.7	<b><u>341</u></b>	<b><u>30.8</u></b>	340	30.8	347	30.2	<b><u>345</u></b>	<b><u>30.4</u></b>	345	30.4
456.hammer	105	88.7	<b><u>105</u></b>	<b><u>88.5</u></b>	106	88.0	105	88.7	<b><u>105</u></b>	<b><u>88.5</u></b>	106	88.0
458.sjeng	335	36.2	335	36.1	<b><u>335</u></b>	<b><u>36.1</u></b>	<b><u>331</u></b>	<b><u>36.6</u></b>	331	36.6	331	36.6
462.libquantum	2.13	9710	<b><u>2.06</u></b>	<b><u>10100</u></b>	2.02	10300	2.13	9710	<b><u>2.06</u></b>	<b><u>10100</u></b>	2.02	10300
464.h264ref	<b><u>384</u></b>	<b><u>57.6</u></b>	386	57.3	383	57.8	<b><u>384</u></b>	<b><u>57.6</u></b>	386	57.3	383	57.8
471.omnetpp	128	48.7	<b><u>123</u></b>	<b><u>50.8</u></b>	122	51.3	110	56.8	<b><u>111</u></b>	<b><u>56.2</u></b>	111	56.1
473.astar	189	37.1	187	37.5	<b><u>189</u></b>	<b><u>37.2</u></b>	190	36.9	190	37.0	<b><u>190</u></b>	<b><u>36.9</u></b>
483.xalancbmk	86.3	80.0	87.9	78.5	<b><u>87.5</u></b>	<b><u>78.8</u></b>	78.8	87.6	79.0	87.3	<b><u>78.8</u></b>	<b><u>87.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Operating Mode set to Maximum Performance

Intel Hyperthreading set to Disabled

COD Preference set to Disable

Early Snoop Preference set to Disable

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1

running on linux-q4i7 Wed Feb 3 07:55:40 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz

2 "physical id"s (chips)

44 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint2006 = 74.7

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECint\_base2006 = 72.9

CPU2006 license: 9017

Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

### Platform Notes (Continued)

```

caution.)
  cpu cores : 22
  siblings  : 22
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
                28
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
                28
  cache size : 56320 KB

```

```

From /proc/meminfo
MemTotal:      263957836 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  # release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux linux-q4i7 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 3 07:32

```

SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        xfs       690G  11G  680G   2% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS LENOVO -[TCE123A-T-1.00]- 01/22/2016
Memory:
16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
8x NO DIMM Unknown

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint2006 = 74.7**

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECint\_base2006 = 72.9**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP\_NUM\_THREADS = "44"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 74.7

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECint\_base2006 = 72.9

CPU2006 license: 9017

Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 74.7

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECint\_base2006 = 72.9

CPU2006 license: 9017

Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

401.bzip2 (continued):

-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc

-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel

-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmcr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2)

-opt-ra-region-strategy=block

-ansi-alias

-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3650 M5  
(2.20 GHz, Intel Xeon E5-2699 v4)

**SPECint2006 = 74.7**

**SPECint\_base2006 = 72.9**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Feb-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Apr 6 10:44:43 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 April 2016.