



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp<sup>®</sup>\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

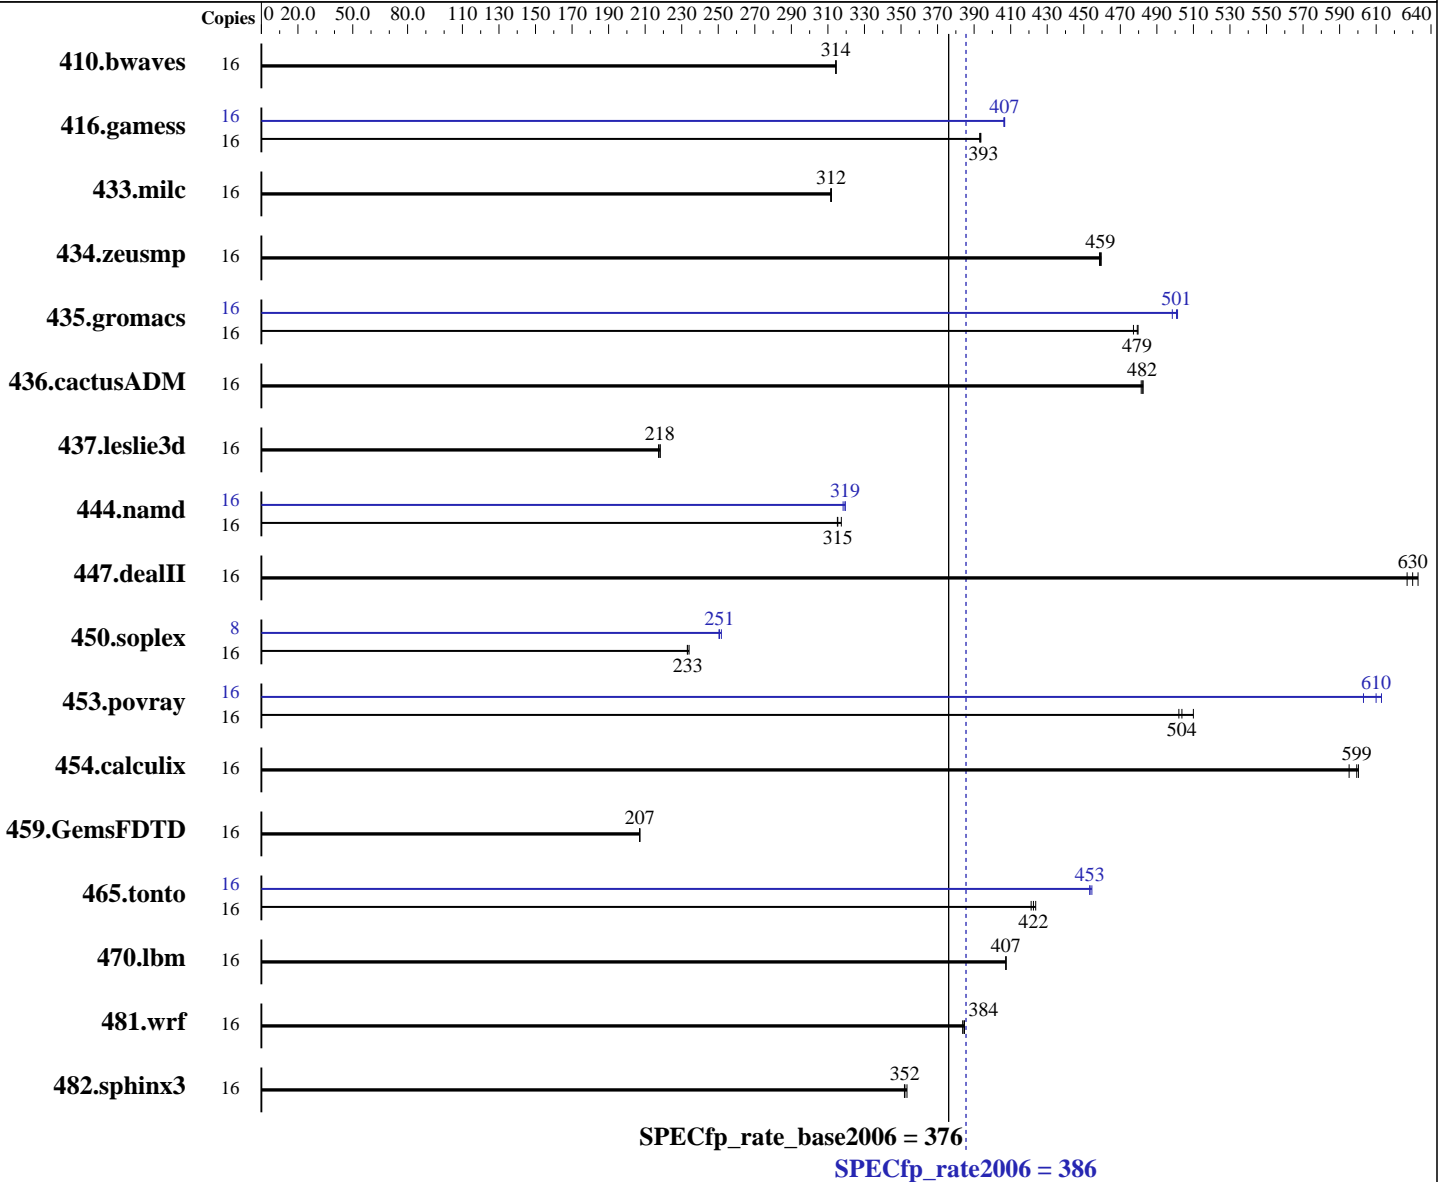

### Hardware

CPU Name: Intel Xeon E5-2667 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1, Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 200 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	692	314	<b>692</b>	<b>314</b>	691	315	16	692	314	<b>692</b>	<b>314</b>	691	315
416.gamess	16	<b>796</b>	<b>393</b>	797	393	796	394	16	771	406	770	407	<b>770</b>	<b>407</b>
433.milc	16	471	312	<b>471</b>	<b>312</b>	471	312	16	471	312	<b>471</b>	<b>312</b>	471	312
434.zeusmp	16	317	459	<b>317</b>	<b>459</b>	317	460	16	317	459	<b>317</b>	<b>459</b>	317	460
435.gromacs	16	<b>238</b>	<b>479</b>	238	480	239	477	16	228	501	229	498	<b>228</b>	<b>501</b>
436.cactusADM	16	397	481	396	483	<b>397</b>	<b>482</b>	16	397	481	396	483	<b>397</b>	<b>482</b>
437.leslie3d	16	689	218	692	217	<b>690</b>	<b>218</b>	16	689	218	692	217	<b>690</b>	<b>218</b>
444.namd	16	404	317	407	315	<b>407</b>	<b>315</b>	16	402	319	<b>402</b>	<b>319</b>	403	318
447.dealII	16	289	633	292	627	<b>291</b>	<b>630</b>	16	289	633	292	627	<b>291</b>	<b>630</b>
450.soplex	16	<b>572</b>	<b>233</b>	570	234	573	233	8	<b>266</b>	<b>251</b>	266	250	265	252
453.povray	16	<b>169</b>	<b>504</b>	167	510	170	502	16	<b>140</b>	<b>610</b>	141	603	139	613
454.calculix	16	222	595	220	600	<b>220</b>	<b>599</b>	16	222	595	220	600	<b>220</b>	<b>599</b>
459.GemsFDTD	16	<b>820</b>	<b>207</b>	820	207	820	207	16	<b>820</b>	<b>207</b>	820	207	820	207
465.tonto	16	374	421	<b>373</b>	<b>422</b>	372	424	16	347	453	<b>347</b>	<b>453</b>	346	454
470.lbm	16	540	407	<b>540</b>	<b>407</b>	540	407	16	540	407	<b>540</b>	<b>407</b>	540	407
481.wrf	16	466	384	465	385	<b>465</b>	<b>384</b>	16	466	384	465	385	<b>465</b>	<b>384</b>
482.sphinx3	16	886	352	883	353	<b>886</b>	<b>352</b>	16	886	352	883	353	<b>886</b>	<b>352</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Early Snoop = Disable  
Enforce POR = Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** May-2016  
**Hardware Availability:** Mar-2016  
**Software Availability:** Sep-2015

### Platform Notes (Continued)

Memory Frequency = 2400  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on X10SRH-01 Sun May 15 21:54:58 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2667 v4 @ 3.20GHz
 1 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 2 3 4 8 10 11 12
  cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132184940 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux X10SRH-01 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 15 09:32
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   145G  22G  124G  15% /home
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

8x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

## Base Portability Flags (Continued)

444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
          -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage Server 5048R-E1CR36L  
(X10SRH-CLN4F , Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 386

SPECfp\_rate\_base2006 = 376

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jun 1 19:10:36 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 June 2016.