



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp<sup>®</sup>\_rate2006 = 387

Express5800/R120g-1E (Intel Xeon E5-2650L v4)

SPECfp\_rate\_base2006 = 377

CPU2006 license: 9006


Test date: Jun-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

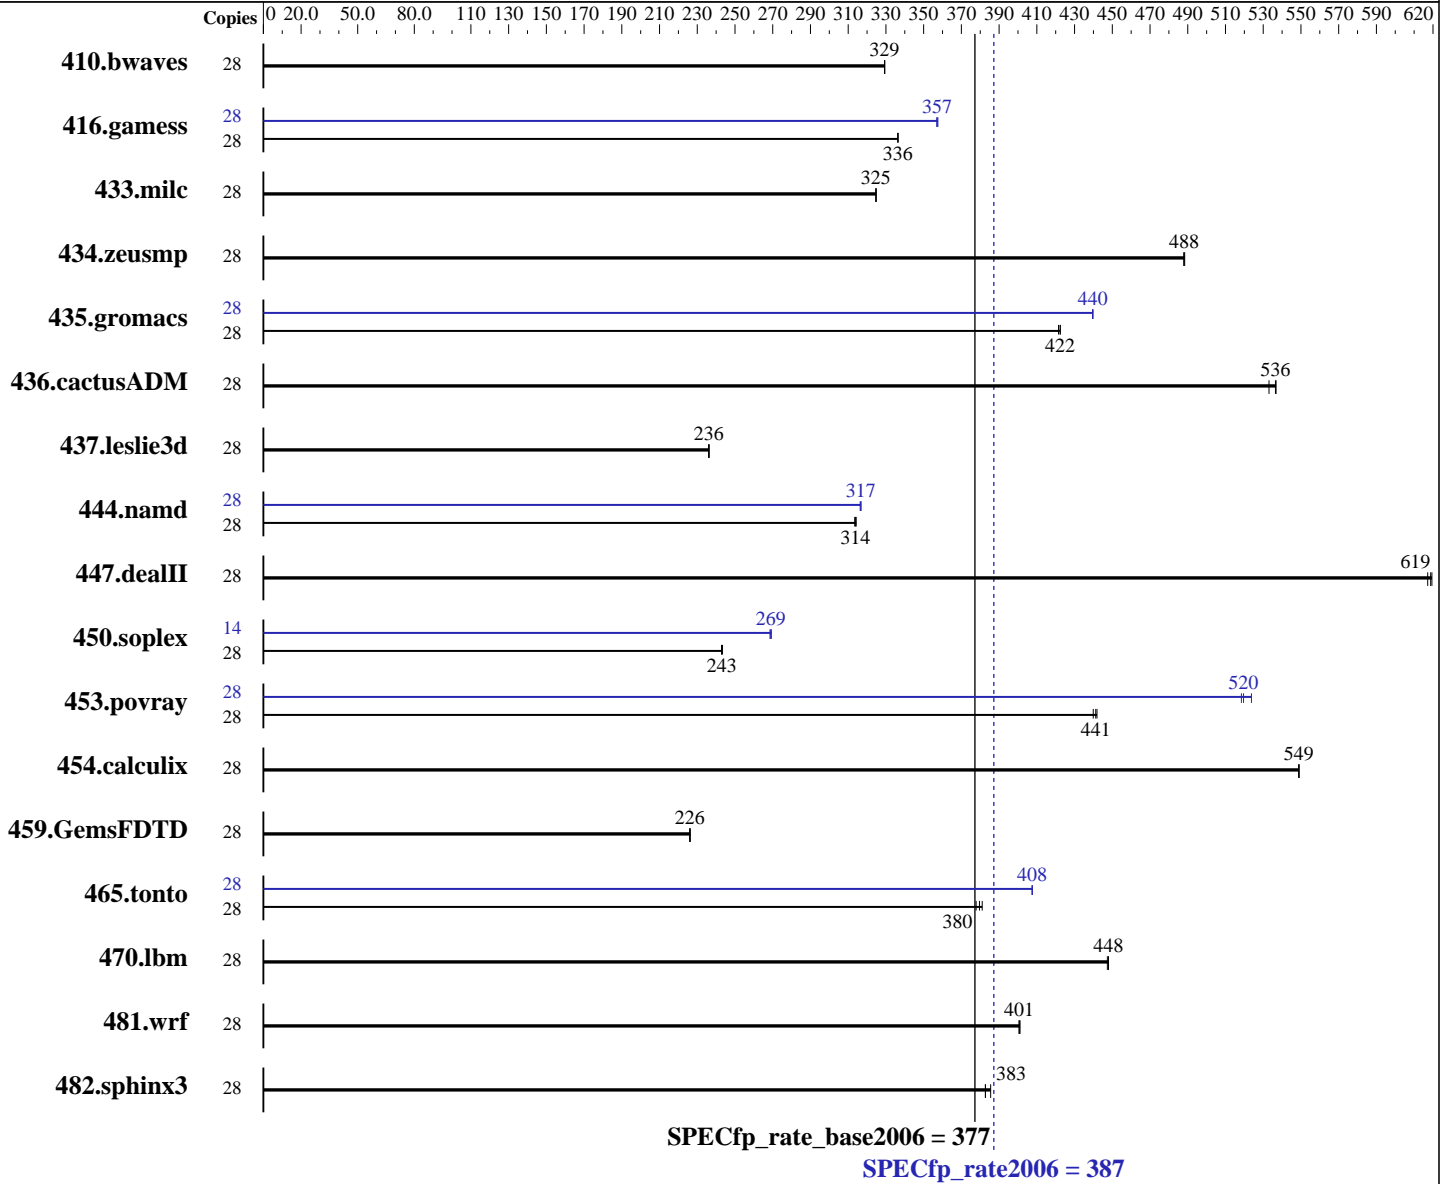

### Hardware

CPU Name: Intel Xeon E5-2650L v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 14 cores, 1 chip, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Kernel 3.10.0-327.4.5.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp\_rate2006 = 387

Express5800/R120g-1E (Intel Xeon E5-2650L v4)

SPECfp\_rate\_base2006 = 377

CPU2006 license: 9006

Test date: Jun-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	28	1156	329	<b><u>1156</u></b>	<b><u>329</u></b>	1155	329	28	1156	329	<b><u>1156</u></b>	<b><u>329</u></b>	1155	329		
416.gamess	28	1630	336	1630	336	<b><u>1630</u></b>	<b><u>336</u></b>	28	1533	358	<b><u>1535</u></b>	<b><u>357</u></b>	1536	357		
433.milc	28	<b><u>792</u></b>	<b><u>325</u></b>	792	325	791	325	28	<b><u>792</u></b>	<b><u>325</u></b>	792	325	791	325		
434.zeusmp	28	<b><u>522</u></b>	<b><u>488</u></b>	522	488	522	488	28	<b><u>522</u></b>	<b><u>488</u></b>	522	488	522	488		
435.gromacs	28	<b><u>473</u></b>	<b><u>422</u></b>	474	421	473	422	28	455	440	<b><u>455</u></b>	<b><u>440</u></b>	455	440		
436.cactusADM	28	623	537	<b><u>624</u></b>	<b><u>536</u></b>	628	533	28	623	537	<b><u>624</u></b>	<b><u>536</u></b>	628	533		
437.leslie3d	28	1115	236	<b><u>1115</u></b>	<b><u>236</u></b>	1114	236	28	1115	236	<b><u>1115</u></b>	<b><u>236</u></b>	1114	236		
444.namd	28	<b><u>716</u></b>	<b><u>314</u></b>	716	313	715	314	28	710	316	709	317	<b><u>709</u></b>	<b><u>317</u></b>		
447.dealII	28	517	619	519	617	<b><u>518</u></b>	<b><u>619</u></b>	28	517	619	519	617	<b><u>518</u></b>	<b><u>619</u></b>		
450.soplex	28	959	243	<b><u>961</u></b>	<b><u>243</u></b>	962	243	14	435	269	434	269	<b><u>434</u></b>	<b><u>269</u></b>		
453.povray	28	337	442	339	440	<b><u>338</u></b>	<b><u>441</u></b>	28	284	524	<b><u>287</u></b>	<b><u>520</u></b>	287	518		
454.calculix	28	421	549	421	549	<b><u>421</u></b>	<b><u>549</u></b>	28	421	549	421	549	<b><u>421</u></b>	<b><u>549</u></b>		
459.GemsFDTD	28	1315	226	1313	226	<b><u>1314</u></b>	<b><u>226</u></b>	28	1315	226	1313	226	<b><u>1314</u></b>	<b><u>226</u></b>		
465.tonto	28	723	381	<b><u>726</u></b>	<b><u>380</u></b>	729	378	28	676	408	<b><u>676</u></b>	<b><u>408</u></b>	676	408		
470.lbm	28	860	447	859	448	<b><u>859</u></b>	<b><u>448</u></b>	28	860	447	859	448	<b><u>859</u></b>	<b><u>448</u></b>		
481.wrf	28	<b><u>781</u></b>	<b><u>401</u></b>	780	401	781	401	28	<b><u>781</u></b>	<b><u>401</u></b>	780	401	781	401		
482.sphinx3	28	1416	386	<b><u>1426</u></b>	<b><u>383</u></b>	1426	383	28	1416	386	<b><u>1426</u></b>	<b><u>383</u></b>	1426	383		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Power Management Policy: Custom  
Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 387

Express5800/R120g-1E (Intel Xeon E5-2650L v4)

SPECfp\_rate\_base2006 = 377

CPU2006 license: 9006

Test date: Jun-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

## Platform Notes (Continued)

Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 387

Express5800/R120g-1E (Intel Xeon E5-2650L v4)

SPECfp\_rate\_base2006 = 377

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Jan-2016

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 387

Express5800/R120g-1E (Intel Xeon E5-2650L v4)

SPECfp\_rate\_base2006 = 377

CPU2006 license: 9006

Test date: Jun-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

## Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 387**

**Express5800/R120g-1E (Intel Xeon E5-2650L v4)**

**SPECfp\_rate\_base2006 = 377**

**CPU2006 license:** 9006

**Test date:** Jun-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jun-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:29:19 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.