



SPEC[®] CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint[®]_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35


Test date: Jun-2016

Test sponsor: HITACHI

Hardware Availability: Jun-2016

Tested by: HITACHI

Software Availability: Mar-2016

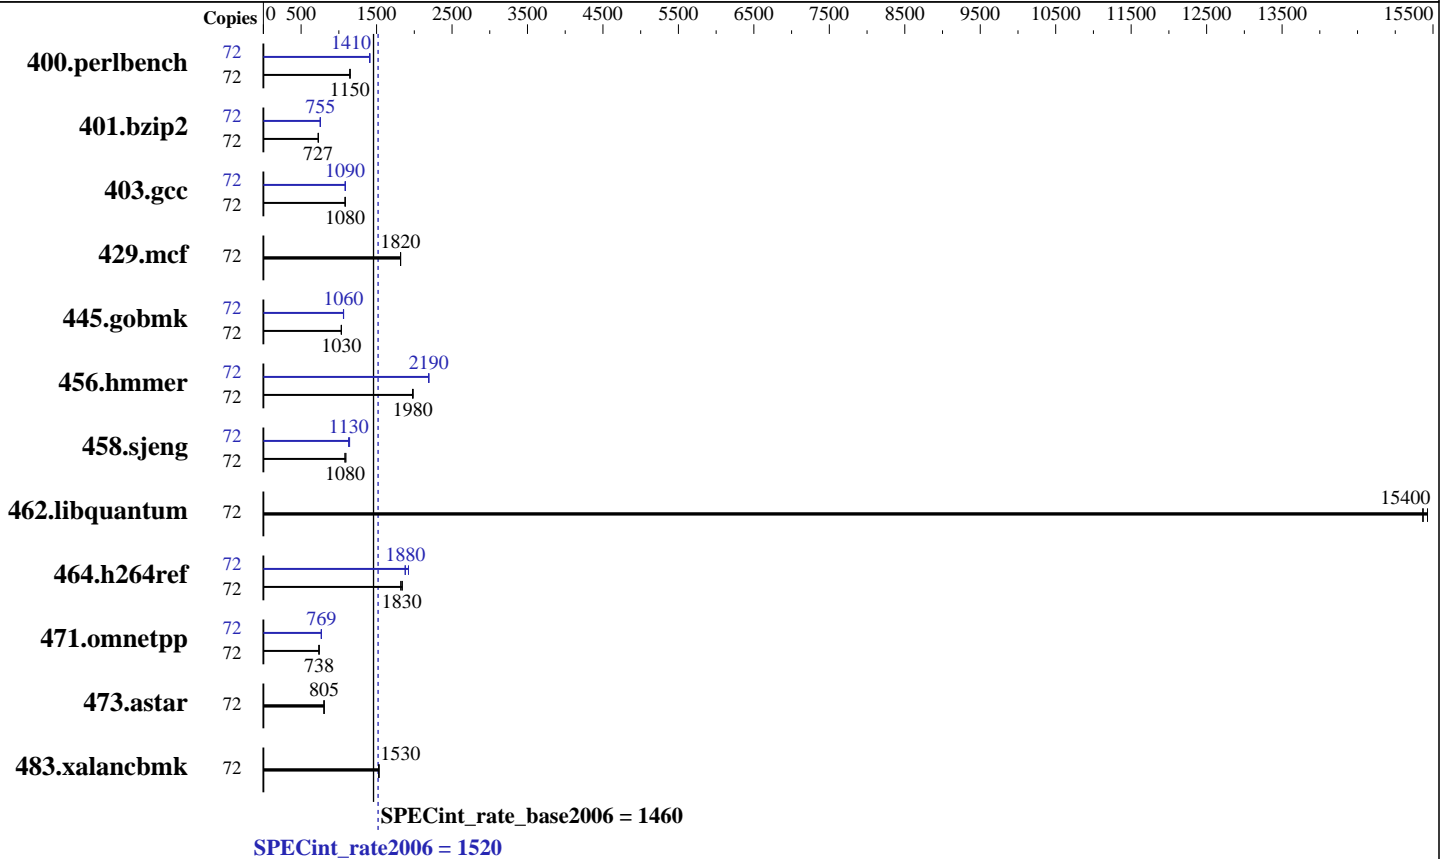

Hardware

CPU Name: Intel Xeon E5-2697 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 2 x 300 GB SAS, 15000 RPM, RAID1
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Jun-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	<u>613</u>	<u>1150</u>	611	1150	614	1150	72	498	1410	500	1410	<u>499</u>	<u>1410</u>
401.bzip2	72	955	727	<u>955</u>	<u>727</u>	954	728	72	923	753	<u>920</u>	<u>755</u>	920	755
403.gcc	72	<u>534</u>	<u>1080</u>	534	1080	535	1080	72	535	1080	533	1090	<u>534</u>	<u>1090</u>
429.mcf	72	<u>361</u>	<u>1820</u>	361	1820	361	1820	72	<u>361</u>	<u>1820</u>	361	1820	361	1820
445.gobmk	72	<u>731</u>	<u>1030</u>	731	1030	732	1030	72	<u>711</u>	<u>1060</u>	711	1060	712	1060
456.hammer	72	<u>339</u>	<u>1980</u>	340	1980	338	1980	72	<u>306</u>	<u>2190</u>	307	2190	306	2190
458.sjeng	72	796	1090	806	1080	<u>804</u>	<u>1080</u>	72	<u>768</u>	<u>1130</u>	771	1130	762	1140
462.libquantum	72	<u>97.1</u>	<u>15400</u>	97.1	15400	96.7	15400	72	<u>97.1</u>	<u>15400</u>	97.1	15400	96.7	15400
464.h264ref	72	876	1820	<u>869</u>	<u>1830</u>	865	1840	72	<u>847</u>	<u>1880</u>	848	1880	829	1920
471.omnetpp	72	608	740	<u>610</u>	<u>738</u>	612	735	72	584	770	587	766	<u>585</u>	<u>769</u>
473.astar	72	<u>628</u>	<u>805</u>	627	806	630	802	72	<u>628</u>	<u>805</u>	627	806	630	802
483.xalancbmk	72	325	1530	324	1530	<u>324</u>	<u>1530</u>	72	325	1530	324	1530	<u>324</u>	<u>1530</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Patrol Scrub = Disable
Per Core P-state = Disable
COD Preference = Enable

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on rhel722 Mon Jun 6 16:18:43 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz
2 "physical id"s (chips)
72 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

From /proc/meminfo

```
MemTotal:      527316988 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux rhel722 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 6 15:37

SPEC is set to: /home/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  225G  23G  202G  11% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HITACHI 10-00 01/29/2016

Memory:

```
8x NO DIMM Unknown
16x Samsung M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

BladeSymphony BS520H, Hitachi Compute Blade 520H and BladeSymphony BS2500 are electronically equivalent.

The results have been measured on a Hitachi Compute Blade 520H.

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -D_FILE_OFFSET_BITS=64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64

458.sjeng: -D_FILE_OFFSET_BITS=64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 1520

BladeSymphony BS520H (Intel Xeon E5-2697 v4)

SPECint_rate_base2006 = 1460

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 28 17:31:10 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 June 2016.