SPEC® CFP2006 Result

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Core i7-6700K)

SPECfp®_rate2006 = 187

SPECfp_rate_base2006 = 182

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

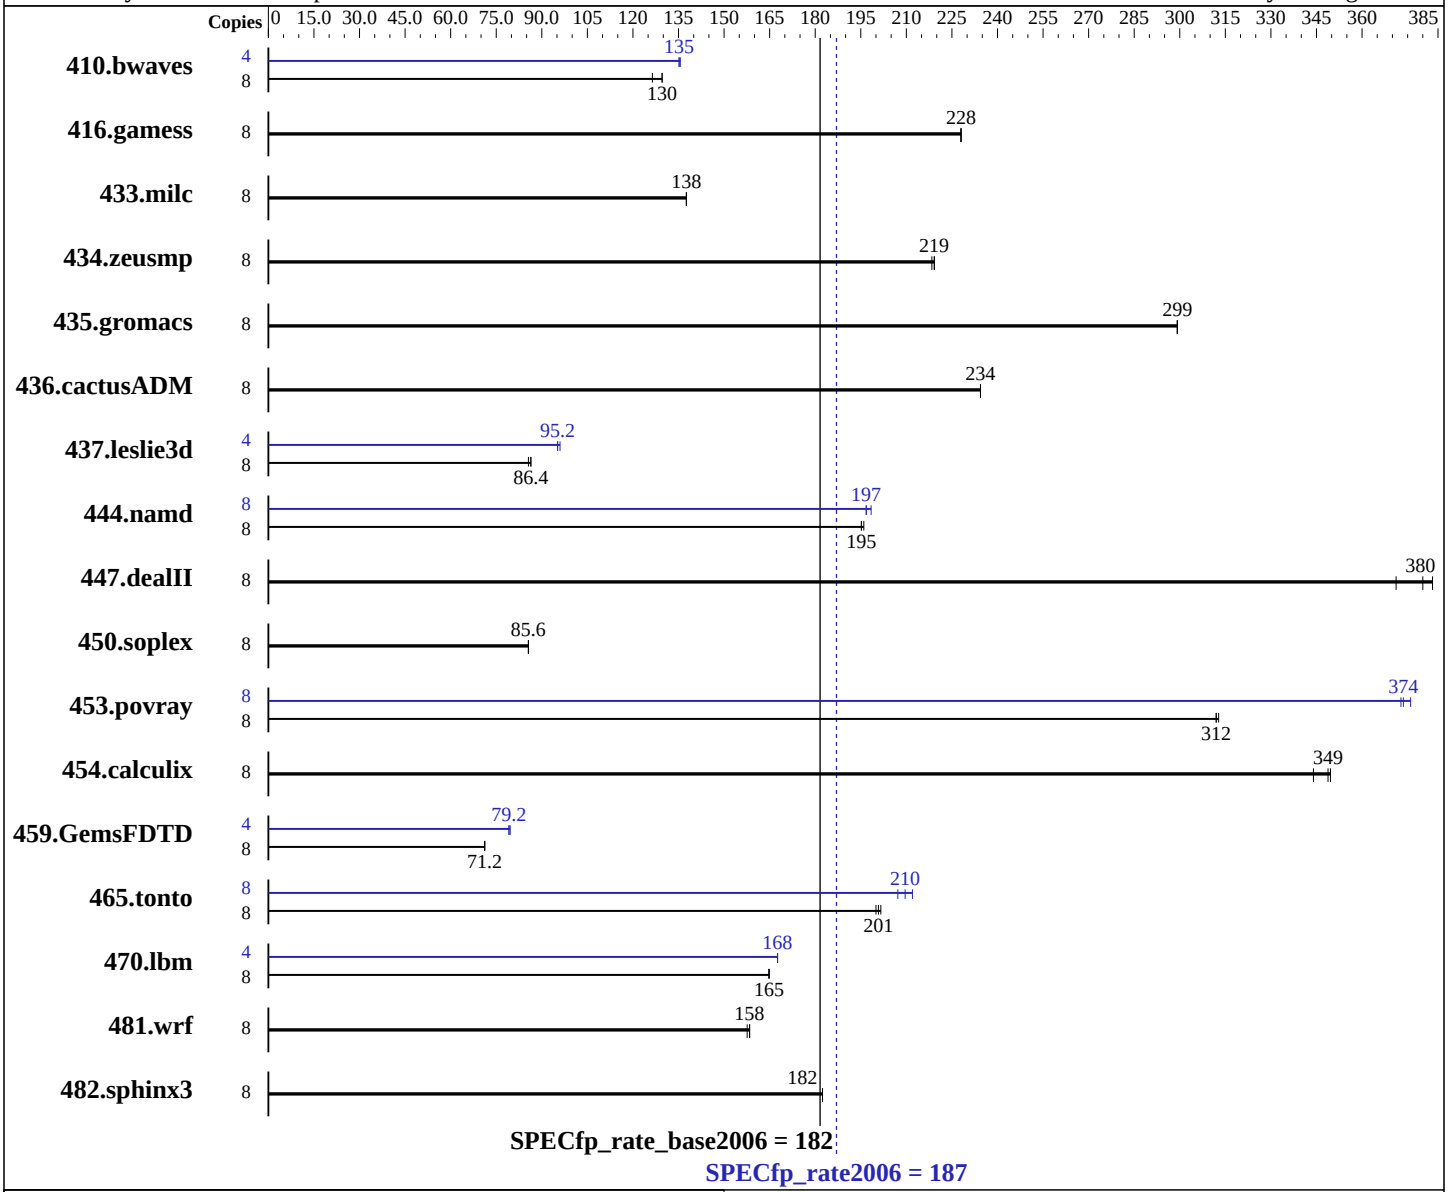

Hardware

CPU Name:	Intel Core i7-6700K
CPU Characteristics:	Intel Turbo Boost Technology up to 4.20 GHz
CPU MHz:	4000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Core i7-6700K)

SPECfp_rate2006 = 187

SPECfp_rate_base2006 = 182

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
Disk Subsystem:	1 TB Seagate Barracuda HDD, 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	861	126	841	130	**841**	**130**	4	402	135	401	136	**402**	**135**
416.gamess	8	688	228	**687**	**228**	686	228	8	688	228	**687**	**228**	686	228
433.milc	8	534	138	**534**	**138**	534	138	8	534	138	**534**	**138**	534	138
434.zeusmp	8	332	219	333	218	**333**	**219**	8	332	219	333	218	**333**	**219**
435.gromacs	8	**191**	**299**	191	299	191	299	8	**191**	**299**	191	299	191	299
436.cactusADM	8	408	234	408	234	**408**	**234**	8	408	234	408	234	**408**	**234**
437.leslie3d	8	**873**	**86.4**	876	85.6	871	86.4	4	395	95.2	**394**	**95.2**	392	96.0
444.namd	8	**329**	**195**	328	196	329	195	8	324	198	**326**	**197**	326	197
447.dealII	8	247	371	**241**	**380**	239	383	8	247	371	**241**	**380**	239	383
450.soplex	8	**779**	**85.6**	782	85.6	778	85.6	8	**779**	**85.6**	782	85.6	778	85.6
453.povray	8	**136**	**312**	136	312	136	313	8	114	373	113	376	**114**	**374**
454.calculix	8	192	344	**189**	**349**	189	350	8	192	344	**189**	**349**	189	350
459.GemsFDTD	8	**1190**	**71.2**	1190	71.2	1192	71.2	4	536	79.2	533	79.6	**536**	**79.2**
465.tonto	8	393	200	391	202	**392**	**201**	8	372	212	**375**	**210**	380	207
470.lbm	8	667	165	**667**	**165**	667	165	4	**328**	**168**	328	168	328	168
481.wrf	8	566	158	565	158	**566**	**158**	8	566	158	565	158	**566**	**158**
482.sphinx3	8	854	182	856	182	**855**	**182**	8	854	182	856	182	**855**	**182**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltF832E48856E2 Tue Mar  8 19:03:15 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Professional
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~4001 Mhz
BIOS Version  : American Megatrends Inc. 0704, 1/12/2016
Total Physical Memory: 8,069 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 8192
MaxClockSpeed : 4001
Name          : Intel(R) Core(TM) i7-6700K CPU @ 4.00GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxx11_make_pair" src.alt was used.

 Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
 + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc12
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc12 -Qstd=c99 ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_P64
    416.gamess: -DSPEC_CPU_P64
      433.milc: -DSPEC_CPU_P64
   434.zeusmp: -DSPEC_CPU_P64
   435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
   437.leslie3d: -DSPEC_CPU_P64
     444.namd: -DSPEC_CPU_P64 /TP
    447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
                -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
    450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
    453.povray: -DSPEC_CPU_P64
   454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
      465.tonto: -DSPEC_CPU_P64
       470.lbm: -DSPEC_CPU_P64
       481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
   482.sphinx3: -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -QxCORE-AVX2 -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:02:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.