



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

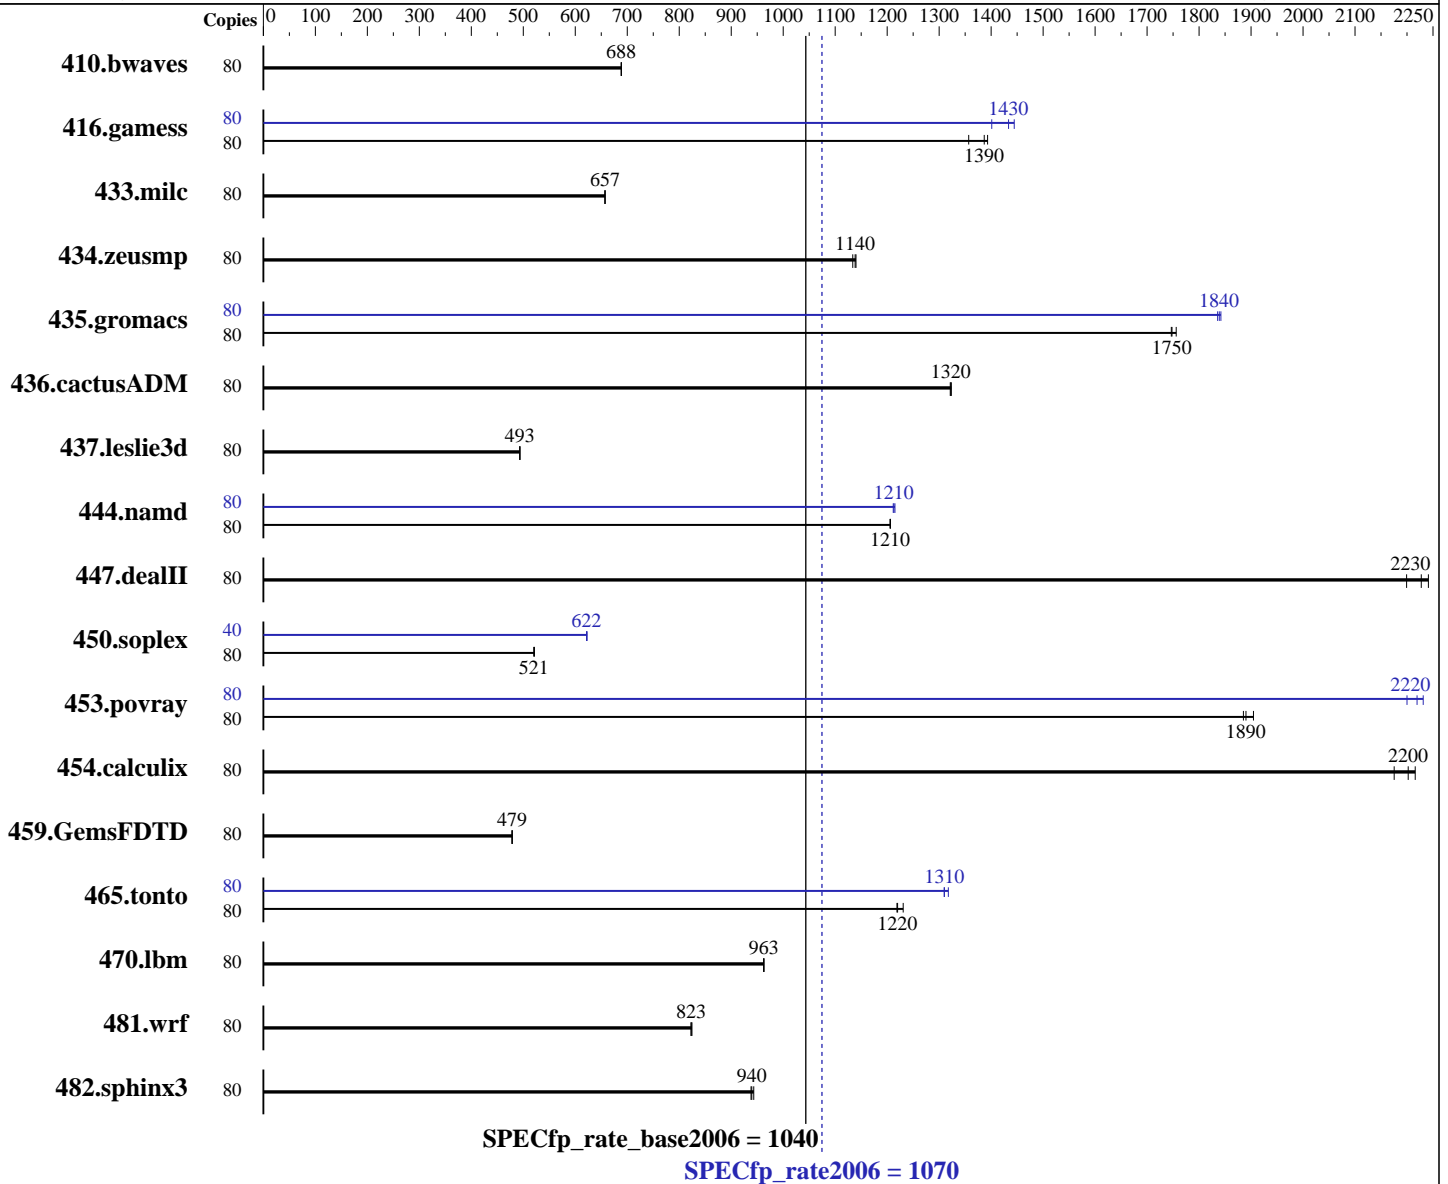

Hardware

CPU Name: Intel Xeon E5-2698 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

L3 Cache: 50 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1579	689	<u>1579</u>	<u>688</u>	1579	688	80	1579	689	<u>1579</u>	<u>688</u>	1579	688
416.gamess	80	1124	1390	1154	1360	<u>1130</u>	<u>1390</u>	80	1118	1400	<u>1093</u>	<u>1430</u>	1084	1440
433.milc	80	<u>1117</u>	<u>657</u>	1117	657	1118	657	80	<u>1117</u>	<u>657</u>	1117	657	1118	657
434.zeusmp	80	639	1140	642	1130	<u>640</u>	<u>1140</u>	80	639	1140	642	1130	<u>640</u>	<u>1140</u>
435.gromacs	80	327	1750	325	1760	<u>327</u>	<u>1750</u>	80	310	1840	<u>311</u>	<u>1840</u>	311	1840
436.cactusADM	80	722	1320	<u>723</u>	<u>1320</u>	723	1320	80	722	1320	<u>723</u>	<u>1320</u>	723	1320
437.leslie3d	80	<u>1524</u>	<u>493</u>	1524	494	1525	493	80	<u>1524</u>	<u>493</u>	1524	494	1525	493
444.namd	80	<u>532</u>	<u>1210</u>	532	1210	532	1210	80	528	1210	530	1210	<u>529</u>	<u>1210</u>
447.dealII	80	416	2200	<u>411</u>	<u>2230</u>	408	2240	80	416	2200	<u>411</u>	<u>2230</u>	408	2240
450.soplex	80	1280	521	<u>1282</u>	<u>521</u>	1282	520	40	<u>537</u>	<u>622</u>	537	622	536	623
453.povray	80	226	1890	<u>225</u>	<u>1890</u>	223	1900	80	<u>192</u>	<u>2220</u>	191	2230	193	2200
454.calculix	80	298	2220	303	2180	<u>300</u>	<u>2200</u>	80	298	2220	303	2180	<u>300</u>	<u>2200</u>
459.GemsFDTD	80	1774	478	<u>1774</u>	<u>479</u>	1773	479	80	1774	478	<u>1774</u>	<u>479</u>	1773	479
465.tonto	80	<u>645</u>	<u>1220</u>	646	1220	640	1230	80	597	1320	<u>601</u>	<u>1310</u>	601	1310
470.lbm	80	1142	962	<u>1142</u>	<u>963</u>	1141	963	80	1142	962	<u>1142</u>	<u>963</u>	1141	963
481.wrf	80	1084	824	<u>1086</u>	<u>823</u>	1086	823	80	1084	824	<u>1086</u>	<u>823</u>	1086	823
482.sphinx3	80	1662	938	1653	943	<u>1659</u>	<u>940</u>	80	1662	938	1653	943	<u>1659</u>	<u>940</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Set Snoop Mode to COD mode

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Platform Notes (Continued)

```

Set Patrol Scrub to Disable
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed Oct 26 18:55:04 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2698 v4 @ 2.20GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 20
  siblings  : 40
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 25600 KB

```

```

From /proc/meminfo
MemTotal:      527786160 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 25 15:29

```

SPEC is set to: /spec16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   911G  79G  833G   9% /

```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.32 09/14/2016

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei CH121 V3 and Huawei CH222 V3

are electronically equivalent.

The results have been measured on a Huawei CH121 V3 model

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Mar-2016

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1070

Huawei CH222 V3 (Intel Xeon E5-2698 v4)

SPECfp_rate_base2006 = 1040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 15 16:07:40 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2016.