



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2

SPECfp[®]_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

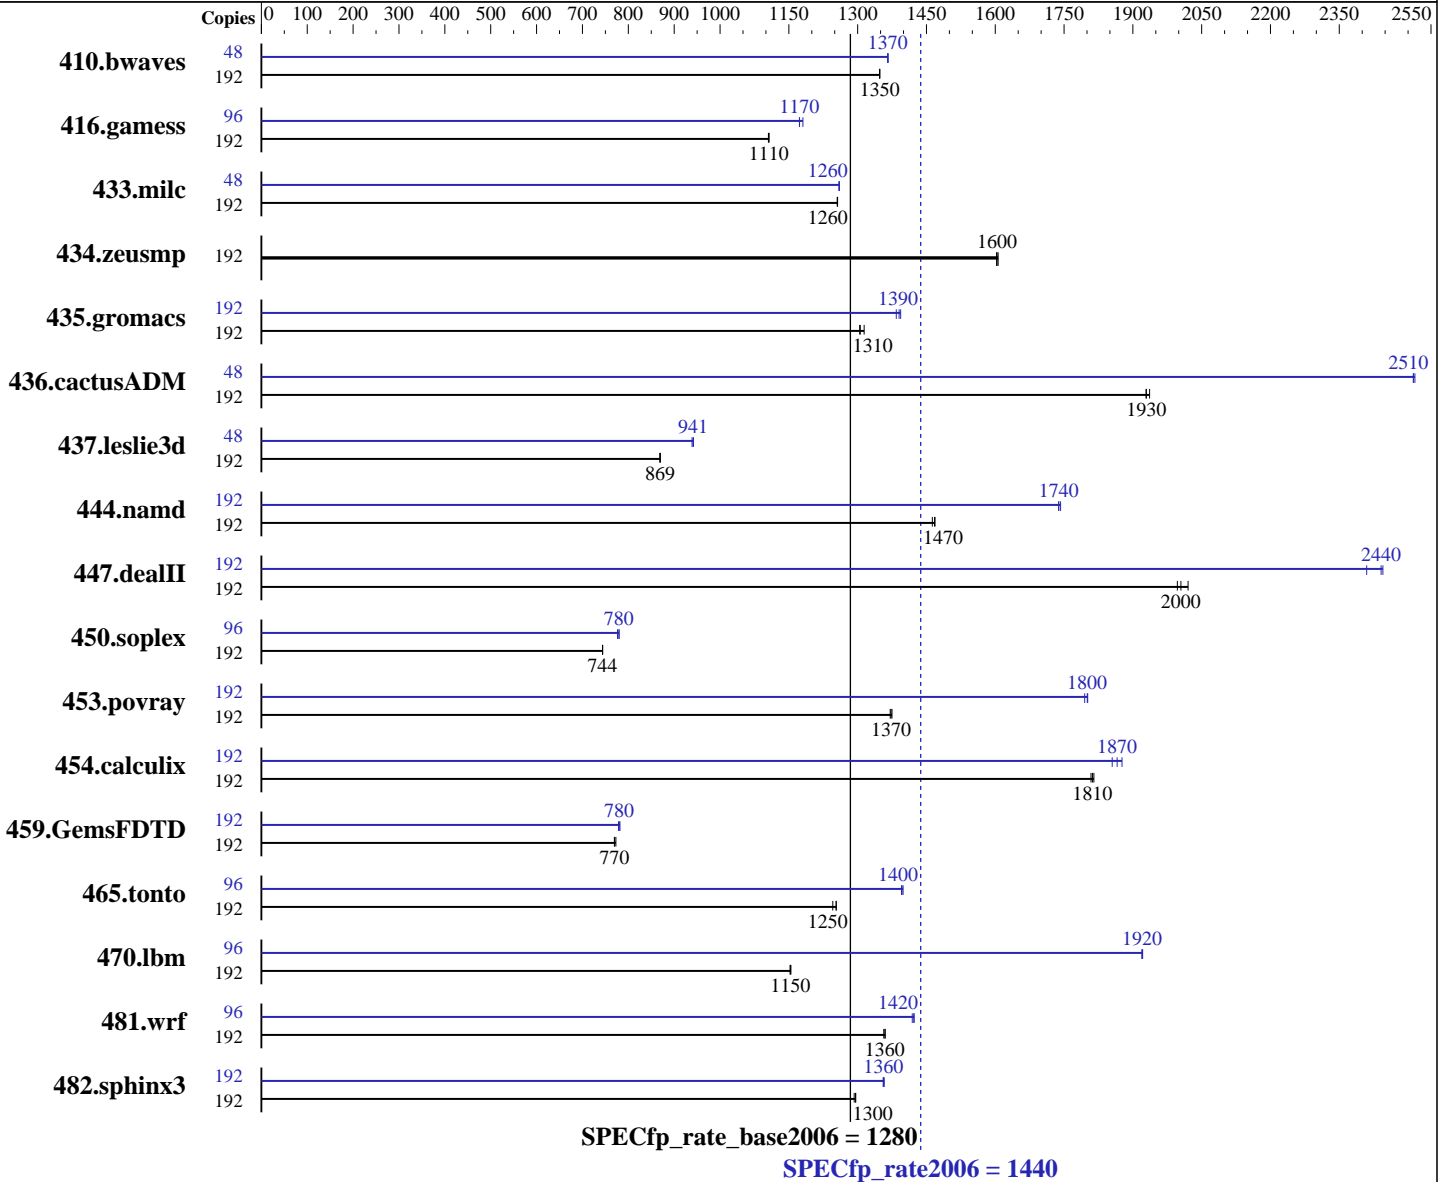

Hardware

CPU Name: SPARC64 XII
 CPU Characteristics:
 CPU MHz: 3900
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 8 threads/core
 CPU(s) orderable: 1 or 2 CPU chips; the number of orderable total cores is 2, 3, 4, .. 24
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Solaris 11.3 (with June 2017 SRU)
 Compiler: C/C++/Fortran: Version 12.6 of Oracle Developer Studio
 Auto Parallel: No
 File System: tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

L3 Cache: 32 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 600 GB 10K RPM SAS (for system disk)
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	1936	1350	1936	1350	1936	1350	48	478	1370	478	1370	478	1370
416.gamess	192	3397	1110	3401	1110	3397	1110	96	1592	1180	1602	1170	1602	1170
433.milc	192	1404	1260	1403	1260	1403	1260	48	350	1260	350	1260	350	1260
434.zeusmp	192	1090	1600	1088	1610	1089	1600	192	1090	1600	1088	1610	1089	1600
435.gromacs	192	1043	1310	1050	1310	1051	1300	192	986	1390	984	1390	990	1380
436.cactusADM	192	1185	1940	1189	1930	1190	1930	48	228	2510	228	2510	228	2510
437.leslie3d	192	2075	870	2077	869	2076	869	48	479	941	481	939	479	942
444.namd	192	1049	1470	1053	1460	1048	1470	192	886	1740	884	1740	886	1740
447.dealII	192	1100	2000	1087	2020	1096	2000	192	900	2440	898	2450	911	2410
450.soplex	192	2153	744	2153	744	2152	744	96	1027	780	1027	780	1031	776
453.povray	192	743	1370	745	1370	744	1370	192	569	1790	567	1800	567	1800
454.calculix	192	873	1820	874	1810	876	1810	192	854	1850	844	1880	849	1870
459.GemsFDTD	192	2645	770	2636	773	2647	770	192	2611	780	2617	779	2606	782
465.tonto	192	1508	1250	1507	1250	1517	1250	96	676	1400	677	1400	675	1400
470.lbm	192	2285	1150	2286	1150	2289	1150	96	687	1920	687	1920	687	1920
481.wrf	192	1580	1360	1577	1360	1578	1360	96	754	1420	756	1420	754	1420
482.sphinx3	192	2889	1300	2895	1290	2888	1300	192	2756	1360	2760	1360	2759	1360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Operating System Notes (Continued)

```
(/etc/system parameters)
autoup = 86400
  Causes pages older than the listed number of seconds to be written by fsflush.
doiflush = 0
  Controls whether file system metadata syncs will be executed during fsflush invocations.
dopageflush = 0
  Controls whether memory is examined for modified pages during fsflush invocations.
zfs:zfs_arc_max=1073741824
  Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).
```

Platform Notes

```
Sysinfo program /export/cpu2006/config/sysinfo
Revision 6993 of 2015-11-06 (975e92c7086bc383773e22882bdda8dd)
running on H2S-210-D0 Sat Mar 4 19:45:17 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo
  SPARC64-XII (chipid 0, clock 3900 MHz)
  SPARC64-XII (chipid 1, clock 3900 MHz)
  2 chips
  192 threads
  3900 MHz

From kstat:          24 cores

From prtconf: 1046016 Megabytes

/etc/release:
  Oracle Solaris 11.3 SPARC
uname -a:
  SunOS H2S-210-D0 5.11 11.3 sun4v sparc sun4v
```

SPEC is set to: /export/cpu2006

```
disk: df -h /export/cpu2006
Filesystem      Size  Used Available Capacity  Mounted on
rpool/export    547G  2.7G   401G      1%    /export
```

(End of data from sysinfo program)

General Notes

File System:
tmpfs: output_root was used to put run directories in /tmp/cpu2006
zfs: operating system

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

General Notes (Continued)

SPEC CPU2006 benchmark:
Updated with runspec --update

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Portability Flags

447.dealIII: -DBOOST_NO_COMPILER_CONFIG

Base Optimization Flags

C benchmarks:
-std=c99 -m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std -xprefetch_level=2

C++ benchmarks:
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=compatible
-library=stlport4

Fortran benchmarks:
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xvector=no%lib

Benchmarks using both Fortran and C:
-std=c99 -m32 -fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2
-xpagesize=4M -xsegment_align=4M -xthroughput -xalias_level=std
-xprefetch_level=2 -xvector=no%lib



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Base Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Fortran benchmarks:
-xjobs=8

Benchmarks using both Fortran and C:
-xjobs=8

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Portability Flags

447.dealII: -DBOOST_NO_COMPILER_CONFIG

Peak Optimization Flags

C benchmarks:

433.milc: -std=c99 -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xipo=2 -xalias_level=std
-fsimple=1 -W2,-Ainline:rs=400
-Qoption cg -Qms_pipe+alldoall -W2,-Asac -xthroughput=no

470.lbm: -std=c99 -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xipo=2 -xalias_level=std
-xprefetch_level=2 -xpagesize=256M -xsegment_align=256M
-xthroughput=no -lbsdmalloc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Optimization Flags (Continued)

482.sphinx3: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xO4 -xipo=2 -xprefetch=latx:0.6
-xinline_param=level:1 -xprefetch=no%auto -lbsdmalloc

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xalias_level=compatible -xprefetch=no%auto
-Wc,-Qms_pipe+alldoall

447.dealII: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xtarget=sparc64xplus -xipo=1
-xalias_level=compatible -xrestrict -xprefetch=no%auto
-Qoption cg -Qiselect-funcalign=64 -xthroughput=yes
-library=stdcxx4 -template=extdef

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xipo=2 -Wc,-Qlp=0

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xO4 -xtarget=sparc64xplus -xipo=2
-xalias_level=compatible -xlinkopt=2 -xprefetch=no%auto
-xunroll=7 -Qoption iropt -Ainline:rs=1024
-Qoption iropt -Ainline:cs=1024
-Qoption iropt -Ainline:inc=900 -lfast

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xipo=2 -xunroll=4 -xvector=%none
-xprefetch=no%auto

416.gamess: -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xvector=no%simd
-xprefetch=latx:0.1

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Peak Optimization Flags (Continued)

437.leslie3d: -m32 -fast -xtarget=sparc64xii -xpagesize=4M
 -xsegment_align=4M -xthroughput -xunroll=2 -xvector=%none
 -xprefetch=latx:0.8 -Qoption cg -Qms_pipe+alldoall
 -xinline_param=level:1 -xthroughput=no

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
 -xprofile=use:./feedback(pass 2) -m32 -fast
 -xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
 -xthroughput -xunroll=9 -xprefetch=latx:0.2
 -xprefetch_level=3 -Qoption cg -Qlp-av=128
 -Qoption iropt -Rujam

465.tonto: -xprofile=collect:./feedback(pass 1)
 -xprofile=use:./feedback(pass 2) -m32 -fast
 -xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
 -xthroughput -xipo=1 -xO4 -xunroll=3 -xprefetch=no%auto
 -xthroughput=no -lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -std=c99 -xprofile=collect:./feedback(pass 1)
 -xprofile=use:./feedback(pass 2) -m32 -fast(cc) -fast(f95)
 -xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
 -xthroughput -xalias_level=strong -Wc,-Qicache-chbab=1
 -Wc,-Qiselect-rsqrrta=2 -Wc,-Qiselect-rsqrrtalx=2
 -qoption cg -Qicache-chbab=1 -qoption cg -Qiselect-rsqrrta=2
 -qoption cg -Qiselect-rsqrrtalx=2

436.cactusADM: -std=c99 -m32 -fast(cc) -fast(f95) -xtarget=sparc64xii
 -xpagesize=4M -xsegment_align=4M -xthroughput
 -xtarget=sparc64xplus -xunroll=10 -xprefetch=latx:2.0
 -xpagesize=256M -xsegment_align=256M -xthroughput=no
 -lbsdmalloc

454.calculix: -std=c99 -xprofile=collect:./feedback(pass 1)
 -xprofile=use:./feedback(pass 2) -m32 -fast(cc) -fast(f95)
 -xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
 -xthroughput -xtarget=sparc64xplus -xipo=1
 -Wc,-Qiselect-funcalign=64 -xinline_param=level:3
 -Qoption cg -Qiselect-funcalign=64

481.wrf: -std=c99 -m32 -fast(cc) -fast(f95) -xtarget=sparc64xii
 -xpagesize=4M -xsegment_align=4M -xthroughput -xunroll=9
 -xprefetch=latx:0.4 -Qoption iropt -Rujam -xO4
 -xthroughput=no



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECfp_rate2006 = 1440

SPECfp_rate_base2006 = 1280

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Fortran benchmarks:
-xjobs=8

Benchmarks using both Fortran and C:
-xjobs=8

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-M12-2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-M12-2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Apr 20 09:42:25 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2017.