



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.50 GHz, Intel Xeon Platinum 8180)

SPECint®2006 = Not Run

SPECint_base2006 = 81.5

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

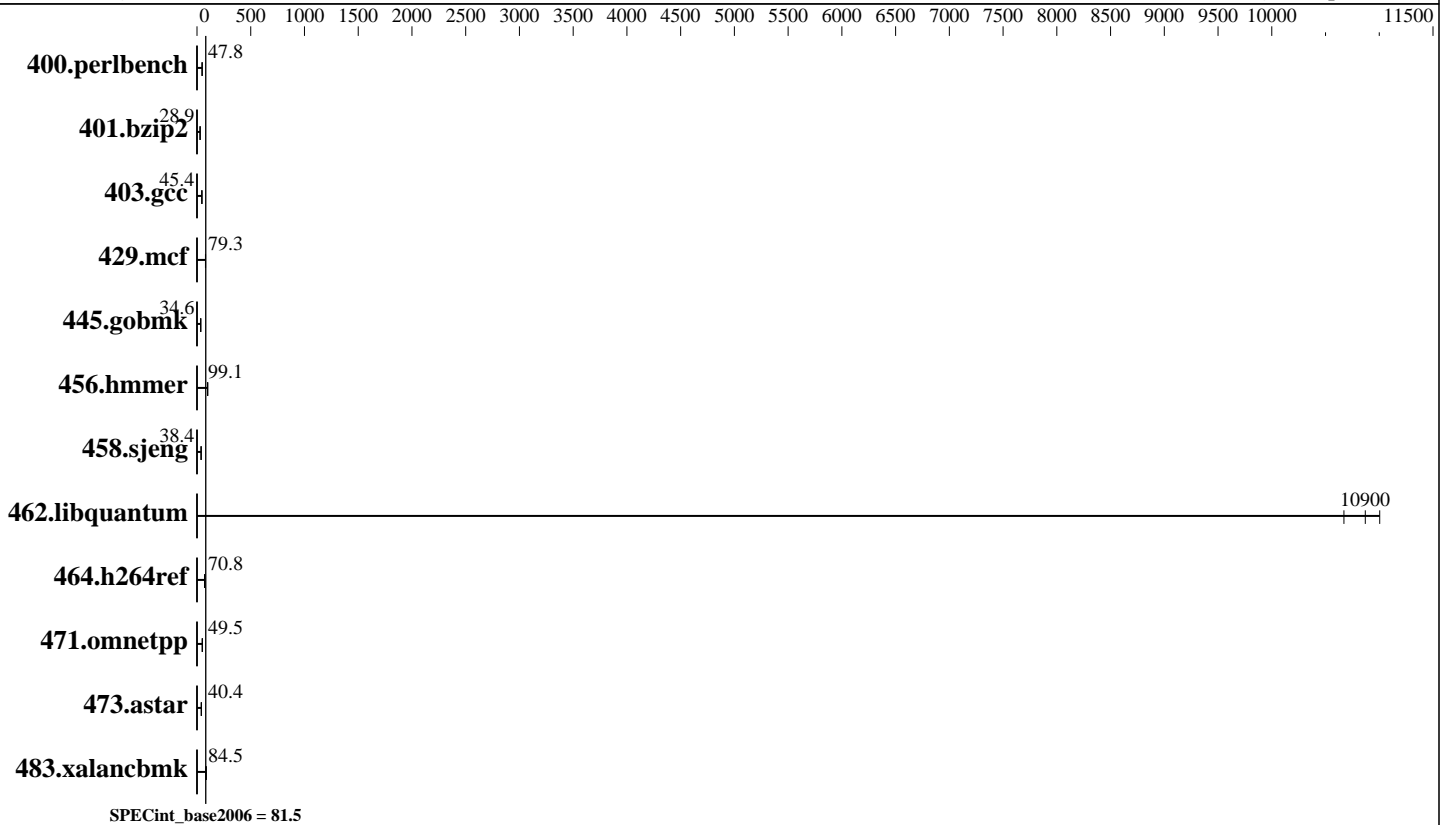

Hardware

CPU Name: Intel Xeon Platinum 8180
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 112 cores, 4 chips, 28 cores/chip
 CPU(s) orderable: 2,4 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 800 GB SATA SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECint2006 =

Not Run

SPECint_base2006 =

81.5

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	204	48.0	204	47.8	<u>204</u>	<u>47.8</u>						
401.bzip2	333	28.9	334	28.9	<u>334</u>	<u>28.9</u>						
403.gcc	177	45.5	<u>177</u>	<u>45.4</u>	178	45.3						
429.mcf	116	78.7	115	79.5	<u>115</u>	<u>79.3</u>						
445.gobmk	303	34.6	303	34.6	<u>303</u>	<u>34.6</u>						
456.hammer	<u>94.1</u>	<u>99.1</u>	94.4	98.9	93.8	99.5						
458.sjeng	315	38.4	<u>315</u>	<u>38.4</u>	315	38.4						
462.libquantum	1.94	10700	<u>1.91</u>	<u>10900</u>	1.88	11000						
464.h264ref	313	70.7	312	70.9	<u>313</u>	<u>70.8</u>						
471.omnetpp	<u>126</u>	<u>49.5</u>	127	49.2	126	49.6						
473.astar	<u>174</u>	<u>40.4</u>	174	40.3	174	40.4						
483.xalancbmk	81.6	84.6	<u>81.7</u>	<u>84.5</u>	81.7	84.4						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Enabled

Memory patrol scrubbing set to disabled

AHS PCI logging level set to Minimal logging

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Minimum Processor Idle Power Core C-state set to C1E

Workload Profile set to Custom

Uncore Frequency Scaling set to Auto

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on DL580G10 Fri Sep 15 22:49:20 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.50 GHz, Intel Xeon Platinum 8180)

SPECint2006 =

Not Run

SPECint_base2006 =

81.5

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Platform Notes (Continued)

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 4 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
  physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
  physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
cache size : 39424 KB

```

From /proc/meminfo

```

MemTotal:      792278088 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

uname -a:

```

Linux DL580G10 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 15 22:46

SPEC is set to: /home/cpu2006

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel_dl580g10-home xfs   690G   13G  677G   2% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.50 GHz, Intel Xeon Platinum 8180)

SPECint2006 = Not Run

SPECint_base2006 = 81.5

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 08/18/2017

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "91"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.50 GHz, Intel Xeon Platinum 8180)

SPECint2006 = Not Run

SPECint_base2006 = 81.5

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:39:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 5