



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.40 GHz, Intel Xeon Gold 6148)

**SPECfp<sup>®</sup>2006 = Not Run**

**SPECfp\_base2006 = 138**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

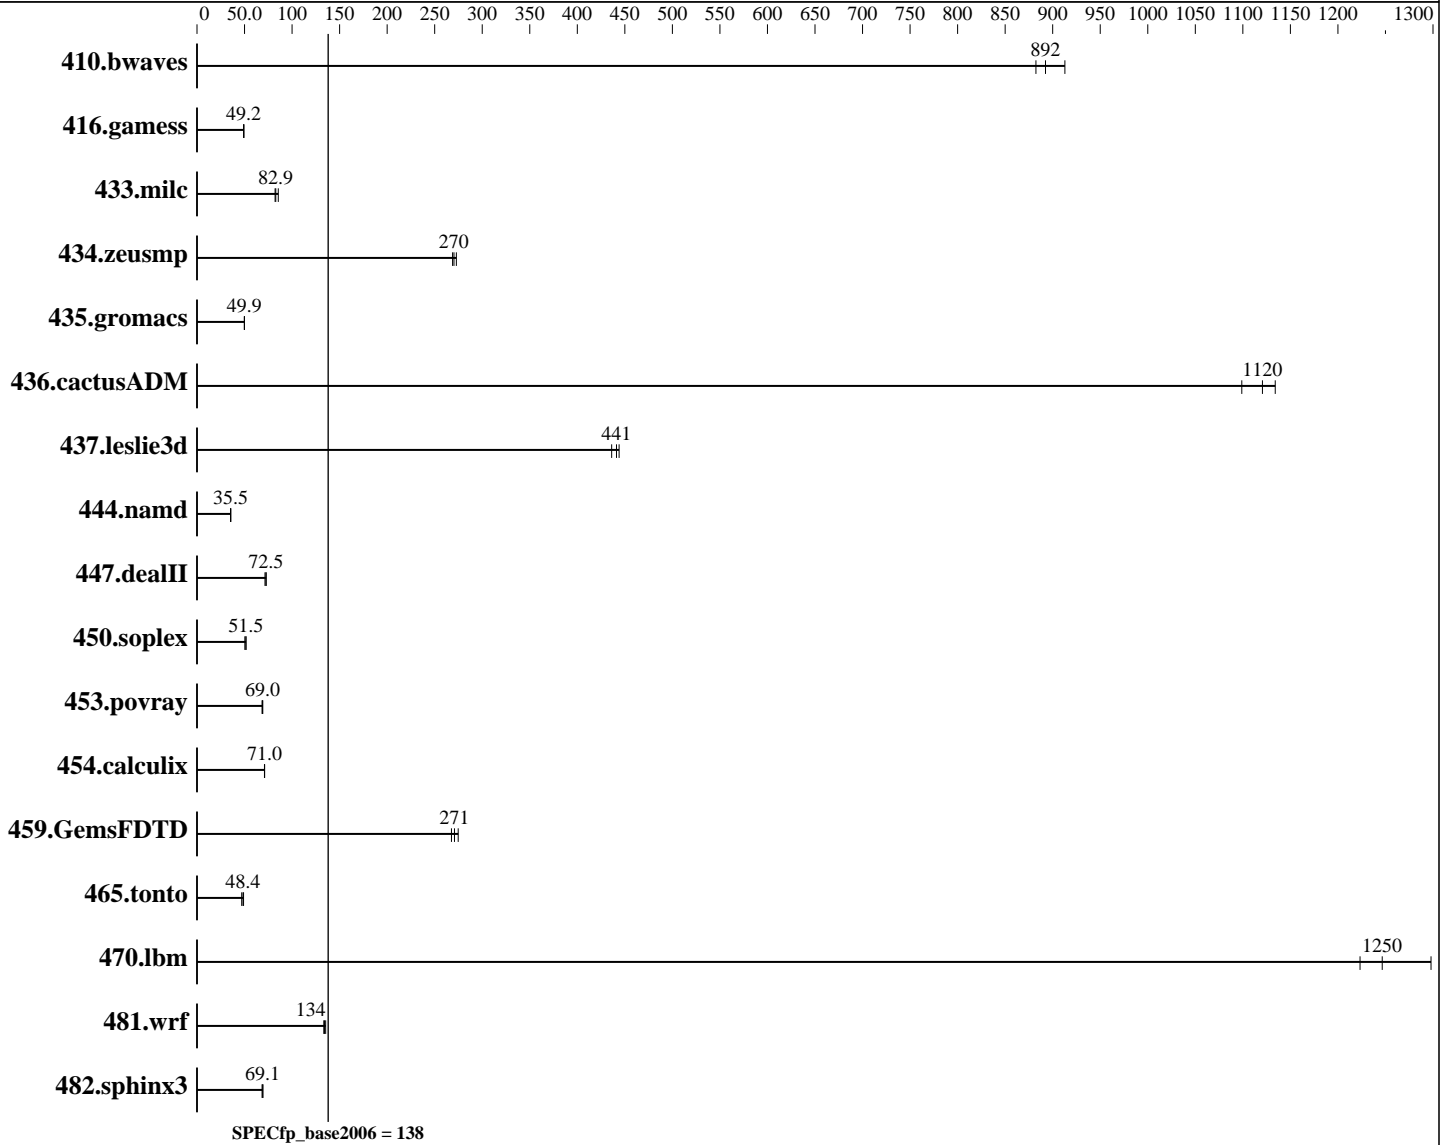

### Hardware

CPU Name: Intel Xeon Gold 6148  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Kernel 3.10.0-693.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.40 GHz, Intel Xeon Gold 6148)

SPECfp2006 = **Not Run**

SPECfp\_base2006 = **138**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

L3 Cache: 27.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 2 x 480 GB SATA SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>15.2</u></b>	<b><u>892</u></b>	15.4	882	14.9	913						
416.gamess	398	49.2	399	49.1	<b><u>398</u></b>	<b><u>49.2</u></b>						
433.milc	107	85.5	112	82.1	<b><u>111</u></b>	<b><u>82.9</u></b>						
434.zeusmp	33.9	269	<b><u>33.7</u></b>	<b><u>270</u></b>	33.4	273						
435.gromacs	<b><u>143</u></b>	<b><u>49.9</u></b>	143	49.9	143	49.8						
436.cactusADM	10.9	1100	10.5	1130	<b><u>10.7</u></b>	<b><u>1120</u></b>						
437.leslie3d	21.6	436	21.2	444	<b><u>21.3</u></b>	<b><u>441</u></b>						
444.namd	226	35.5	227	35.3	<b><u>226</u></b>	<b><u>35.5</u></b>						
447.dealII	<b><u>158</u></b>	<b><u>72.5</u></b>	160	71.5	157	72.8						
450.soplex	162	51.5	166	50.3	<b><u>162</u></b>	<b><u>51.5</u></b>						
453.povray	77.0	69.1	77.8	68.4	<b><u>77.1</u></b>	<b><u>69.0</u></b>						
454.calculix	116	71.1	<b><u>116</u></b>	<b><u>71.0</u></b>	116	71.0						
459.GemsFDTD	<b><u>39.2</u></b>	<b><u>271</u></b>	39.6	268	38.6	275						
465.tonto	<b><u>203</u></b>	<b><u>48.4</u></b>	209	47.0	201	49.0						
470.lbm	11.2	1220	10.6	1300	<b><u>11.0</u></b>	<b><u>1250</u></b>						
481.wrf	82.5	135	83.7	133	<b><u>83.3</u></b>	<b><u>134</u></b>						
482.sphinx3	281	69.3	285	68.4	<b><u>282</u></b>	<b><u>69.1</u></b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
IRQ balance service was stop using "service irqbalance stop"  
Tuned-adm profile was set to Throughput-Performance

## Platform Notes

BIOS Configuration:  
Intel Hyperthreading set to Disabled  
Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.40 GHz, Intel Xeon Gold 6148)

SPECfp2006 =

Not Run

SPECfp\_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Memory Patrol Scrubbing set to Disabled  
 Workload Profile set to General Peak Frequency Compute  
 Energy/Performance Bias set to Maximum Performance  
 Workload Profile set to Custom  
 NUMA Group Size Optimization set to Flat  
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on bl160c15 Wed Dec 6 14:34:48 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 20
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      197748184 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux bl160c15 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57 EDT 2017
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 6 12:19

SPEC is set to: /home/cpu2006

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.40 GHz, Intel Xeon Gold 6148)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**138**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	839G	27G	812G	4%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 11/14/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 192 GB and the dmidecode description should have one line reading as:

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=core,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 6148)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**138**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.40 GHz, Intel Xeon Gold 6148)

**SPECfp2006 = Not Run**

**SPECfp\_base2006 = 138**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 16 12:09:23 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 January 2018.