



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL560 Gen10  
(2.60 GHz, Intel Xeon Gold 6132)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 3130**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

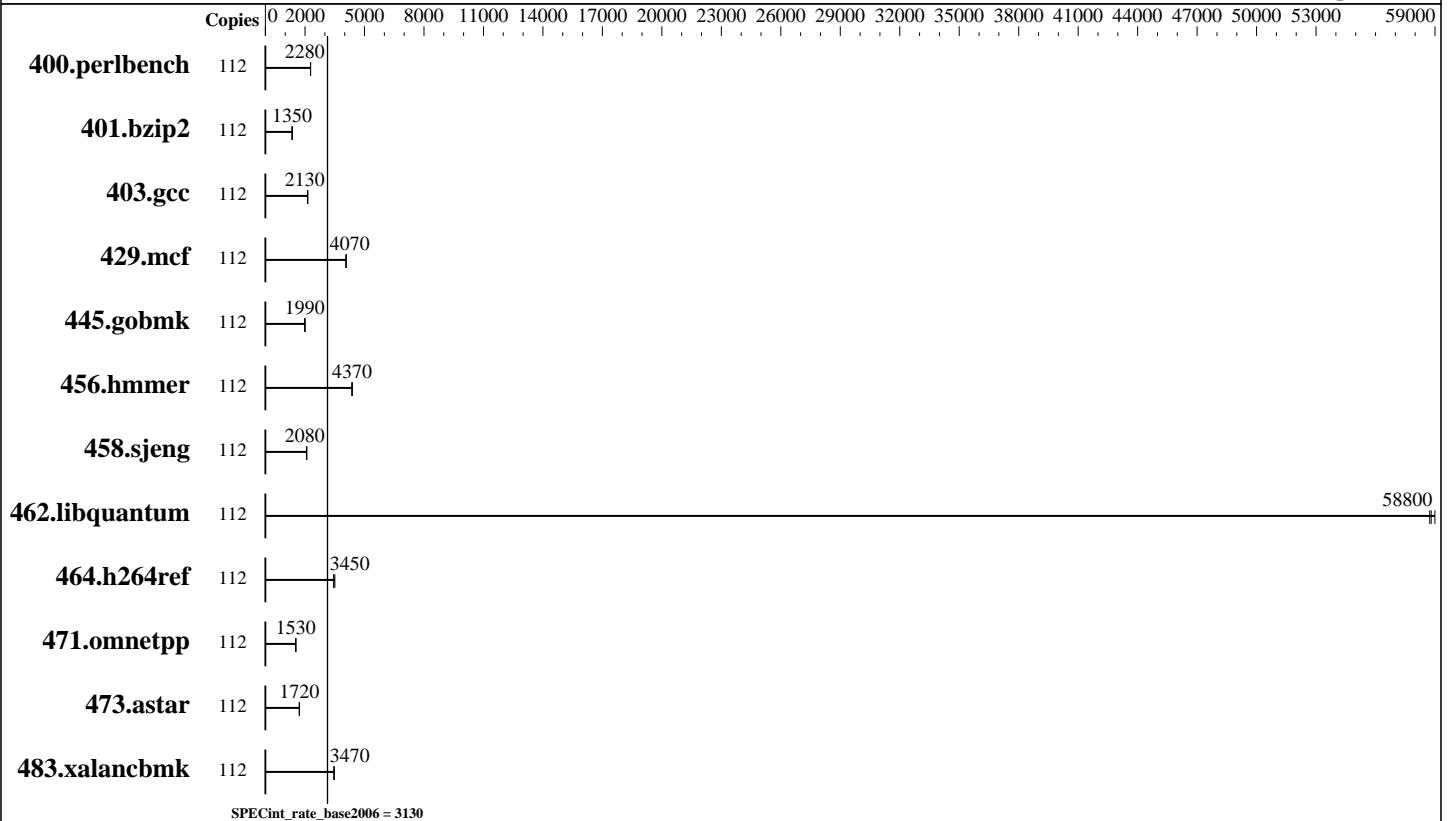

## Hardware

**CPU Name:** Intel Xeon Gold 6132  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.70 GHz  
**CPU MHz:** 2600  
**FPU:** Integrated  
**CPU(s) enabled:** 56 cores, 4 chips, 14 cores/chip, 2 threads/core  
**CPU(s) orderable:** 1, 2, 4 chip(s)  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 1 MB I+D on chip per core  
**L3 Cache:** 19.25 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 384 GB (48 x 8 GB 2Rx8 PC4-2666V-R)  
**Disk Subsystem:** 1 x 960 GB SATA SSD, RAID 0  
**Other Hardware:** None

## Software

**Operating System:** SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Kernel 4.4.21-68-default  
**Compiler:** C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux  
**Auto Parallel:** No  
**File System:** xfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** Not Applicable  
**Other Software:** Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.60 GHz, Intel Xeon Gold 6132)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 3130

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak					
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	112	480	2280	<b>480</b>	<b>2280</b>	480	2280							
401.bzip2	112	798	1350	<b>800</b>	<b>1350</b>	804	1340							
403.gcc	112	425	2120	421	2140	<b>423</b>	<b>2130</b>							
429.mcf	112	<b>251</b>	<b>4070</b>	251	4070	251	4070							
445.gobmk	112	<b>589</b>	<b>1990</b>	590	1990	587	2000							
456.hammer	112	<b>239</b>	<b>4370</b>	240	4360	238	4380							
458.sjeng	112	651	2080	<b>651</b>	<b>2080</b>	650	2080							
462.libquantum	112	<b>39.5</b>	<b>58800</b>	39.5	58700	39.3	59000							
464.h264ref	112	720	3440	707	3510	<b>719</b>	<b>3450</b>							
471.omnetpp	112	457	1530	<b>457</b>	<b>1530</b>	455	1540							
473.astar	112	<b>458</b>	<b>1720</b>	458	1720	459	1710							
483.xalancbmk	112	223	3460	223	3470	<b>223</b>	<b>3470</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

## Platform Notes

```
BIOS Configuration:
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
State A to S set to Enabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E State
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10  
(2.60 GHz, Intel Xeon Gold 6132)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 3130

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-mcua Tue Dec 5 11:23:21 2017

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
4 "physical id"s (chips)
112 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

cache size : 19712 KB

From /proc/meminfo

```
MemTotal:      395915992 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-mcua 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
(63cf368) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 5 11:18

SPEC is set to: /home/cpu2006

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10  
(2.60 GHz, Intel Xeon Gold 6132)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 3130

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xfs	852G	74G	778G	9%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 09/29/2017

Memory:

48x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2018.0.082/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018.0.082/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
 403.gcc: -D\_FILE\_OFFSET\_BITS=64  
 429.mcf: -D\_FILE\_OFFSET\_BITS=64  
 445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.60 GHz, Intel Xeon Gold 6132)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 3130

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/home/cpu2006/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 12:09:42 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5