



SPEC[®] CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECfp[®]_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECfp_rate_base2006 = 1380

CPU2006 license: 4813


Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

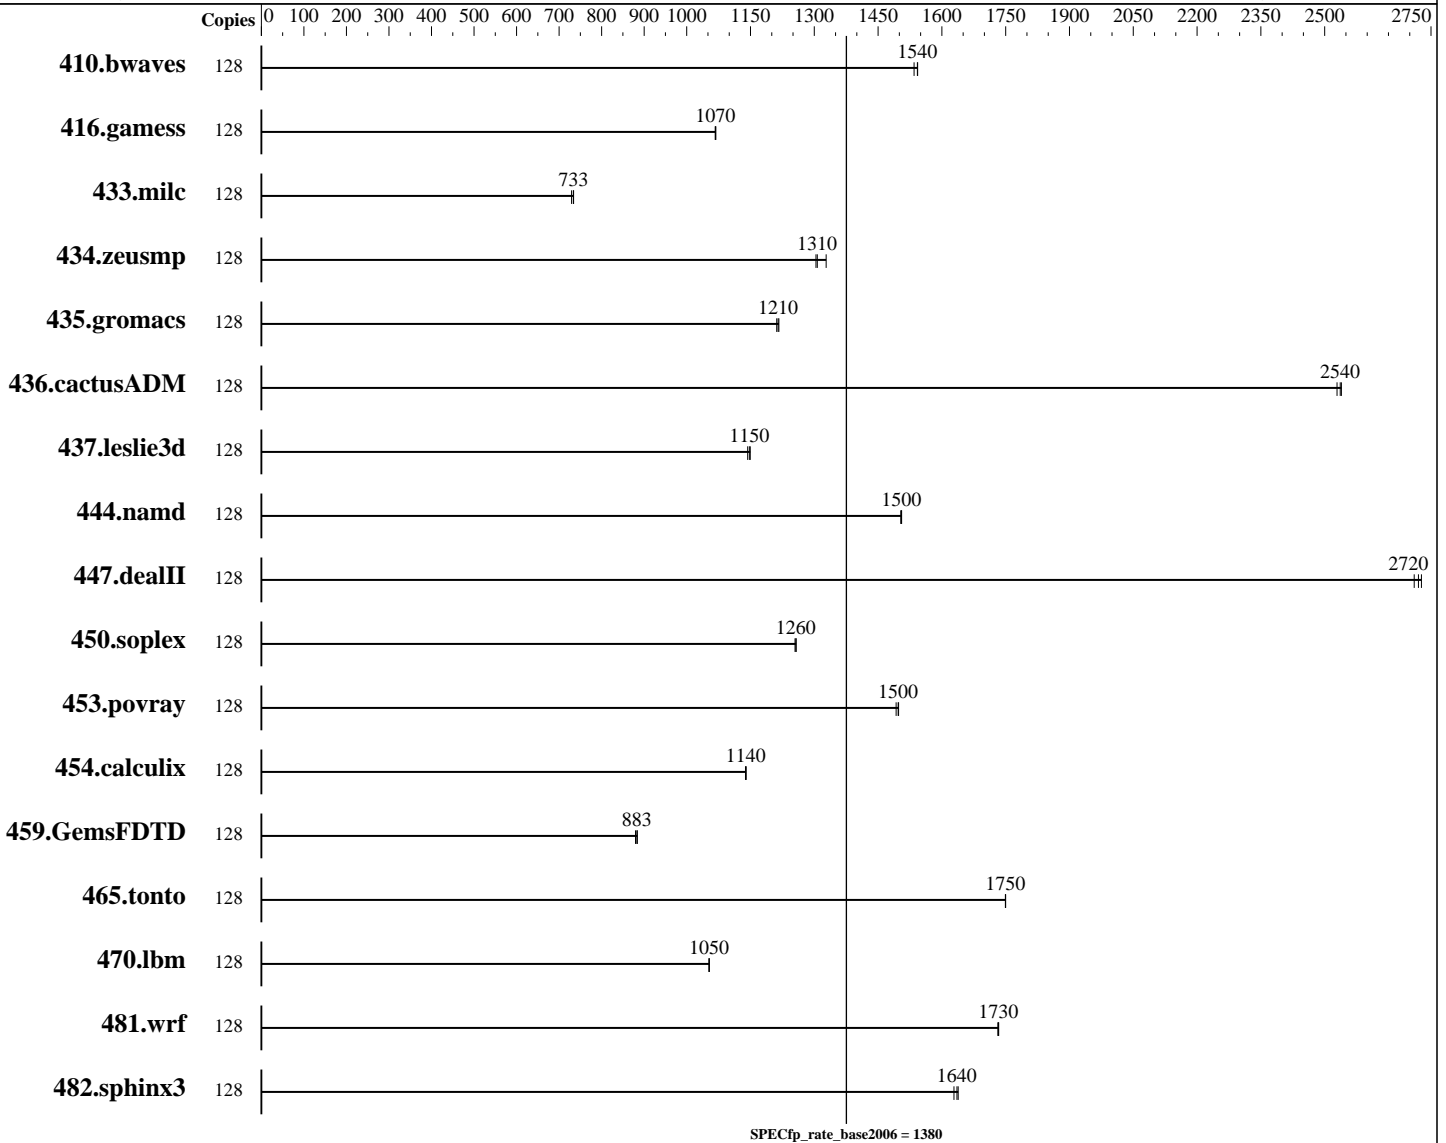

Hardware

CPU Name: IBM POWER8
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz
 CPU MHz: 3325
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 1-4 chips
 Primary Cache: 32 KB I + 64 KB D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.ppc64le
 Compiler: C/C++: Version 13.1.5 of IBM XL C/C++ for Linux
 Fortran: Version 15.1.5 of IBM XL Fortran
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECfp_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECfp_rate_base2006 = 1380

CPU2006 license: 4813

Test date: Dec-2017

Test sponsor: Yadro

Hardware Availability: Dec-2017

Tested by: Yadro

Software Availability: Dec-2016

Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per core
 Other Cache: 16 MB I+D off chip per 8 DIMMs
 Memory: 8 TB (128 x 64 GB 4Rx4 PC4 - 2400T, running at 1600)
 Disk Subsystem: 2 x 2.9 TB NVMe SSD
 Other Hardware: None

Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1128	1540	1134	1530	1127	1540							
416.gamess	128	2348	1070	2345	1070	2348	1070							
433.milc	128	1602	733	1611	729	1601	734							
434.zeusmp	128	893	1300	877	1330	891	1310							
435.gromacs	128	751	1220	754	1210	752	1210							
436.cactusADM	128	605	2530	602	2540	603	2540							
437.leslie3d	128	1049	1150	1052	1140	1047	1150							
444.namd	128	682	1510	683	1500	682	1500							
447.dealII	128	540	2710	537	2730	538	2720							
450.soplex	128	849	1260	851	1250	849	1260							
453.povray	128	456	1490	455	1500	455	1500							
454.calculix	128	927	1140	927	1140	928	1140							
459.GemsFDTD	128	1536	884	1544	880	1538	883							
465.tonto	128	720	1750	720	1750	720	1750							
470.lbm	128	1670	1050	1670	1050	1671	1050							
481.wrf	128	825	1730	826	1730	825	1730							
482.sphinx3	128	1523	1640	1532	1630	1525	1640							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "taskset" command (see flags file for details).

Operating System Notes

"ulimit -s" used to remove statck size limit.
"ppc64_cpu --smt=4" used to set SMT4 mode (see flags file for details).



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECfp_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECfp_rate_base2006 = 1380

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

Platform Notes

Sysinfo program /home/build/spec2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 # \$ 8787f7622badcf24e01c368b1db4377c
running on localhost.localdomain Fri Dec 15 10:10:50 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
clock : 3857.000000MHz
machine : PowerNV 0000000000000000
model : 0000000000000000
platform : PowerNV
revision : 2.0 (pvr 004d 0200)
cpu : POWER8 (raw), altivec supported
```

*

* 0 "physical id" tags found. Perhaps this is an older system,
* or a virtualized system. Not attempting to guess how to
* count chips/cores for this system.

*

128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

From /proc/meminfo

```
MemTotal: 8569843072 kB
HugePages_Total: 16000
Hugepagesize: 16384 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-327.el7.ppc64le #1 SMP Thu Oct 29 17:31:13
EDT 2015 ppc64le ppc64le ppc64le GNU/Linux
```

run-level 3 Jan 1 03:13

SPEC is set to: /home/build/spec2006

```
Filesystem Type Size Used Avail Use% Mounted on
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECfp_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECfp_rate_base2006 = 1380

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

Platform Notes (Continued)

/dev/mapper/rhel-home xfs 2.9T 528G 2.4T 19% /home

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

XLFRTEOPTS = "intrinths=1"

Binaries were compiled on a system with 4x POWER8 chips + 4 TB Memory using rhel 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Base Compiler Invocation

C benchmarks:

/opt/ibm/xlC/13.1.5/bin/xlc_r -qlanglvl=extc99

C++ benchmarks:

/opt/ibm/xlC/13.1.5/bin/xlc_r

Fortran benchmarks:

/opt/ibm/xlf/15.1.5/bin/xlf95_r

Benchmarks using both Fortran and C:

/opt/ibm/xlC/13.1.5/bin/xlc_r -qlanglvl=extc99

/opt/ibm/xlf/15.1.5/bin/xlf95_r

Base Portability Flags

410.bwaves: -qfixed

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 4



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECfp_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECfp_rate_base2006 = 1380

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

Base Portability Flags (Continued)

```

416.gamess: -qfixed -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -qfixed -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -qfixed -qextname
436.cactusADM: -DSPEC_CPU_LP64 -qfixed -qextname
437.leslie3d: -qfixed
444.namd: -qnoxlcompatmacros(*) -DSPEC_CPU_LP64
447.dealII: -qnoxlcompatmacros(*) -DSPEC_CPU_LP64
450.soplex: -qnoxlcompatmacros(*) -DSPEC_CPU_LP64
453.povray: -qnoxlcompatmacros(*) -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -qfixed -qextname
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DNOUNDERSCORE -DSPEC_CPU_LINUX
          -DSPEC_CPU_WORDS_LITTLEENDIAN -DSPEC_CPU_LP64
482.sphinx3: -qchars=signed -DSPEC_CPU_LP64

```

(*) Indicates a portability flag that was found in a non-portability variable.

Base Optimization Flags

C benchmarks:

-qipa=threads -q64 -O5 -qinline=40 -qsimd=noauto

C++ benchmarks:

-qipa=threads -q64 -O5 -qsimd -qrtti=all -qinline=40 -qrtti
-D__extern_always_inline=inline

Fortran benchmarks:

-qipa=threads -q64 -O5 -qalias=nostd

Benchmarks using both Fortran and C:

-qipa=threads -q64 -O5 -qinline=40 -qsimd=noauto -qalias=nostd

Base Other Flags

C benchmarks:

-qipa=noobject

C++ benchmarks:

-qipa=noobject

Fortran benchmarks:

-qipa=noobject

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECfp_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECfp_rate_base2006 = 1380

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-qipa=noobject

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/vesnin_xl-V1.1.html

http://www.spec.org/cpu2006/flags/vesnin_platform-V1.1.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/vesnin_xl-V1.1.xml

http://www.spec.org/cpu2006/flags/vesnin_platform-V1.1.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Mar 9 10:42:50 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 March 2018.