



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_base = 922

SPECrate2017_int_peak = 971

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

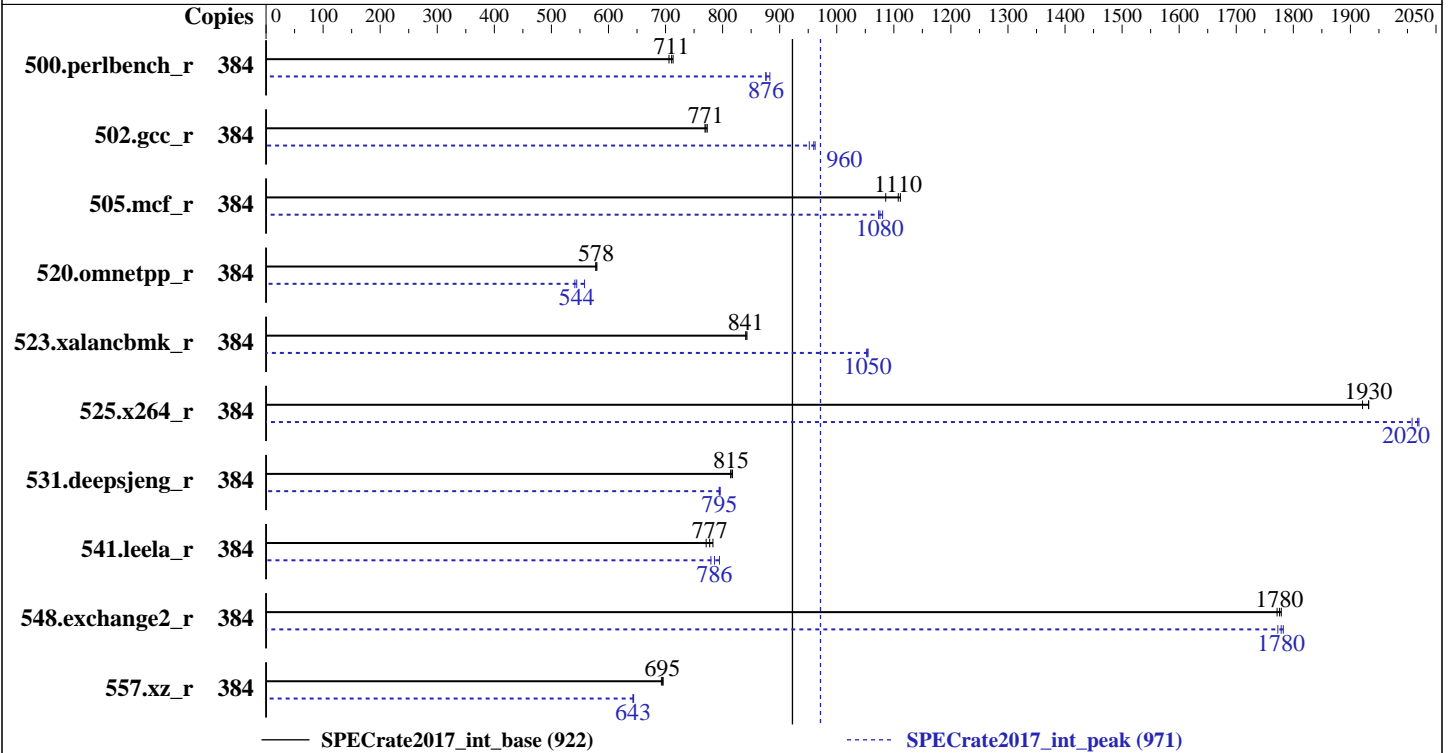

Hardware

CPU Name: Intel Xeon Platinum 8160T
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 192 cores, 8 chips, 2 threads/core
 Orderable: 2,4,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 800 GB tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version PSE105X 1.00 released Aug-2017
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library
 V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	860	711	857	713	866	706	384	692	883	698	876	698	876
502.gcc_r	384	707	769	705	771	703	773	384	567	960	571	952	565	962
505.mcf_r	384	558	1110	560	1110	572	1090	384	574	1080	578	1070	577	1080
520.omnetpp_r	384	871	578	869	580	872	578	384	903	558	931	541	925	544
523.xalancbmk_r	384	482	841	482	841	481	843	384	385	1050	385	1050	385	1050
525.x264_r	384	350	1920	348	1930	348	1930	384	335	2010	333	2020	333	2020
531.deepsjeng_r	384	538	817	541	814	540	815	384	553	796	554	795	554	794
541.leela_r	384	818	777	812	783	825	771	384	816	779	809	786	800	794
548.exchange2_r	384	566	1780	568	1770	567	1780	384	568	1770	566	1780	564	1780
557.xz_r	384	596	696	597	695	599	693	384	644	643	645	643	644	644

SPECrate2017_int_base = 922

SPECrate2017_int_peak = 971

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

DCU Streamer Prefetcher set to Disable

MONITORM/WAIT set to Enable

Execute Disable Bit set to Disable

Trusted Execution Technology set to Enable

Per Core Pstate set to Disable

XPT Prefetcher set to Enable

Stale AtoS set to Enable

LLC Deadline Alloc set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-boxi Tue Jan 16 21:08:07 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160T CPU @ 2.10GHz

8 "physical id"s (chips)

384 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

```

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 384
On-line CPU(s) list:   0-383
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              8
NUMA node(s):          16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8160T CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2095.072
BogoMIPS:               4190.14
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               33792K
NUMA node0 CPU(s):     0-2,6-8,12-14,18-20,192-194,198-200,204-206,210-212
NUMA node1 CPU(s):     3-5,9-11,15-17,21-23,195-197,201-203,207-209,213-215
NUMA node2 CPU(s):     24-26,30-32,36-38,42-44,216-218,222-224,228-230,234-236
NUMA node3 CPU(s):     27-29,33-35,39-41,45-47,219-221,225-227,231-233,237-239
NUMA node4 CPU(s):     48-50,54-56,60-62,66-68,240-242,246-248,252-254,258-260
NUMA node5 CPU(s):     51-53,57-59,63-65,69-71,243-245,249-251,255-257,261-263

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```

NUMA node6 CPU(s):      72-74,78-80,84-86,90-92,264-266,270-272,276-278,282-284
NUMA node7 CPU(s):      75-77,81-83,87-89,93-95,267-269,273-275,279-281,285-287
NUMA node8 CPU(s):      96-98,102-104,108-110,114-116,288-290,294-296,300-302,306-308
NUMA node9 CPU(s):
99-101,105-107,111-113,117-119,291-293,297-299,303-305,309-311
NUMA node10 CPU(s):
120-122,126-128,132-134,138-140,312-314,318-320,324-326,330-332
NUMA node11 CPU(s):
123-125,129-131,135-137,141-143,315-317,321-323,327-329,333-335
NUMA node12 CPU(s):
144-146,150-152,156-158,162-164,336-338,342-344,348-350,354-356
NUMA node13 CPU(s):
147-149,153-155,159-161,165-167,339-341,345-347,351-353,357-359
NUMA node14 CPU(s):
168-170,174-176,180-182,186-188,360-362,366-368,372-374,378-380
NUMA node15 CPU(s):
171-173,177-179,183-185,189-191,363-365,369-371,375-377,381-383
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 192 193 194 198 199 200 204 205 206 210 211
212
node 0 size: 192984 MB
node 0 free: 192401 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 195 196 197 201 202 203 207 208 209 213
214 215
node 1 size: 193528 MB
node 1 free: 192766 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 216 217 218 222 223 224 228 229 230
234 235 236
node 2 size: 193528 MB
node 2 free: 192993 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 219 220 221 225 226 227 231 232 233
237 238 239

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```

node 3 size: 193528 MB
node 3 free: 188029 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 240 241 242 246 247 248 252 253 254
258 259 260
node 4 size: 193528 MB
node 4 free: 193019 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 243 244 245 249 250 251 255 256 257
261 262 263
node 5 size: 193528 MB
node 5 free: 184558 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 264 265 266 270 271 272 276 277 278
282 283 284
node 6 size: 193528 MB
node 6 free: 193022 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 267 268 269 273 274 275 279 280 281
285 286 287
node 7 size: 193528 MB
node 7 free: 192954 MB
node 8 cpus: 96 97 98 102 103 104 108 109 110 114 115 116 288 289 290 294 295 296 300
301 302 306 307 308
node 8 size: 193528 MB
node 8 free: 193027 MB
node 9 cpus: 99 100 101 105 106 107 111 112 113 117 118 119 291 292 293 297 298 299 303
304 305 309 310 311
node 9 size: 193528 MB
node 9 free: 192982 MB
node 10 cpus: 120 121 122 126 127 128 132 133 134 138 139 140 312 313 314 318 319 320
324 325 326 330 331 332
node 10 size: 193528 MB
node 10 free: 192996 MB
node 11 cpus: 123 124 125 129 130 131 135 136 137 141 142 143 315 316 317 321 322 323
327 328 329 333 334 335
node 11 size: 193528 MB
node 11 free: 193030 MB
node 12 cpus: 144 145 146 150 151 152 156 157 158 162 163 164 336 337 338 342 343 344
348 349 350 354 355 356
node 12 size: 193528 MB
node 12 free: 193025 MB
node 13 cpus: 147 148 149 153 154 155 159 160 161 165 166 167 339 340 341 345 346 347
351 352 353 357 358 359
node 13 size: 193528 MB
node 13 free: 192880 MB
node 14 cpus: 168 169 170 174 175 176 180 181 182 186 187 188 360 361 362 366 367 368
372 373 374 378 379 380
node 14 size: 193528 MB
node 14 free: 193027 MB
node 15 cpus: 171 172 173 177 178 179 183 184 185 189 190 191 363 364 365 369 370 371

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

375 376 377 381 382 383

node 15 size: 193523 MB

node 15 free: 193025 MB

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
1:	20	10	20	20	20	20	20	20	20	20	20	20	20	20	20	20
2:	20	20	10	20	20	20	20	20	20	20	20	20	20	20	20	20
3:	20	20	20	10	20	20	20	20	20	20	20	20	20	20	20	20
4:	20	20	20	20	10	20	20	20	20	20	20	20	20	20	20	20
5:	20	20	20	20	20	10	20	20	20	20	20	20	20	20	20	20
6:	20	20	20	20	20	20	10	20	20	20	20	20	20	20	20	20
7:	20	20	20	20	20	20	20	10	20	20	20	20	20	20	20	20
8:	20	20	20	20	20	20	20	20	10	20	20	20	20	20	20	20
9:	20	20	20	20	20	20	20	20	20	10	20	20	20	20	20	20
10:	20	20	20	20	20	20	20	20	20	20	10	20	20	20	20	20
11:	20	20	20	20	20	20	20	20	20	20	20	10	20	20	20	20
12:	20	20	20	20	20	20	20	20	20	20	20	20	10	20	20	20
13:	20	20	20	20	20	20	20	20	20	20	20	20	20	10	20	20
14:	20	20	20	20	20	20	20	20	20	20	20	20	20	20	10	20
15:	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	10

From /proc/meminfo

MemTotal: 3170207908 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-boxi 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)

x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_base = 922

SPECrate2017_int_peak = 971

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Platform Notes (Continued)

run-level 3 Jan 16 21:06

SPEC is set to: /home/cpu2017.1.0.2.icl8.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 800G 11G 790G 2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE105X-1.00]- 08/17/2017
Memory:
96x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_base = 922

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 922

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Date: Jan-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Peak Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_int_base = 922

SPECrate2017_int_peak = 971

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

```
502.gcc_r: -m32 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

```
523.xalancbmk_r: -m32
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-01-16 08:08:06-0500.

Report generated on 2018-10-31 16:47:35 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.