



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813


Test Sponsor: Yadro

Tested by: Yadro

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

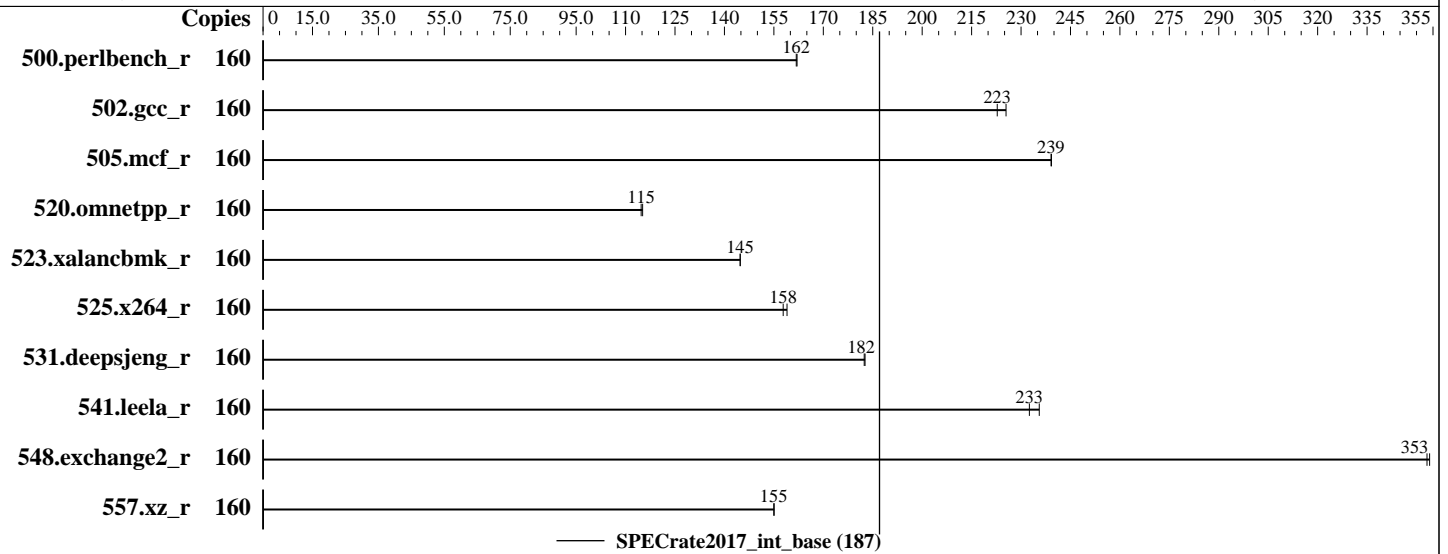

Hardware

CPU Name: IBM POWER8
 Max MHz.: 3491
 Nominal: 2926
 Enabled: 40 cores, 4 chips, 4 threads/core
 Orderable: 1-4 chips
 Cache L1: 32 KB I + 64 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 8 MB I+D on chip per core
 Other: 16 MB I+D off chip per 8 DIMMs
 Memory: 4 TB (128 x 32 GB 2Rx4 PC4 - 2400T, running at 1600)
 Storage: 1 x 7.3 TB 7200 RPM SATA
 Other: None

Software

OS: RHEL 7.4
 Red Hat Enterprise Linux Server release 7.4 (Maipo)
 3.10.0-693.el7.ppc64le
 Compiler: C/C++: Version 13.1.5 of IBM XL C/C++;
 Fortran: Version 15.1.5 of IBM XL Fortran
 Parallel: No
 Firmware: Version 1.19 of OpenPOWER Firmware. Released Nov-2017.
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	<u>1574</u>	<u>162</u>	1572	162									
502.gcc_r	160	<u>1017</u>	<u>223</u>	1005	225									
505.mcf_r	160	1081	239	<u>1081</u>	<u>239</u>									
520.omnetpp_r	160	<u>1830</u>	<u>115</u>	1823	115									
523.xalancbmk_r	160	1167	145	<u>1167</u>	<u>145</u>									
525.x264_r	160	1762	159	<u>1775</u>	<u>158</u>									
531.deepsjeng_r	160	<u>1005</u>	<u>182</u>	1004	183									
541.leela_r	160	<u>1139</u>	<u>233</u>	1125	236									
548.exchange2_r	160	<u>1187</u>	<u>353</u>	1184	354									
557.xz_r	160	1114	155	<u>1115</u>	<u>155</u>									

SPECrate2017_int_base = 187

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

"ppc64_cpu --smt=4" used to set SMT4 mode (see flags file for details).

Binaries were compiled on a system with 4x POWER8 chips + 4 TB Memory using rhel 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

Sysinfo program /root/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Fri Dec 22 03:26:24 2017

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
'clock : ' reported by /proc/cpuinfo may not be reliable. Use with caution.
cpu : POWER8 (raw), altivec supported
clock : 3491.000000MHz
machine : PowerNV 00000000000000000000
model : 00000000000000000000
platform : PowerNV
revision : 2.0 (pvr 004d 0200)
```

Number of cores, from 'ppc64_cpu --cores-present' : 40

WARNING regarding the output of 'lscfg': this utility reports resources for the system, not the current partition. Therefore, for a partition that has a subset of the full system resources:

- (1) The tester may need to adjust the sysinfo-supplied 'hw_ncores'.
- (2) The tester may need to adjust the sysinfo-supplied 'hw_nchips'.

```
Processors, from lscfg -vp
Node: processor@18
Node: processor@10
Node: processor@8
Node: processor@0
160 "processors"
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0,8,16,24)
node 0 cpus: 0 1 2 3 8 9 10 11 16 17 18 19 24 25 26 27 32 33 34 35 40 41 42 43 48 49 50
51 56 57 58 59 64 65 66 67 72 73 74 75
node 0 size: 1048576 MB
node 0 free: 972870 MB
node 8 cpus: 80 81 82 83 88 89 90 91 96 97 98 99 104 105 106 107 112 113 114 115 120
121 122 123 128 129 130 131 136 137 138 139 144 145 146 147 152 153 154 155
node 8 size: 1048576 MB
node 8 free: 974728 MB
node 16 cpus: 160 161 162 163 168 169 170 171 176 177 178 179 184 185 186 187 192 193
194 195 200 201 202 203 208 209 210 211 216 217 218 219 224 225 226 227 232 233 234 235
node 16 size: 1048576 MB
node 16 free: 977429 MB
node 24 cpus: 240 241 242 243 248 249 250 251 256 257 258 259 264 265 266 267 272 273
274 275 280 281 282 283 288 289 290 291 296 297 298 299 304 305 306 307 312 313 314 315
node 24 size: 1048576 MB
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Platform Notes (Continued)

```

node 24 free: 971914 MB
node distances:
node  0  8 16 24
  0:  10 40 40 40
  8:  40 10 40 40
 16:  40 40 10 40
 24:  40 40 40 10

From /proc/meminfo
MemTotal:          4282726848 kB
HugePages_Total:   16000
Hugepagesize:      16384 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-693.el7.ppc64le #1 SMP Thu Jul 6 19:59:44 EDT 2017
ppc64le ppc64le ppc64le GNU/Linux

run-level 3 2017-12-22 03:03

SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   110G   31G   79G  29% /

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====

```

IBM XL C/C++ for Linux, V13.1.5 (Community Edition)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Compiler Version Notes (Continued)

Version: 13.01.0005.0001
 Driver Version: 13.1.5(C/C++) Level: 161202 ID: _FJC-kLh6EeabvOJ9E16jqw
 C/C++ Front End Version: 13.1.5(C/C++) Level: 161129 ID:
 _XU1JoJsoEeabgOJ9E16jqw
 High-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161201
 ID: _LqhNgLg4EeabvOJ9E16jqw
 Low-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161129
 ID: _dlqc0afDEeabg-J9E16jqw
 /opt/ibm/xlC/13.1.5/bin/.orig/xlc: note: XL C/C++ Community Edition is a
 no-charge product and does not include official IBM support. You can
 provide feedback at the XL on POWER C/C++ Community Edition forum
 (<http://ibm.biz/xlcpp-linux-ce>). For information about a fully supported XL
 C/C++ compiler, visit XL C/C++ for Linux (<http://ibm.biz/xlcpp-linux>).

=====
 CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
 557.xz_r(base)

 IBM XL C/C++ for Linux, V13.1.5 (Community Edition)
 Version: 13.01.0005.0001
 Driver Version: 13.1.5(C/C++) Level: 161202 ID: _FJC-kLh6EeabvOJ9E16jqw
 C/C++ Front End Version: 13.1.5(C/C++) Level: 161129 ID:
 _XU1JoJsoEeabgOJ9E16jqw
 High-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161201
 ID: _LqhNgLg4EeabvOJ9E16jqw
 Low-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161129
 ID: _dlqc0afDEeabg-J9E16jqw
 /opt/ibm/xlC/13.1.5/bin/.orig/xlc: note: XL C/C++ Community Edition is a
 no-charge product and does not include official IBM support. You can
 provide feedback at the XL on POWER C/C++ Community Edition forum
 (<http://ibm.biz/xlcpp-linux-ce>). For information about a fully supported XL
 C/C++ compiler, visit XL C/C++ for Linux (<http://ibm.biz/xlcpp-linux>).

=====
 FC 548.exchange2_r(base)

 IBM XL Fortran for Linux, V15.1.5 (Community Edition)
 Version: 15.01.0005.0001
 Driver Version: 15.1.5(Fortran) Level: 161202 ID: _FJC-kLh6EeabvOJ9E16jqw
 Fortran Front End and Run Time Version: 15.1.5(Fortran) Level: 161202 ID:
 _i9fBcbirEeabvOJ9E16jqw
 Fortran Transformer Version: 15.1.5(Fortran) Level: 161129 ID:
 _dYoGZafDEeabg-J9E16jqw
 High-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161201
 ID: _LqhNgLg4EeabvOJ9E16jqw

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Compiler Version Notes (Continued)

Low-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161129
ID: _dlqc0afDEeabg-J9E16jqw
/opt/ibm/xlf/15.1.5/bin/.orig/xlf95: 1501-303 (I) XL Fortran Community Edition is a no-charge product and does not include official IBM support. You can provide feedback at the XL on POWER Fortran Community Edition forum (<http://ibm.biz/xlfortran-linux-ce>). For information about a fully supported XL Fortran compiler, visit XL Fortran for Linux (<http://ibm.biz/xlfortran-linux>).

Base Compiler Invocation

C benchmarks:
/opt/ibm/xlC/13.1.5/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/opt/ibm/xlC/13.1.5/bin/xlC

Fortran benchmarks:
/opt/ibm/xlf/15.1.5/bin/xlf95

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_PPC_LE -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -O5 -q64 -qinline=40 -qipa=threads -qsimd=noauto
-qalias=noansi

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

SPECrate2017_int_base = 187

Yadro Vesnin (2.92 GHz, 40 cores, RHEL 7.4)

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813

Test Sponsor: Yadro

Tested by: Yadro

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

Base Optimization Flags (Continued)

C++ benchmarks:

-O5 -q64 -qinline=40 -qipa=threads -qsimd=noauto

Fortran benchmarks:

-O5 -q64 -qinline=40 -qipa=threads -qsimd=noauto

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/vesnin_xl-V1.2.html

http://www.spec.org/cpu2017/flags/vesnin_platform-V1.3.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/vesnin_xl-V1.2.xml

http://www.spec.org/cpu2017/flags/vesnin_platform-V1.3.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.1 on 2017-12-21 19:26:23-0500.

Report generated on 2018-10-31 17:14:06 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-08.