



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation


SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Apr-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

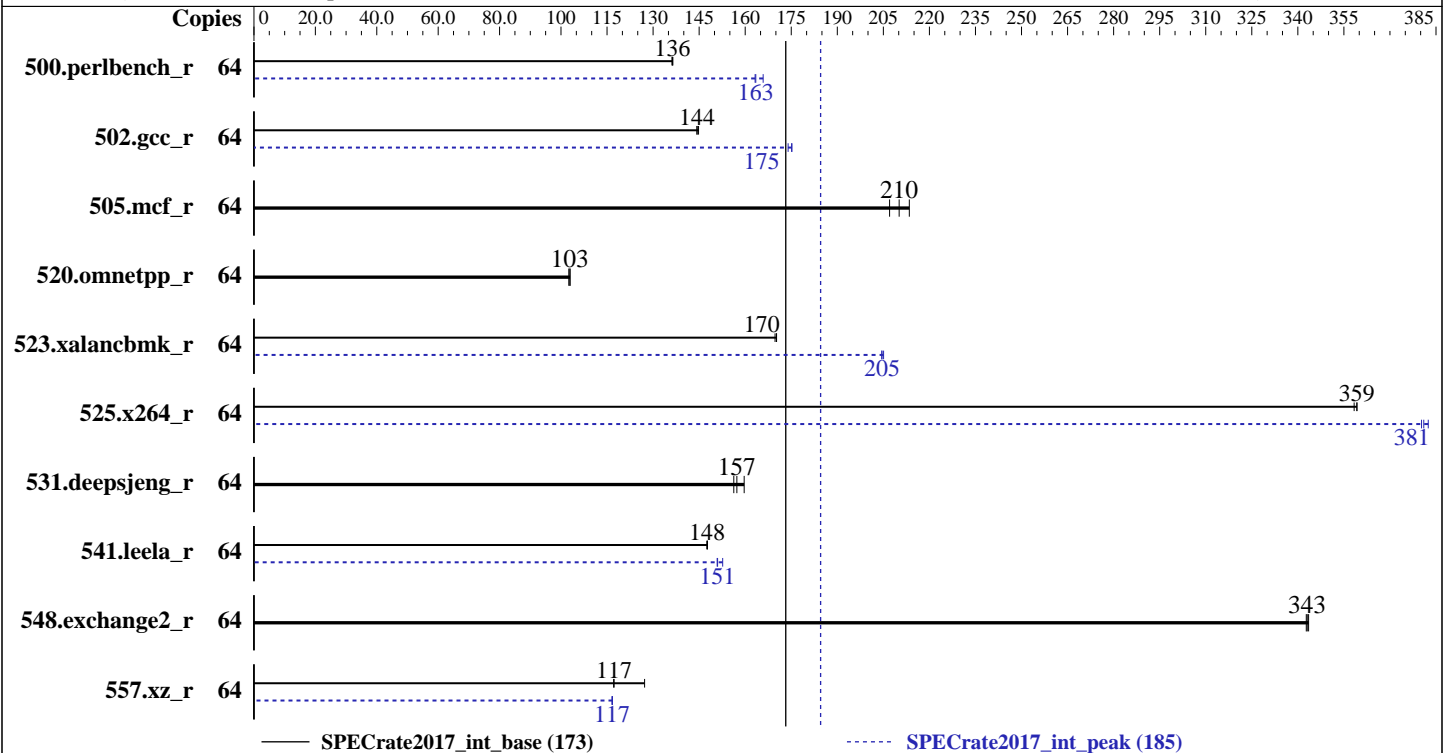

Hardware

CPU Name: Intel Xeon Gold 6142
Max MHz.: 3700
Nominal: 2600
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 22 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 1 TB SATA, 7200 RPM
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
Kernel 3.10.0-693.21.1.el7.x86_64
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version F21 02/22/2018 released Apr-2018
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Apr-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	747	136	<u>747</u>	<u>136</u>	748	136	64	614	166	<u>623</u>	<u>163</u>	624	163
502.gcc_r	64	626	145	<u>628</u>	<u>144</u>	628	144	64	<u>517</u>	<u>175</u>	521	174	517	175
505.mcf_r	64	485	213	<u>492</u>	<u>210</u>	500	207	64	485	213	<u>492</u>	<u>210</u>	500	207
520.omnetpp_r	64	816	103	819	103	<u>816</u>	<u>103</u>	64	816	103	819	103	<u>816</u>	<u>103</u>
523.xalancbmk_r	64	<u>397</u>	<u>170</u>	397	170	398	170	64	331	204	<u>330</u>	<u>205</u>	330	205
525.x264_r	64	<u>312</u>	<u>359</u>	312	359	313	358	64	<u>294</u>	<u>381</u>	293	382	295	380
531.deepsjeng_r	64	459	160	<u>466</u>	<u>157</u>	469	156	64	459	160	<u>466</u>	<u>157</u>	469	156
541.leela_r	64	717	148	<u>718</u>	<u>148</u>	718	148	64	<u>702</u>	<u>151</u>	702	151	694	153
548.exchange2_r	64	489	343	<u>489</u>	<u>343</u>	488	344	64	489	343	<u>489</u>	<u>343</u>	488	344
557.xz_r	64	543	127	<u>589</u>	<u>117</u>	590	117	64	592	117	<u>592</u>	<u>117</u>	593	117

SPECrate2017_int_base = 173

SPECrate2017_int_peak = 185

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Apr-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

ENERGY_PERF_BIAS_CFG mode: Performance
SNC: Enable
IMC Interleaving: 1-way Interleave
Stale AtoS: Enable
LLC dead line alloc: Disable
Patrol Scrub: Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on d120h Thu Apr 12 21:15:17 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings  : 32
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
NUMA node(s):         4
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Apr-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
Stepping:           4
CPU MHz:            1945.632
CPU max MHz:        3700.0000
CPU min MHz:        1000.0000
BogoMIPS:           5200.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           22528K
NUMA node0 CPU(s): 0-3,8-11,32-35,40-43
NUMA node1 CPU(s): 4-7,12-15,36-39,44-47
NUMA node2 CPU(s): 16-19,24-27,48-51,56-59
NUMA node3 CPU(s): 20-23,28-31,52-55,60-63
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43
node 0 size: 96932 MB
node 0 free: 94099 MB
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47
node 1 size: 98304 MB
node 1 free: 95999 MB
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59
node 2 size: 98304 MB
node 2 free: 95983 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 98304 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Apr-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```
node 3 free: 95976 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10
```

```
From /proc/meminfo
MemTotal:      394643728 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux dl20h 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 12 21:09
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  909G  275G  588G  32% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS GIGABYTE F21 02/22/2018
Memory:
4x NO DIMM NO DIMM
1x SK Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
11x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Apr-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Apr-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Apr-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-fno-strict-overflow -L/usr/local/je5.0.1-64/lib

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Apr-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -fno-alias

-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib

-ljemalloc

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 173

Express5800/D120h (Intel Xeon Gold 6142)

SPECrate2017_int_peak = 185

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Apr-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-12 08:15:16-0400.

Report generated on 2018-10-31 17:17:43 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.