



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10


(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

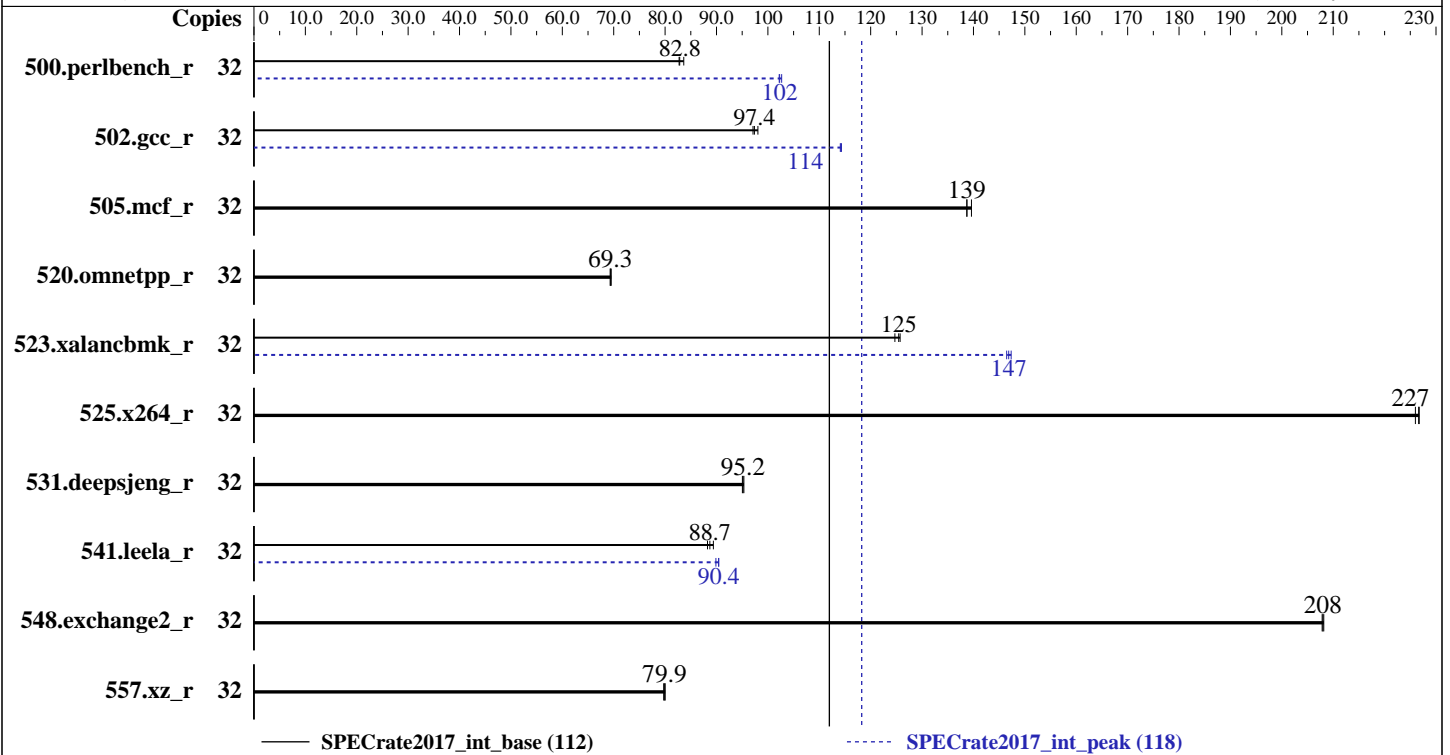

Hardware

CPU Name: Intel Xeon Gold 5122
 Max MHz.: 3700
 Nominal: 3600
 Enabled: 16 cores, 4 chips, 2 threads/core
 Orderable: 1, 2, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (48 x 8 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 960 GB SATA SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Tested with kernel 4.4.131-94.25-default
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version U34 06/20/2018 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	615	82.8	609	83.6	616	82.7	32	498	102	496	103	498	102
502.gcc_r	32	467	97.1	462	98.1	465	97.4	32	396	114	397	114	397	114
505.mcf_r	32	373	139	373	139	370	140	32	373	139	373	139	370	140
520.omnetpp_r	32	605	69.3	604	69.5	606	69.3	32	605	69.3	604	69.5	606	69.3
523.xalancbmk_r	32	269	125	269	126	271	125	32	230	147	229	147	231	146
525.x264_r	32	248	226	247	227	247	227	32	248	226	247	227	247	227
531.deepsjeng_r	32	385	95.2	386	95.0	385	95.3	32	385	95.2	386	95.0	385	95.3
541.leela_r	32	597	88.7	600	88.3	593	89.4	32	586	90.4	586	90.4	590	89.9
548.exchange2_r	32	403	208	403	208	403	208	32	403	208	403	208	403	208
557.xz_r	32	432	80.0	434	79.7	433	79.9	32	432	80.0	434	79.7	433	79.9

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
Numa Balancing disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
```

The result, as tested, used kernel 4.4.131-94.25-default of SLES12 SP3. This is a pre-production kernel which should be representative of the production kernel 4.4.131-94.29.1 for SLES12 SP3.

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

General Notes (Continued)

memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute
Memory Patrol Scrubbing set to Disabled
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Disabled
Minimum Processor Idle Power Core C-State set to ClE State
Thermal Configuration set to Maximum Cooling
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-hefb Mon Nov 12 00:11:14 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
 4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 1 5 9 13
physical 1: cores 1 2 5 11
physical 2: cores 0 5 9 13
physical 3: cores 1 5 9 13
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    32
On-line CPU(s) list:      0-31
Thread(s) per core:       2
Core(s) per socket:       4
Socket(s):                 4
NUMA node(s):             8
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                    85
Model name:               Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
Stepping:                 4
CPU MHz:                  3591.557
BogoMIPS:                 7183.11
Virtualization:           VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 16896K
NUMA node0 CPU(s):        0,1,16,17
NUMA node1 CPU(s):        2,3,18,19
NUMA node2 CPU(s):        4,5,20,21
NUMA node3 CPU(s):        6,7,22,23
NUMA node4 CPU(s):        8,9,24,25
NUMA node5 CPU(s):        10,11,26,27
NUMA node6 CPU(s):        12,13,28,29
NUMA node7 CPU(s):        14,15,30,31
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp rds retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 16 17
node 0 size: 47954 MB
node 0 free: 47783 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Platform Notes (Continued)

```

node 1 cpus: 2 3 18 19
node 1 size: 48383 MB
node 1 free: 48244 MB
node 2 cpus: 4 5 20 21
node 2 size: 48383 MB
node 2 free: 48297 MB
node 3 cpus: 6 7 22 23
node 3 size: 48383 MB
node 3 free: 48310 MB
node 4 cpus: 8 9 24 25
node 4 size: 48383 MB
node 4 free: 48312 MB
node 5 cpus: 10 11 26 27
node 5 size: 48383 MB
node 5 free: 48319 MB
node 6 cpus: 12 13 28 29
node 6 size: 48383 MB
node 6 free: 48308 MB
node 7 cpus: 14 15 30 31
node 7 size: 48382 MB
node 7 free: 48303 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  31  31  31  31  31  31
  1:  21  10  31  31  31  31  31  31
  2:  31  31  10  21  31  31  31  31
  3:  31  31  21  10  31  31  31  31
  4:  31  31  31  31  10  21  31  31
  5:  31  31  31  31  21  10  31  31
  6:  31  31  31  31  31  31  10  21
  7:  31  31  31  31  31  31  21  10

```

From /proc/meminfo

MemTotal: 395915644 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Platform Notes (Continued)

```
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-hefb 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Nov 12 00:09
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G   27G  826G   4% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U34 06/20/2018
Memory:
48x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
   557.xz_r(base)
-----

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)
   557.xz_r(peak)
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Compiler Version Notes (Continued)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(peak)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```




SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.60 GHz, Intel Xeon Gold 5122)

SPECrate2017_int_base = 112

SPECrate2017_int_peak = 118

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revJ.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-12 00:11:14-0500.

Report generated on 2018-12-26 12:55:58 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-25.