



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

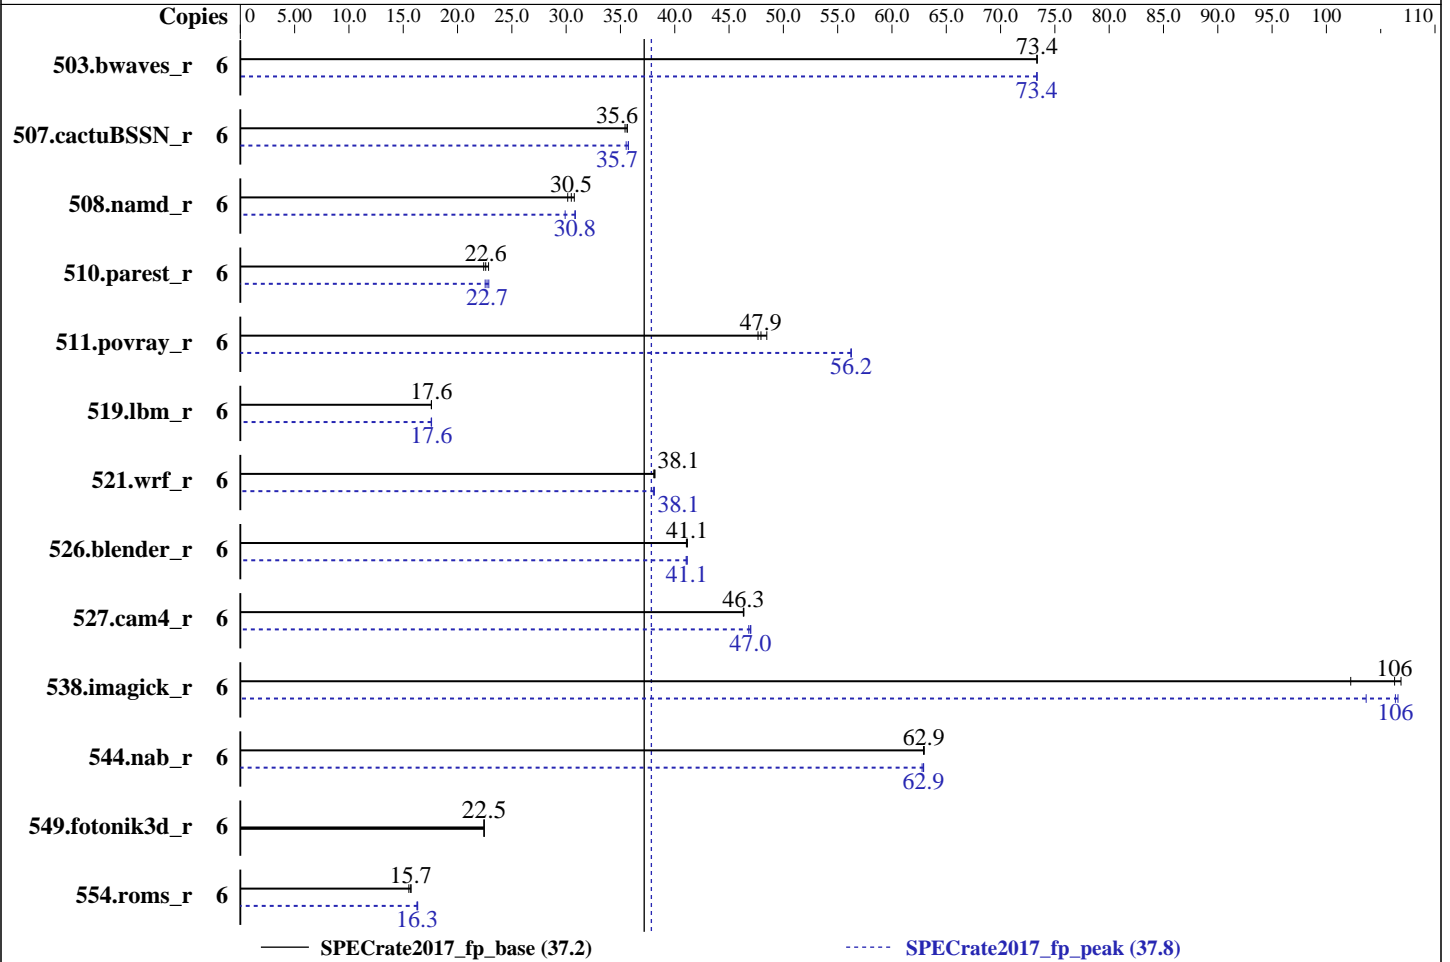

Hardware

CPU Name: Intel Xeon E-2126G
 Max MHz.: 4500
 Nominal: 3300
 Enabled: 6 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
 Kernel 3.10.0-862.11.6.el7.x86_64
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: NEC BIOS Version U43 10/02/2018 released Dec-2018
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Dec-2018
Software Availability: Aug-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	6	820	73.4	820	73.4	820	73.3	6	820	73.4	820	73.4	820	73.3
507.cactuBSSN_r	6	213	35.6	214	35.4	213	35.6	6	213	35.7	214	35.5	213	35.7
508.namd_r	6	185	30.8	189	30.1	187	30.5	6	185	30.8	185	30.9	191	29.9
510.parest_r	6	687	22.9	700	22.4	695	22.6	6	686	22.9	691	22.7	696	22.5
511.povray_r	6	292	47.9	294	47.7	289	48.5	6	249	56.2	249	56.2	249	56.2
519.lbm_r	6	359	17.6	359	17.6	359	17.6	6	360	17.6	359	17.6	359	17.6
521.wrf_r	6	352	38.1	352	38.2	353	38.1	6	353	38.1	353	38.0	353	38.1
526.blender_r	6	222	41.1	222	41.2	222	41.1	6	222	41.1	222	41.1	223	41.0
527.cam4_r	6	226	46.3	227	46.3	226	46.4	6	223	47.0	223	47.0	224	46.8
538.imagick_r	6	140	106	146	102	140	107	6	140	107	144	104	140	106
544.nab_r	6	161	62.9	160	63.0	160	62.9	6	161	62.9	161	62.9	161	62.8
549.fotonik3d_r	6	1042	22.5	1041	22.5	1042	22.4	6	1042	22.5	1041	22.5	1042	22.4
554.roms_r	6	606	15.7	614	15.5	608	15.7	6	584	16.3	585	16.3	586	16.3

SPECrate2017_fp_base = 37.2

SPECrate2017_fp_peak = 37.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "systemctl stop irqbalance.service"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Dec-2018
Software Availability: Aug-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
Thermal Configuration: Maximum Cooling
Workload Profile: Custom
Intel Virtualization Technology (Intel VT): Disabled
Energy Efficient Turbo: Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on r110j Wed Nov 14 13:54:11 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2126G CPU @ 3.30GHz
1 "physical id"s (chips)
6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 6
On-line CPU(s) list: 0-5
Thread(s) per core: 1
Core(s) per socket: 6
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Xeon(R) E-2126G CPU @ 3.30GHz
Stepping: 10

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Dec-2018
Software Availability: Aug-2018

Platform Notes (Continued)

```

CPU MHz: 4283.111
CPU max MHz: 4500.0000
CPU min MHz: 800.0000
BogoMIPS: 6624.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 12288K
NUMA node0 CPU(s): 0-5
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 dtherm ida
arat pln pts hwp hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 65385 MB
node 0 free: 63487 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65820832 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006

Test Date: Nov-2018

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2018

Tested by: NEC Corporation

Software Availability: Aug-2018

Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
Linux r110j 3.10.0-862.11.6.el7.x86_64 #1 SMP Fri Aug 10 16:55:11 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Nov 14 13:48

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  909G   85G  778G  10% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS NEC U43 10/02/2018
Memory:
4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2667
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 519.lbm_r(peak)
-----
```

```
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Dec-2018
Software Availability: Aug-2018

Compiler Version Notes (Continued)

```

=====
CXXC 508.namd_r(base) 510.parest_r(base, peak)
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(peak)
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(base) 526.blender_r(base, peak)
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(peak)
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
FC 507.cactuBSSN_r(base, peak)
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
-----

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Dec-2018
Software Availability: Aug-2018

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

Peak Optimization Flags (Continued)

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs
```

```
549.fotonik3d_r: basepeak = yes
```

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-R110j-RevC.html>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_fp_base = 37.2

Express5800/R110j-1 (Intel Xeon E-2126G)

SPECrate2017_fp_peak = 37.8

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Aug-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-R110j-RevC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-13 23:54:11-0500.

Report generated on 2018-12-26 12:59:33 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-25.