



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Dec-2018  
Hardware Availability: Oct-2018  
Software Availability: Mar-2018

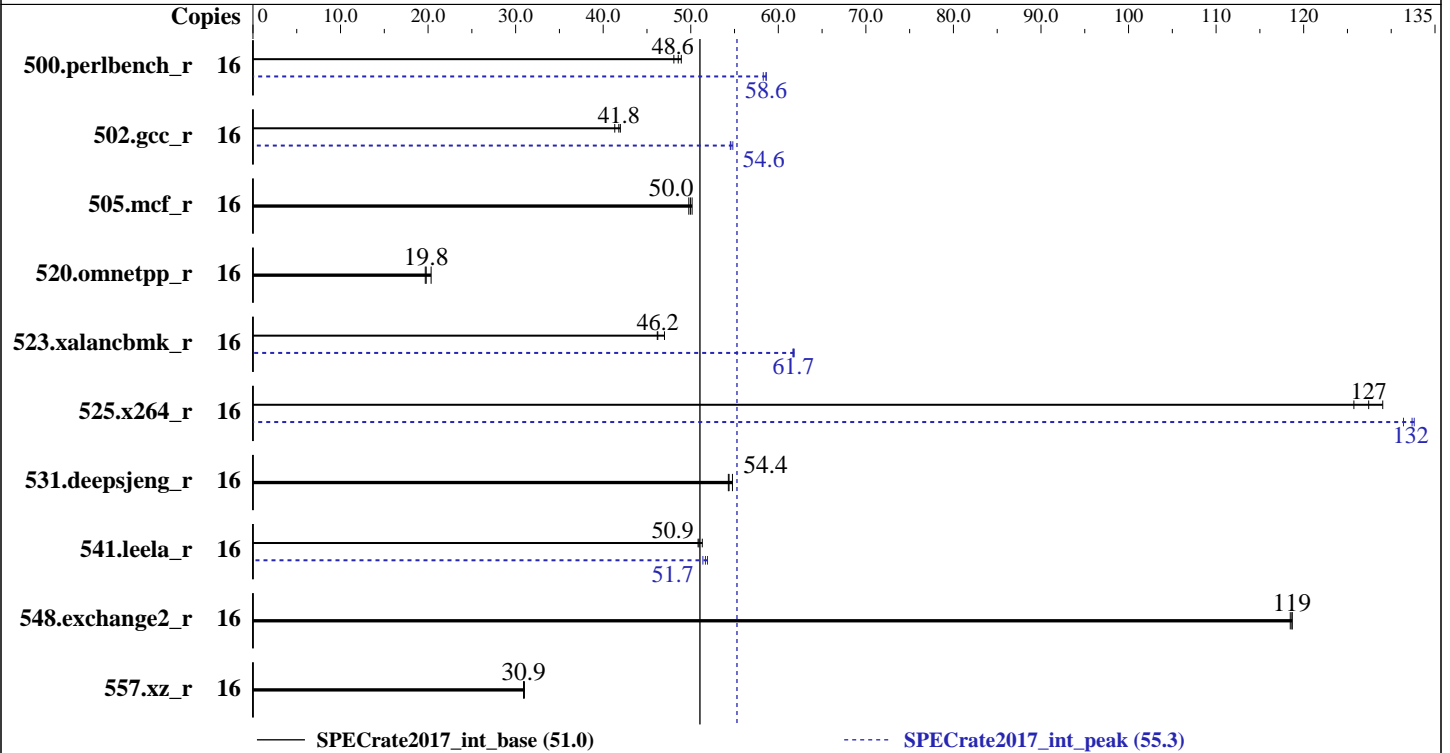

### Hardware

CPU Name: Intel Core i9-9900K  
Max MHz.: 5000  
Nominal: 3600  
Enabled: 8 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 16 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
Kernel 4.4.114-94.11-default  
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 1.0a released Sep-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Dec-2018  
Hardware Availability: Oct-2018  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	530	48.1	521	48.9	<b>524</b>	<b>48.6</b>	16	<b>435</b>	<b>58.6</b>	437	58.3	435	58.6
502.gcc_r	16	540	42.0	<b>542</b>	<b>41.8</b>	548	41.3	16	<b>415</b>	<b>54.6</b>	416	54.5	413	54.8
505.mcf_r	16	516	50.2	<b>518</b>	<b>50.0</b>	519	49.8	16	516	50.2	<b>518</b>	<b>50.0</b>	519	49.8
520.omnetpp_r	16	1032	20.3	<b>1061</b>	<b>19.8</b>	1067	19.7	16	1032	20.3	<b>1061</b>	<b>19.8</b>	1067	19.7
523.xalancbmk_r	16	360	47.0	366	46.2	<b>365</b>	<b>46.2</b>	16	273	61.8	274	61.7	<b>274</b>	<b>61.7</b>
525.x264_r	16	217	129	<b>220</b>	<b>127</b>	223	126	16	211	133	213	131	<b>212</b>	<b>132</b>
531.deepsjeng_r	16	335	54.8	338	54.3	<b>337</b>	<b>54.4</b>	16	335	54.8	338	54.3	<b>337</b>	<b>54.4</b>
541.leela_r	16	<b>520</b>	<b>50.9</b>	516	51.3	521	50.8	16	510	51.9	516	51.4	<b>513</b>	<b>51.7</b>
548.exchange2_r	16	354	118	353	119	<b>353</b>	<b>119</b>	16	354	118	353	119	<b>353</b>	<b>119</b>
557.xz_r	16	557	31.0	<b>559</b>	<b>30.9</b>	559	30.9	16	557	31.0	<b>559</b>	<b>30.9</b>	559	30.9

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Oct-2018  
**Software Availability:** Mar-2018

### General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-65nv Tue Dec 25 13:48:20 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Core(TM) i9-9900K CPU @ 3.60GHz  
1 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 16  
On-line CPU(s) list: 0-15  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Core(TM) i9-9900K CPU @ 3.60GHz  
Stepping: 12  
CPU MHz: 4863.817  
CPU max MHz: 5000.0000  
CPU min MHz: 800.0000  
BogoMIPS: 7199.88  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Oct-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```
L3 cache:                16384K
NUMA node0 CPU(s):      0-15
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1
```

```
/proc/cpuinfo cache data
cache size : 16384 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 64281 MB
node 0 free: 63763 MB
node distances:
node    0
0:     10
```

```
From /proc/meminfo
MemTotal:        65824708 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Oct-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```
Linux linux-65nv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Dec 25 10:57
```

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 145G 28G 117G 20% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 1.0a 09/27/2018
Memory:
```

```
4x Micron 18ADF2G72AZ-2G6H1R 16 GB 2 rank 2667
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)  
-----
```

```
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)  
557.xz_r(peak)  
-----
```

```
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
-----
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Dec-2018  
Hardware Availability: Oct-2018  
Software Availability: Mar-2018

## Compiler Version Notes (Continued)

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(peak)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Oct-2018  
**Software Availability:** Mar-2018

## Base Portability Flags (Continued)

520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64 -std=c11

502 gcc\_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2\_Internal/lin\_18\_0\_20180210/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m64

523.xalancbmk\_r: icpc -m32 -L/home/prasadj/specdev/IC18u2\_Internal/lin\_18\_0\_20180210/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Oct-2018  
**Software Availability:** Mar-2018

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: basepeak = yes

541.leela\_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i9-9900K)

SPECrate2017\_int\_base = 51.0

SPECrate2017\_int\_peak = 55.3

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2018  
**Hardware Availability:** Oct-2018  
**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

541.leela\_r (continued):

`-L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-12-25 00:48:19-0500.

Report generated on 2019-01-22 16:44:20 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.