



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2018

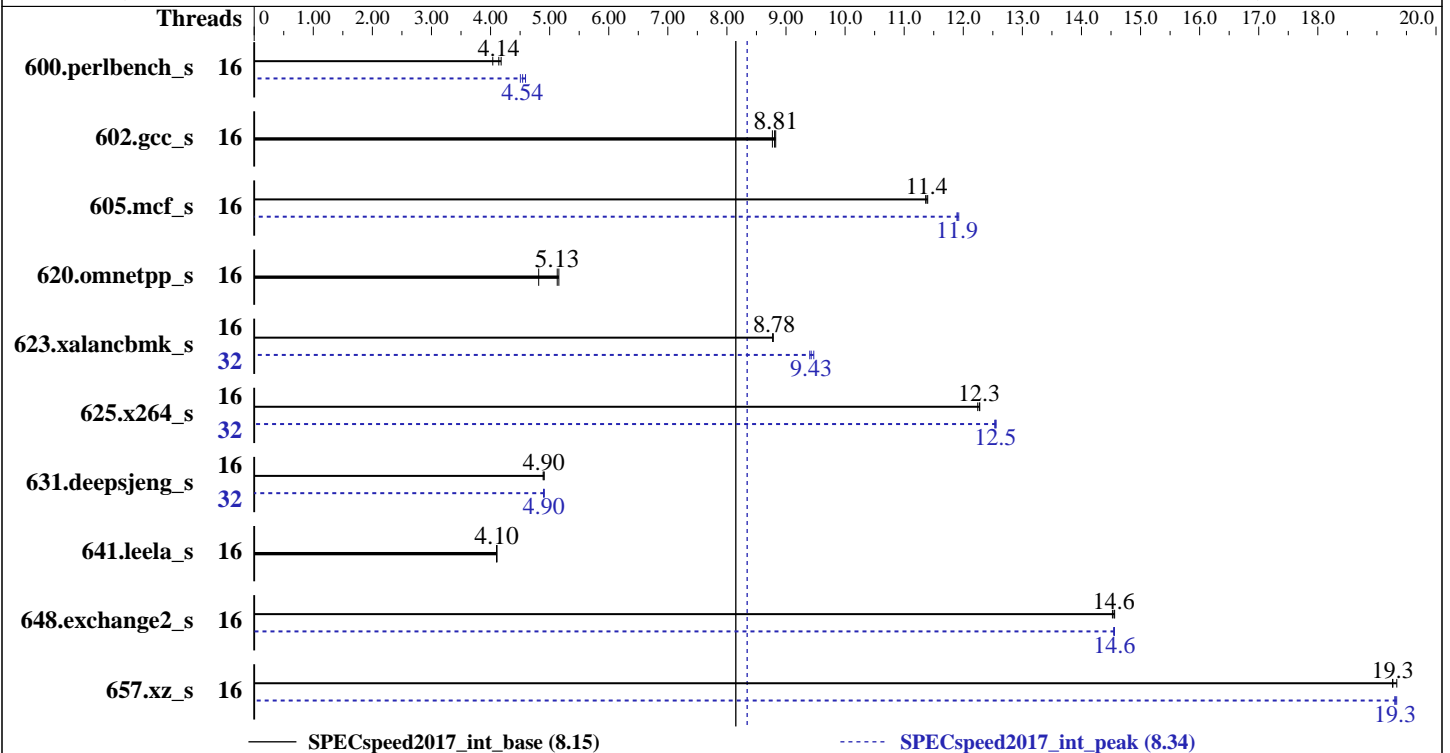

### Hardware

CPU Name: AMD EPYC 7371  
 Max MHz.: 3800  
 Nominal: 3100  
 Enabled: 16 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 400 GB SAS SSD RAID 0  
 Other: None

### Software

OS: SUSE linux Enterprise Server 12 (x86\_64) SP3  
 Kernel version 4.4.132-94.33-default  
 Compiler: C/C++: Version 1.2.1 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version A41 10/02/2018 released Oct-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.1.0



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2019  
Hardware Availability: Apr-2019  
Software Availability: Jul-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	<b>429</b>	<b>4.14</b>	425	4.18	440	4.04	16	<b>391</b>	<b>4.54</b>	387	4.59	394	4.50
602.gcc_s	16	451	8.83	454	8.77	<b>452</b>	<b>8.81</b>	16	451	8.83	454	8.77	<b>452</b>	<b>8.81</b>
605.mcf_s	16	414	11.4	415	11.4	<b>415</b>	<b>11.4</b>	16	<b>397</b>	<b>11.9</b>	396	11.9	397	11.9
620.omnetpp_s	16	<b>318</b>	<b>5.13</b>	316	5.16	339	4.81	16	<b>318</b>	<b>5.13</b>	316	5.16	339	4.81
623.xalancbmk_s	16	<b>161</b>	<b>8.78</b>	161	8.78	161	8.77	32	<b>150</b>	<b>9.43</b>	151	9.40	150	9.47
625.x264_s	16	144	12.2	144	12.3	<b>144</b>	<b>12.3</b>	32	141	12.5	140	12.6	<b>141</b>	<b>12.5</b>
631.deepsjeng_s	16	292	4.91	<b>292</b>	<b>4.90</b>	293	4.89	32	292	4.91	<b>292</b>	<b>4.90</b>	293	4.90
641.leela_s	16	416	4.10	415	4.11	<b>416</b>	<b>4.10</b>	16	416	4.10	415	4.11	<b>416</b>	<b>4.10</b>
648.exchange2_s	16	<b>202</b>	<b>14.6</b>	202	14.5	202	14.6	16	202	14.5	202	14.6	<b>202</b>	<b>14.6</b>
657.xz_s	16	321	19.3	320	19.3	<b>321</b>	<b>19.3</b>	16	320	19.3	<b>320</b>	<b>19.3</b>	320	19.3

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.2.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> = 2MiB.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Jul-2018

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH = "/home/cpu2017/amd1806-speed-libs-revA/64:/home/cpu2017/amd1806-speed-libs-revA/32:"
OMP_PROC_BIND = "true"
OMP_STACKSIZE = "192M"
OMP_WAIT_POLICY = "active"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration

```
AMD SMT Option set to Disabled
Thermal Configuration set to Maximum Cooling
Performance Determinism set to Power Deterministic
Workload Power and Utilization Monitoring set to Disabled
Minimum Processor Idle Power core C-State set to C6 State
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-qlr8 Thu Feb 7 14:37:19 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7371 16-Core Processor
1 "physical id"s (chips)
16 "processors"
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Jul-2018

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings  : 16
physical 0: cores 0 1 8 9 16 17 24 25 32 33 40 41 48 49 56 57
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 16
On-line CPU(s) list:   0-15
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):              1
NUMA node(s):          4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7371 16-Core Processor
Stepping:               2
CPU MHz:                3100.000
CPU max MHz:            3100.0000
CPU min MHz:            2500.0000
BogoMIPS:               6188.22
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-3
NUMA node1 CPU(s):     4-7
NUMA node2 CPU(s):     8-11
NUMA node3 CPU(s):     12-15
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate ssbd retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
irperf ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2018

## Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3
node 0 size: 128841 MB
node 0 free: 128663 MB
node 1 cpus: 4 5 6 7
node 1 size: 129022 MB
node 1 free: 128871 MB
node 2 cpus: 8 9 10 11
node 2 size: 129022 MB
node 2 free: 128916 MB
node 3 cpus: 12 13 14 15
node 3 size: 129022 MB
node 3 free: 128850 MB
node distances:
node  0  1  2  3
  0:  10  16  16  16
  1:  16  10  16  16
  2:  16  16  10  16
  3:  16  16  16  10

```

```

From /proc/meminfo
MemTotal:      528291400 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2018

## Platform Notes (Continued)

uname -a:

```
Linux linux-qlr8 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB
```

run-level 3 Feb 7 14:36

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G  4.4G  326G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A41 10/02/2018

Memory:

```
8x UNKNOWN NOT AVAILABLE
8x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CXXC 623.xalancbmk\_s(peak)  
=====

```
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm
18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM
AOCC.LLVM.1.2.1.B29.2018_05_14)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.2.1/AOCC-1.2.1-Compiler/bin
=====
```

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak)
625.x264\_s(base) 657.xz\_s(base, peak)  
=====

```
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Jul-2018

## Compiler Version Notes (Continued)

b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm  
18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM  
AOCC.LLVM.1.2.1.B29.2018\_05\_14)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.2.1/AOCC-1.2.1-Compiler/bin

=====  
CXXC 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base,  
peak) 641.leela\_s(base)

=====  
AOCC.LLVM.1.2.1.B29.2018\_05\_14 clang version 6.0.0 (CLANG:  
b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm  
18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM  
AOCC.LLVM.1.2.1.B29.2018\_05\_14)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.2.1/AOCC-1.2.1-Compiler/bin

=====  
CC 600.perlbench\_s(peak) 625.x264\_s(peak)

=====  
AOCC.LLVM.1.2.1.B29.2018\_05\_14 clang version 6.0.0 (CLANG:  
b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm  
18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM  
AOCC.LLVM.1.2.1.B29.2018\_05\_14)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.2.1/AOCC-1.2.1-Compiler/bin

=====  
CXXC 641.leela\_s(peak)

=====  
AOCC.LLVM.1.2.1.B29.2018\_05\_14 clang version 6.0.0 (CLANG:  
b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm  
18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM  
AOCC.LLVM.1.2.1.B29.2018\_05\_14)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.2.1/AOCC-1.2.1-Compiler/bin

=====  
FC 648.exchange2\_s(base, peak)

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2018

## Compiler Version Notes (Continued)

-----

GNU Fortran (GCC) 4.8.2  
 Copyright (C) 2013 Free Software Foundation, Inc.  
 GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
 You may redistribute copies of GNU Fortran  
 under the terms of the GNU General Public License.  
 For more information about these matters, see the file named COPYING

-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
 602.gcc\_s: -DSPEC\_LP64  
 605.mcf\_s: -DSPEC\_LP64  
 620.omnetpp\_s: -DSPEC\_LP64  
 623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
 625.x264\_s: -DSPEC\_LP64  
 631.deepsjeng\_s: -DSPEC\_LP64  
 641.leela\_s: -DSPEC\_LP64  
 648.exchange2\_s: -DSPEC\_LP64  
 657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -O3  
 -ffast-math -march=znver1 -fstruct-layout=3  
 -mllvm -unroll-threshold=50 -fremap-arrays -mno-avx2  
 -mllvm -inline-threshold=1000 -flv-function-specialization  
 -mllvm -enable-gvn-hoist -mllvm -function-specialize -z muldefs

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2018

## Base Optimization Flags (Continued)

C benchmarks (continued):

-lamdlibm -DSPEC\_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc

C++ benchmarks:

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto -fuse-ld=lld  
-Wl,-mllvm -Wl,-function-specialize -O3 -march=znver1 -ffast-math  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -fremap-arrays  
-mllvm -inline-threshold=1000 -z muldefs -lamdlibm -DSPEC\_OPENMP  
-fopenmp -fopenmp=libomp -lomp -ljemalloc

Fortran benchmarks:

-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant  
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150  
-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -O3  
-funroll-loops -ffast-math -z muldefs -lamdlibm -fplugin=dragonegg.so  
-specs=integrated-as.specs  
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify  
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive  
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC\_OPENMP  
-fopenmp -fopenmp=libomp -lomp -ljemalloc -lgfortran

## Base Other Flags

C benchmarks:

-Wno-return-type -DUSE\_OPENMP

C++ benchmarks:

-Wno-return-type -DUSE\_OPENMP

Fortran benchmarks:

-DUSE\_OPENMP -Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Jul-2018

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization
-mllvm -enable-vectorize-compares -z muldefs -lamdlibm
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc
```

```
602.gcc_s: basepeak = yes
```

```
605.mcf_s: -flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize
-Ofast -march=znver1 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization
-mllvm -enable-vectorize-compares -z muldefs -lamdlibm
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Jul-2018

## Peak Optimization Flags (Continued)

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m32 -fuse-ld=lld -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-flto -Wl,-mllvm -Wl,-function-specialize -Ofast
-march=znver1 -flv-function-specialization
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -z muldefs -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -libs- revA/32 -ljemalloc
```

```
631.deepsjeng_s: -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -Ofast
-march=znver1 -flv-function-specialization
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -z muldefs -lamdlibm
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc
```

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -O3
-funroll-loops -ffast-math -z muldefs -lamdlibm -fplugin=dragonegg.so
-specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -ljemalloc -lgfortran
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -DUSE_OPENMP
```

C++ benchmarks (except as noted below):

```
-Wno-return-type -DUSE_OPENMP
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECspeed2017\_int\_base = 8.15

SPECspeed2017\_int\_peak = 8.34

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Jul-2018

## Peak Other Flags (Continued)

623.xalancbmk\_s: -Wno-return-type -DUSE\_OPENMP  
-L/root/work/cpu2017/v105/amd1806-speed

Fortran benchmarks:

-DUSE\_OPENMP -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-02-07 15:37:18-0500.

Report generated on 2019-04-03 17:24:08 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-03.