



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55


Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

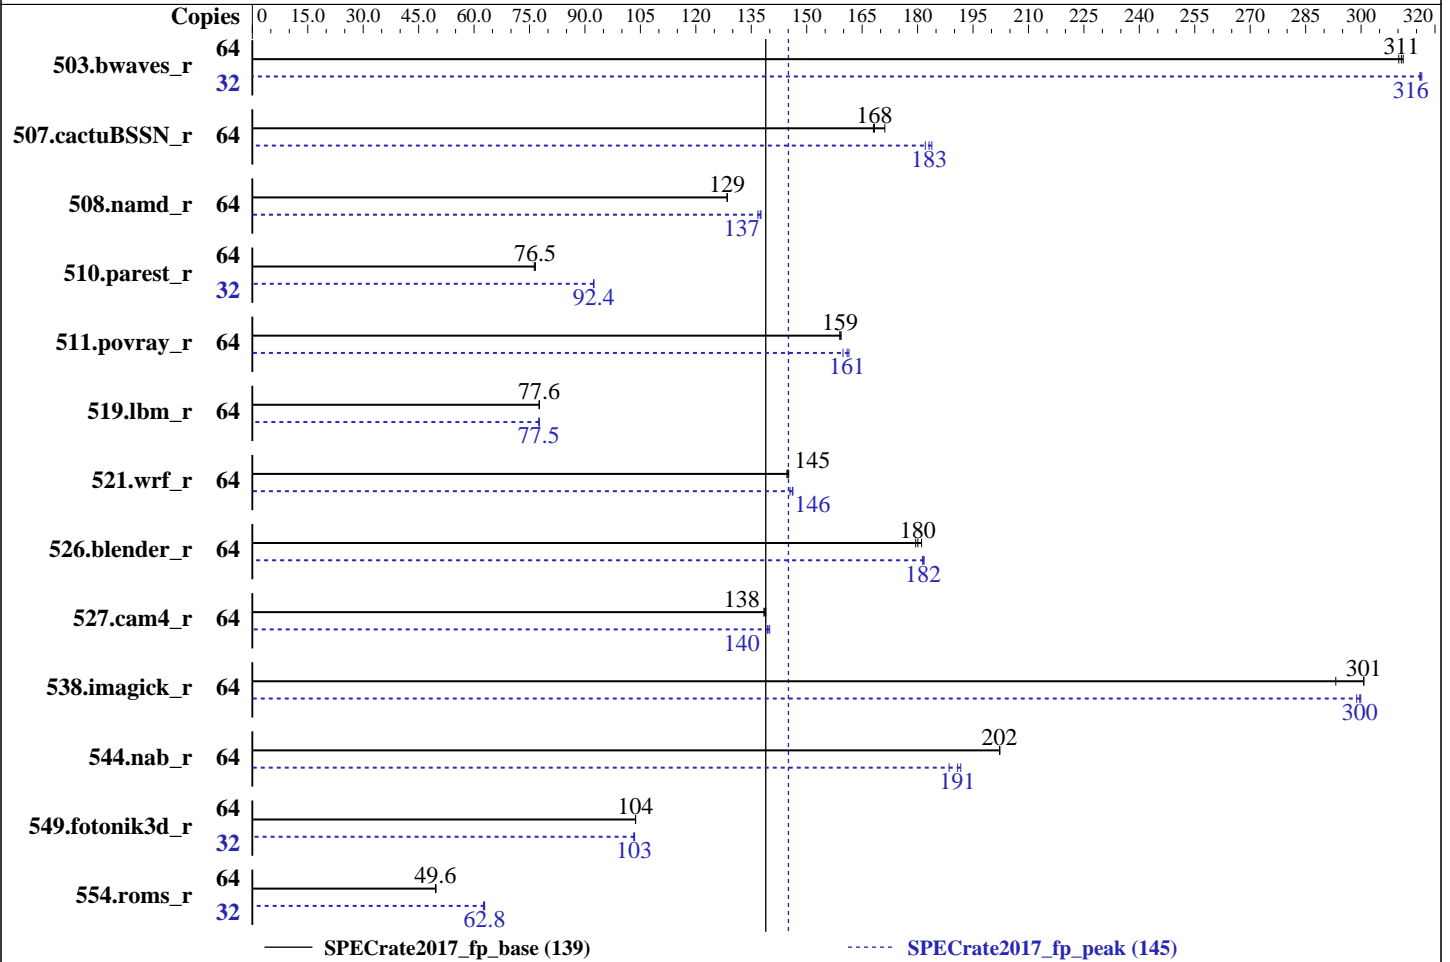

### Hardware

CPU Name: AMD EPYC 7551P  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2667V-L)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15-45-generic  
 Compiler: C/C++: Version 1.3.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.8.4 Released Feb-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library V4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	2061	311	<b>2064</b>	<b>311</b>	2069	310	32	1016	316	1014	316	<b>1015</b>	<b>316</b>
507.cactuBSSN_r	64	<b>481</b>	<b>168</b>	482	168	473	171	64	445	182	<b>442</b>	<b>183</b>	441	184
508.namd_r	64	473	129	<b>473</b>	<b>129</b>	473	128	64	442	138	444	137	<b>442</b>	<b>137</b>
510.parest_r	64	<b>2188</b>	<b>76.5</b>	2186	76.6	2195	76.3	32	<b>906</b>	<b>92.4</b>	906	92.4	906	92.4
511.povray_r	64	940	159	<b>940</b>	<b>159</b>	938	159	64	<b>929</b>	<b>161</b>	935	160	926	161
519.lbm_r	64	868	77.7	869	77.6	<b>869</b>	<b>77.6</b>	64	869	77.7	<b>870</b>	<b>77.5</b>	870	77.5
521.wrf_r	64	<b>990</b>	<b>145</b>	991	145	988	145	64	980	146	<b>981</b>	<b>146</b>	985	145
526.blender_r	64	538	181	543	179	<b>541</b>	<b>180</b>	64	538	181	<b>537</b>	<b>182</b>	536	182
527.cam4_r	64	<b>808</b>	<b>138</b>	806	139	808	138	64	803	139	<b>802</b>	<b>140</b>	800	140
538.imagick_r	64	543	293	<b>529</b>	<b>301</b>	529	301	64	533	299	<b>531</b>	<b>300</b>	531	300
544.nab_r	64	533	202	533	202	<b>533</b>	<b>202</b>	64	571	189	<b>564</b>	<b>191</b>	562	192
549.fotonik3d_r	64	<b>2406</b>	<b>104</b>	2406	104	2405	104	32	1208	103	1206	103	<b>1207</b>	<b>103</b>
554.roms_r	64	2046	49.7	<b>2052</b>	<b>49.6</b>	2052	49.6	32	813	62.5	809	62.9	<b>810</b>	<b>62.8</b>

SPECrate2017\_fp\_base = 139

SPECrate2017\_fp\_peak = 145

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here: <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Operating System Notes (Continued)

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/64:/home/cpu2017-1.0.5/amd1812na_rate_revA_lib/32:"
```

Binaries were compiled on a system with 2 x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5  
in RHEL v7.2 under default conditions.  
jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>  
jemalloc uses environment variable MALLOC\_CONF  
with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use  
for automatic multiplexing  
of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log  
base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> =  
2MiB.

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost enabled

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

C States set to Autonomous  
 Memory Patrol Scrub disabled  
 Memory Refresh Rate set to 1x  
 PCI ASPM L1 Link Power Management disabled  
 Determinism Slider set to Power Determinism  
 Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on bionic-beaver-sut Thu Mar 28 22:16:33 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7551P 32-Core Processor
 1 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings  : 64
 physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
                29 30 31
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              1
NUMA node(s):          4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7551P 32-Core Processor
Stepping:               2
CPU MHz:                2653.180
BogoMIPS:               3992.46
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

```

NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid amd_dcm aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
hw_pstate sme ssbd ibpb vmmcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 xsaves clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
node 0 size: 128635 MB
node 0 free: 128428 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61
node 1 size: 129017 MB
node 1 free: 128813 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62
node 2 size: 128996 MB
node 2 free: 128778 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63
node 3 size: 129016 MB
node 3 free: 128802 MB
node distances:
node  0  1  2  3
0:   10  16  16  16
1:   16  10  16  16
2:   16  16  10  16
3:   16  16  16  10

```

```

From /proc/meminfo
MemTotal:      528041812 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

debian\_version: buster/sid

os-release:

NAME="Ubuntu"

VERSION="18.04.2 LTS (Bionic Beaver)"

ID=ubuntu

ID\_LIKE=debian

PRETTY\_NAME="Ubuntu 18.04.2 LTS"

VERSION\_ID="18.04"

HOME\_URL="https://www.ubuntu.com/"

SUPPORT\_URL="https://help.ubuntu.com/"

uname -a:

Linux bionic-beaver-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB

run-level 3 Mar 28 10:58

SPEC is set to: /home/cpu2017-1.0.5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	25G	392G	6%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.8.4 02/22/2019

Memory:

8x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666

8x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
 CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
 =====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
 AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
 CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
 =====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
 AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
 AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
 AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
 FC 507.cactuBSSN\_r(base, peak)  
 =====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
 AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
 AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
 AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
 GNU Fortran (GCC) 4.8.2  
 Copyright (C) 2013 Free Software Foundation, Inc.  
 GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
 You may redistribute copies of GNU Fortran

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

-----  
GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING

=====  
CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -lamdlibm -lpthread -ldl
-ljemalloc
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -freemap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(gfortran)
-O3(clang) -mavx -madox -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(clang) -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -O3(gfortran) -mavx -madox -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false -z muldefs
-lpthread -ldl -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3(clang) -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false
-O3(gfortran) -mavx -madox -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-lpthread -ldl -ljemalloc
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread
-ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(clang) -mavx
-ffast-math -O3(gfortran) -funroll-loops
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -O3(gfortran) -O3(clang)
-mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -lpthread -ldl
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madx
-funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread
-ldl -ljemalloc
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 139

PowerEdge R6415 (AMD EPYC 7551P, 2.00GHz)

SPECrate2017\_fp\_peak = 145

**CPU2017 License:** 55

**Test Date:** Mar-2019

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Apr-2019

**Tested by:** Dell Inc.

**Software Availability:** Feb-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-28 18:16:33-0400.

Report generated on 2019-04-16 17:18:32 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-16.