



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2019

Hardware Availability: Dec-2018

Software Availability: Nov-2018

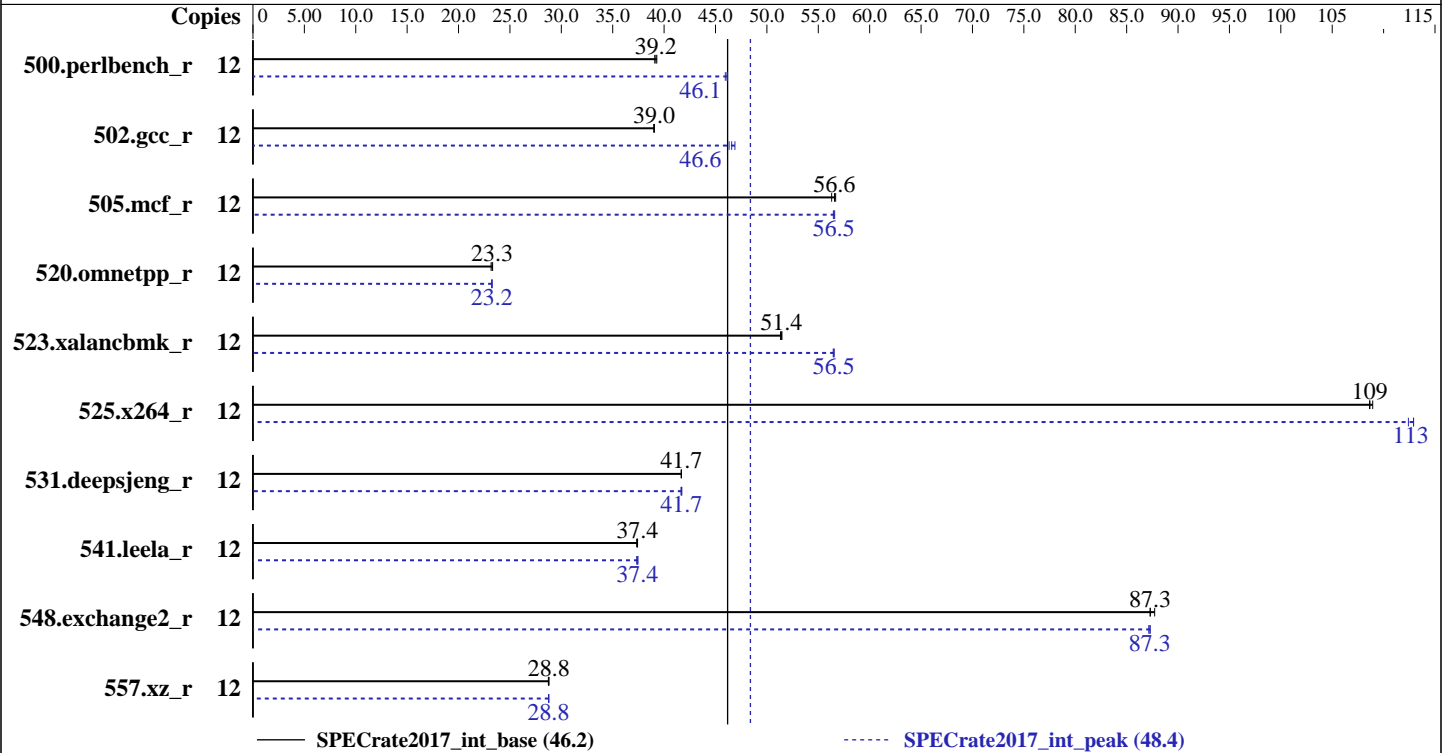

### Hardware

CPU Name: Intel Xeon E-2146G  
 Max MHz.: 4500  
 Nominal: 3500  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 500 GB SATA HDD, 7200RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.120-94.17-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version 0502 released Nov-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2019

Hardware Availability: Dec-2018

Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	<b>487</b>	<b>39.2</b>	489	39.1	486	39.3	12	416	46.0	414	46.1	<b>414</b>	<b>46.1</b>
502.gcc_r	12	435	39.0	436	39.0	<b>435</b>	<b>39.0</b>	12	<b>365</b>	<b>46.6</b>	362	46.9	367	46.3
505.mcf_r	12	344	56.3	<b>343</b>	<b>56.6</b>	342	56.7	12	343	56.5	343	56.6	<b>343</b>	<b>56.5</b>
520.omnetpp_r	12	<b>677</b>	<b>23.3</b>	680	23.2	675	23.3	12	<b>677</b>	<b>23.2</b>	677	23.3	678	23.2
523.xalancbmk_r	12	246	51.5	247	51.3	<b>247</b>	<b>51.4</b>	12	224	56.5	<b>224</b>	<b>56.5</b>	224	56.5
525.x264_r	12	<b>193</b>	<b>109</b>	193	109	193	109	12	<b>186</b>	<b>113</b>	186	113	187	112
531.deepsjeng_r	12	<b>330</b>	<b>41.7</b>	330	41.7	330	41.7	12	330	41.6	330	41.7	<b>330</b>	<b>41.7</b>
541.leela_r	12	532	37.3	<b>531</b>	<b>37.4</b>	531	37.4	12	532	37.3	<b>531</b>	<b>37.4</b>	530	37.5
548.exchange2_r	12	358	87.7	360	87.3	<b>360</b>	<b>87.3</b>	12	360	87.3	<b>360</b>	<b>87.3</b>	361	87.2
557.xz_r	12	450	28.8	<b>450</b>	<b>28.8</b>	451	28.7	12	<b>451</b>	<b>28.8</b>	451	28.8	450	28.8

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/spec2017\_new/lib/ia32:/spec2017\_new/lib/intel64:  
/spec2017\_new/je5.0.1-32:/spec2017\_new/je5.0.1-64"  
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or  
https://github.com/jemalloc/jemalloc/releases  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** May-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Nov-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Configuration:

VT-d = Disabled

AES = Disabled

Hardware Prefetcher = Disabled

Adjacent Cache Line Prefetch = Disabled

Race to Halt (RTH) = Disabled

Sysinfo program /spec2017\_new/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Thu May 9 18:37:44 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2146G CPU @ 3.50GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2146G CPU @ 3.50GHz

Stepping: 10

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2019

Hardware Availability: Dec-2018

Software Availability: Nov-2018

### Platform Notes (Continued)

```

CPU MHz: 4314.448
CPU max MHz: 4500.0000
CPU min MHz: 800.0000
BogoMIPS: 7007.97
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 12288K
NUMA node0 CPU(s): 0-11

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl stibp retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 64313 MB
node 0 free: 63801 MB
node distances:
node 0
0: 10

```

From /proc/meminfo

```

MemTotal: 65857384 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2019

Hardware Availability: Dec-2018

Software Availability: Nov-2018

### Platform Notes (Continued)

```

VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):           Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

```

run-level 3 May 9 18:35

SPEC is set to: /spec2017\_new

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       btrfs    445G     139G   305G   32% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0502 11/15/2018

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2666

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
CC      502.gcc_r(peak)
-----

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.1.144 Build 20181018

```

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

=====
CC      500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        525.x264_r(base, peak) 557.xz_r(base, peak)

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2019

Hardware Availability: Dec-2018

Software Availability: Nov-2018

## Compiler Version Notes (Continued)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 523.xalancbmk\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: May-2019

Hardware Availability: Dec-2018

Software Availability: Nov-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** May-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Nov-2018

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-fno-strict-overflow
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** May-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Nov-2018

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmallocc
```

525.x264\_r: -Wl, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -fno-alias
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmallocc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmallocc
```

523.xalancbmk\_r: -Wl, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemallocc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.50 GHz, Intel Xeon E-2146G)

SPECrate2017\_int\_base = 46.2

SPECrate2017\_int\_peak = 48.4

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** May-2019

**Hardware Availability:** Dec-2018

**Software Availability:** Nov-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-05-09 06:37:44-0400.

Report generated on 2019-06-25 18:49:54 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-25.