



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066


Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

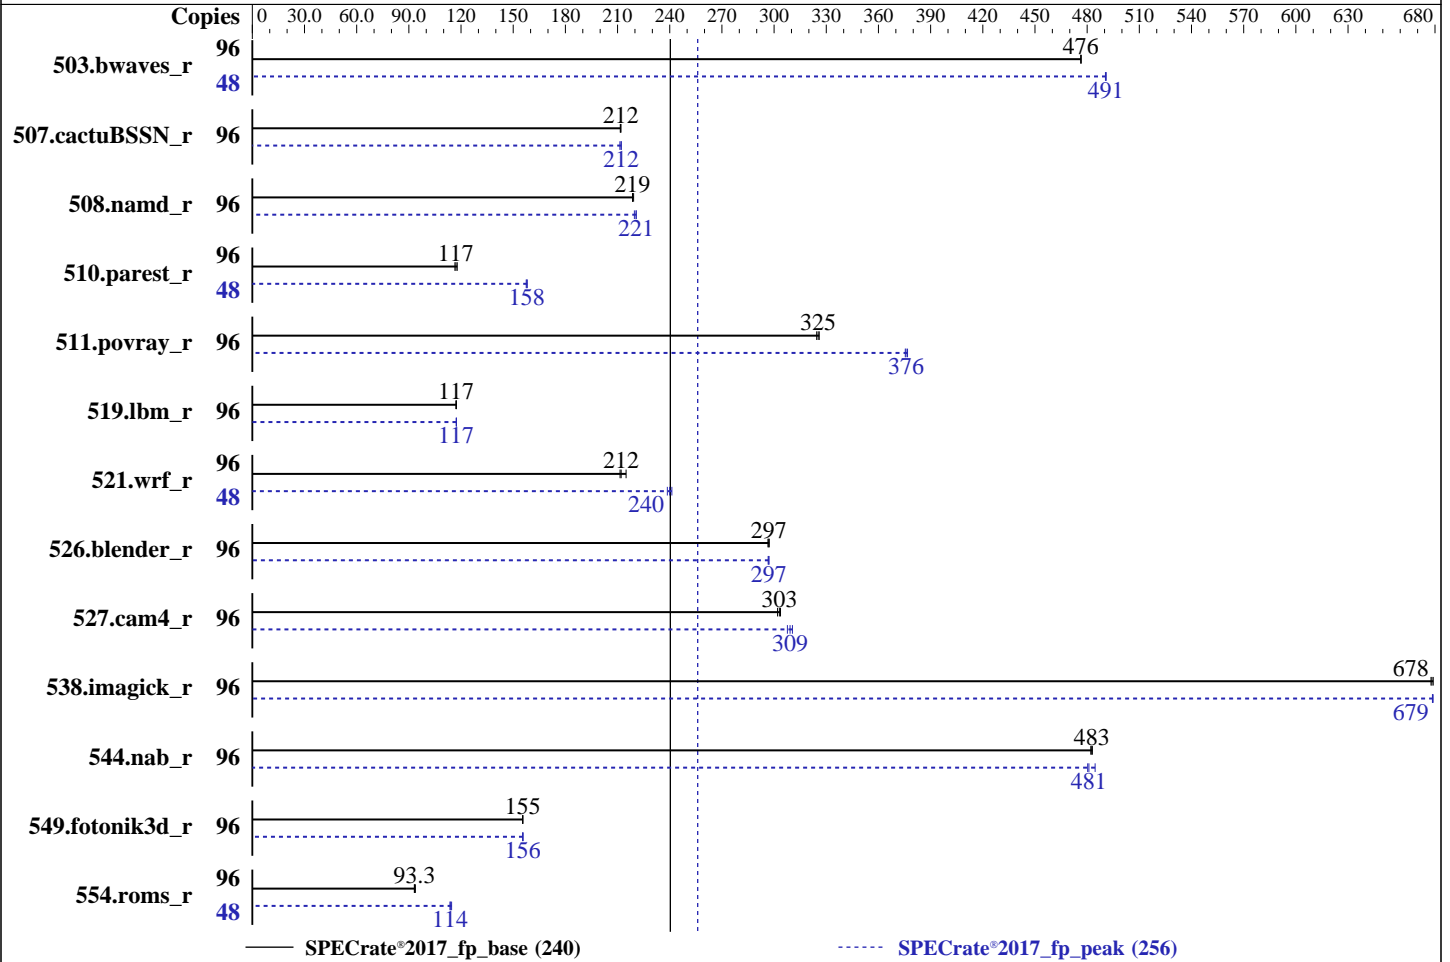

Hardware

CPU Name: Intel Xeon Platinum 8168
 Max MHz: 3700
 Nominal: 2700
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
 3.10.0-957.el7.x86_64
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Version 2.00.30 released Jun-2019 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2017

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<u>2020</u>	<u>476</u>	2021	476	2020	476	48	981	491	981	491	<u>981</u>	<u>491</u>
507.cactuBSSN_r	96	<u>574</u>	<u>212</u>	574	212	574	212	96	<u>573</u>	<u>212</u>	573	212	575	211
508.namd_r	96	<u>417</u>	<u>219</u>	417	219	416	219	96	415	220	413	221	<u>413</u>	<u>221</u>
510.parest_r	96	2132	118	<u>2145</u>	<u>117</u>	2156	116	48	794	158	<u>795</u>	<u>158</u>	797	157
511.povray_r	96	691	324	<u>689</u>	<u>325</u>	688	326	96	595	377	597	375	<u>596</u>	<u>376</u>
519.lbm_r	96	864	117	<u>863</u>	<u>117</u>	863	117	96	<u>863</u>	<u>117</u>	863	117	862	117
521.wrf_r	96	1001	215	<u>1014</u>	<u>212</u>	1017	211	48	451	239	<u>448</u>	<u>240</u>	446	241
526.blender_r	96	492	297	<u>492</u>	<u>297</u>	493	296	96	<u>492</u>	<u>297</u>	492	297	493	297
527.cam4_r	96	556	302	553	304	<u>554</u>	<u>303</u>	96	<u>543</u>	<u>309</u>	546	308	541	311
538.imagick_r	96	<u>352</u>	<u>678</u>	352	679	352	678	96	352	679	<u>352</u>	<u>679</u>	352	679
544.nab_r	96	335	482	<u>335</u>	<u>483</u>	335	483	96	336	480	333	485	<u>336</u>	<u>481</u>
549.fotonik3d_r	96	2407	155	<u>2406</u>	<u>155</u>	2405	156	96	2404	156	2406	155	<u>2406</u>	<u>156</u>
554.roms_r	96	1627	93.8	1638	93.1	<u>1635</u>	<u>93.3</u>	48	666	115	671	114	<u>670</u>	<u>114</u>

SPECrate®2017_fp_base = 240

SPECrate®2017_fp_peak = 256

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Set SNC to Enabled
Set IMC Interleaving to 1-way Interleave
Set DCU Streamer Prefetch to Disabled
Set XPT Prefetch to Enabled
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Thu Aug 29 07:28:23 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 24
siblings       : 48
physical 0:    cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1:    cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          96
On-line CPU(s) list:  0-95
Thread(s) per core:  2
Core(s) per socket:  24
Socket(s):       2
NUMA node(s):    4
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping:        4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Platform Notes (Continued)

```

CPU MHz: 1200.036
CPU max MHz: 3700.0000
CPU min MHz: 1200.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bml1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
node 0 size: 195224 MB
node 0 free: 190218 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
node 1 size: 196608 MB
node 1 free: 192029 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
node 2 size: 196608 MB
node 2 free: 192085 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
node 3 size: 196608 MB
node 3 free: 192014 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Platform Notes (Continued)

```
2: 21 21 10 11
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 790961956 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Aug 29 07:25

SPEC is set to: /home/speccpu

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 169G 59G 110G 35% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.00.30 06/20/2019

Memory:

24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
        | 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
 527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.xml



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 240

H3C UniServer R4900 G3 (Intel Xeon Platinum 8168)

SPECrate®2017_fp_peak = 256

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2019

Hardware Availability: Jul-2017

Software Availability: May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-29 07:28:23-0400.

Report generated on 2019-09-17 16:06:18 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.