



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55


Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

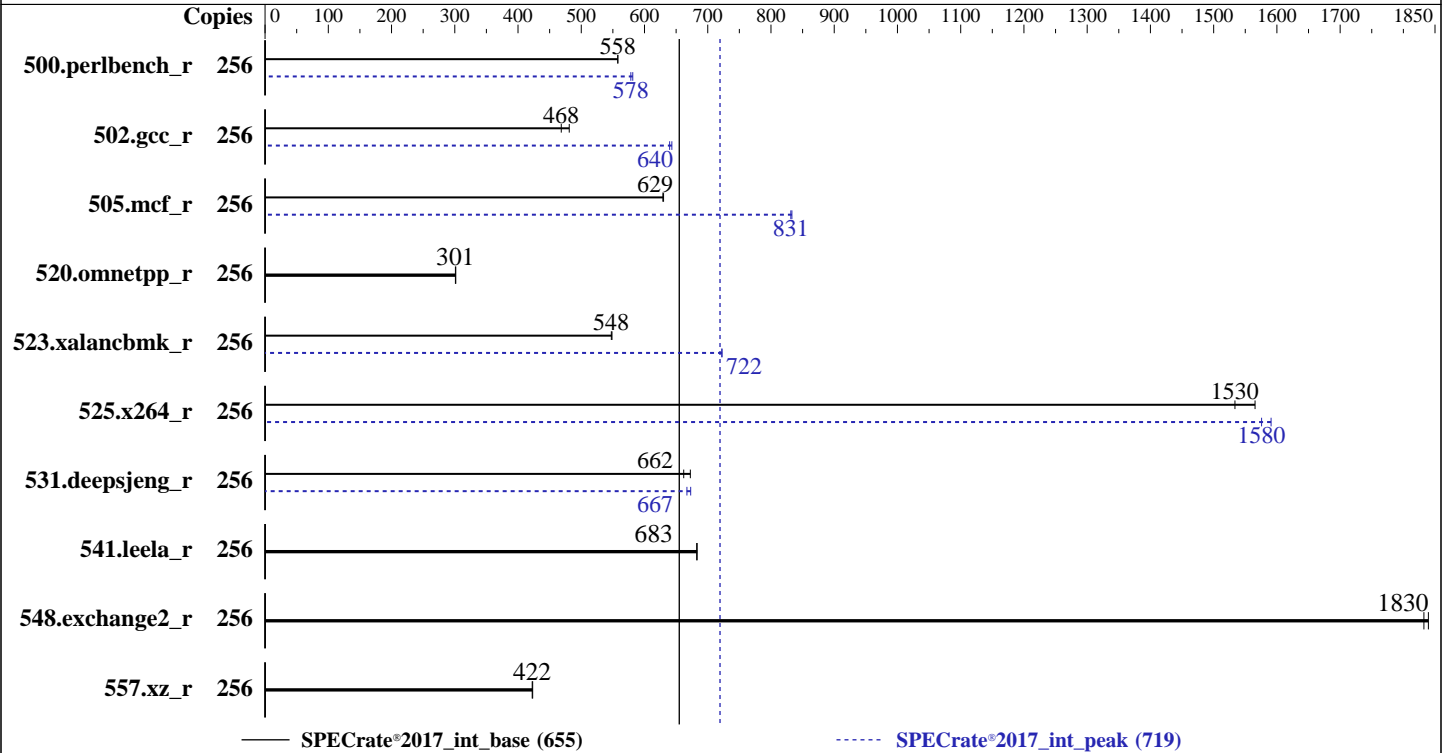

Hardware

CPU Name: AMD EPYC 7662
 Max MHz: 3300
 Nominal: 2000
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 800 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.2.7 released Dec-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	731	558	<u>731</u>	<u>558</u>			256	701	581	<u>705</u>	<u>578</u>		
502.gcc_r	256	754	481	<u>774</u>	<u>468</u>			256	564	643	<u>567</u>	<u>640</u>		
505.mcf_r	256	657	630	<u>658</u>	<u>629</u>			256	497	833	<u>498</u>	<u>831</u>		
520.omnetpp_r	256	1114	302	<u>1116</u>	<u>301</u>			256	1114	302	<u>1116</u>	<u>301</u>		
523.xalancbmk_r	256	<u>494</u>	<u>548</u>	493	549			256	374	723	<u>374</u>	<u>722</u>		
525.x264_r	256	<u>292</u>	<u>1530</u>	286	1570			256	282	1590	<u>284</u>	<u>1580</u>		
531.deepsjeng_r	256	436	672	<u>443</u>	<u>662</u>			256	<u>440</u>	<u>667</u>	436	673		
541.leela_r	256	<u>621</u>	<u>683</u>	620	683			256	<u>621</u>	<u>683</u>	620	683		
548.exchange2_r	256	365	1840	<u>366</u>	<u>1830</u>			256	365	1840	<u>366</u>	<u>1830</u>		
557.xz_r	256	653	423	<u>655</u>	<u>422</u>			256	653	423	<u>655</u>	<u>422</u>		

SPECrate®2017_int_base = 655

SPECrate®2017_int_peak = 719

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

```
"/mnt/ramdisk/cpu2017-1.1.0/amd_rate_aocc200_rome_C_lib/64:/mnt/ramdisk/
cpu2017-1.1.0/amd_rate_aocc200_rome_C_lib/32:"
```

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fltto
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4

CCX as NUMA Domain set to Enabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to 3200

Turbo Boost Enabled

Cstates set to Enabled

Memory Patrol Scrub Disabled

Memory Refresh Rate set to 1x

PCI ASPM L1 Link Power Management Disabled

Determinism Slider set to Power Determinism

Efficiency Optimized Mode Disabled

Memory Interleaving set to Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.0/bin/sysinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Thu Dec 5 11:36:51 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7662 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:  0-255
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):             2
NUMA node(s):         32
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7662 64-Core Processor
Stepping:              0
CPU MHz:               1996.202
BogoMIPS:              3992.40
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-3,128-131
NUMA node1 CPU(s):    4-7,132-135
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

NUMA node2 CPU(s): 8-11,136-139
 NUMA node3 CPU(s): 12-15,140-143
 NUMA node4 CPU(s): 16-19,144-147
 NUMA node5 CPU(s): 20-23,148-151
 NUMA node6 CPU(s): 24-27,152-155
 NUMA node7 CPU(s): 28-31,156-159
 NUMA node8 CPU(s): 32-35,160-163
 NUMA node9 CPU(s): 36-39,164-167
 NUMA node10 CPU(s): 40-43,168-171
 NUMA node11 CPU(s): 44-47,172-175
 NUMA node12 CPU(s): 48-51,176-179
 NUMA node13 CPU(s): 52-55,180-183
 NUMA node14 CPU(s): 56-59,184-187
 NUMA node15 CPU(s): 60-63,188-191
 NUMA node16 CPU(s): 64-67,192-195
 NUMA node17 CPU(s): 68-71,196-199
 NUMA node18 CPU(s): 72-75,200-203
 NUMA node19 CPU(s): 76-79,204-207
 NUMA node20 CPU(s): 80-83,208-211
 NUMA node21 CPU(s): 84-87,212-215
 NUMA node22 CPU(s): 88-91,216-219
 NUMA node23 CPU(s): 92-95,220-223
 NUMA node24 CPU(s): 96-99,224-227
 NUMA node25 CPU(s): 100-103,228-231
 NUMA node26 CPU(s): 104-107,232-235
 NUMA node27 CPU(s): 108-111,236-239
 NUMA node28 CPU(s): 112-115,240-243
 NUMA node29 CPU(s): 116-119,244-247
 NUMA node30 CPU(s): 120-123,248-251
 NUMA node31 CPU(s): 124-127,252-255

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
 pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
 constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
 pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
 f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
 perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmcall
 fsgsbase bml avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
 clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
 flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
 rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

physical chip.
available: 32 nodes (0-31)
node 0 cpus: 0 1 2 3 128 129 130 131
node 0 size: 15676 MB
node 0 free: 15592 MB
node 1 cpus: 4 5 6 7 132 133 134 135
node 1 size: 16126 MB
node 1 free: 16065 MB
node 2 cpus: 8 9 10 11 136 137 138 139
node 2 size: 16096 MB
node 2 free: 16044 MB
node 3 cpus: 12 13 14 15 140 141 142 143
node 3 size: 16125 MB
node 3 free: 16071 MB
node 4 cpus: 16 17 18 19 144 145 146 147
node 4 size: 16126 MB
node 4 free: 16074 MB
node 5 cpus: 20 21 22 23 148 149 150 151
node 5 size: 16126 MB
node 5 free: 16079 MB
node 6 cpus: 24 25 26 27 152 153 154 155
node 6 size: 16126 MB
node 6 free: 16075 MB
node 7 cpus: 28 29 30 31 156 157 158 159
node 7 size: 16125 MB
node 7 free: 16072 MB
node 8 cpus: 32 33 34 35 160 161 162 163
node 8 size: 16126 MB
node 8 free: 16015 MB
node 9 cpus: 36 37 38 39 164 165 166 167
node 9 size: 16126 MB
node 9 free: 16053 MB
node 10 cpus: 40 41 42 43 168 169 170 171
node 10 size: 16126 MB
node 10 free: 16068 MB
node 11 cpus: 44 45 46 47 172 173 174 175
node 11 size: 16125 MB
node 11 free: 16050 MB
node 12 cpus: 48 49 50 51 176 177 178 179
node 12 size: 16126 MB
node 12 free: 16006 MB
node 13 cpus: 52 53 54 55 180 181 182 183
node 13 size: 16126 MB
node 13 free: 16035 MB
node 14 cpus: 56 57 58 59 184 185 186 187
node 14 size: 16126 MB
node 14 free: 16004 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 15 cpus: 60 61 62 63 188 189 190 191
node 15 size: 16113 MB
node 15 free: 16055 MB
node 16 cpus: 64 65 66 67 192 193 194 195
node 16 size: 16126 MB
node 16 free: 16077 MB
node 17 cpus: 68 69 70 71 196 197 198 199
node 17 size: 16126 MB
node 17 free: 16087 MB
node 18 cpus: 72 73 74 75 200 201 202 203
node 18 size: 16126 MB
node 18 free: 12127 MB
node 19 cpus: 76 77 78 79 204 205 206 207
node 19 size: 16125 MB
node 19 free: 16090 MB
node 20 cpus: 80 81 82 83 208 209 210 211
node 20 size: 16126 MB
node 20 free: 16085 MB
node 21 cpus: 84 85 86 87 212 213 214 215
node 21 size: 16126 MB
node 21 free: 16089 MB
node 22 cpus: 88 89 90 91 216 217 218 219
node 22 size: 16126 MB
node 22 free: 16086 MB
node 23 cpus: 92 93 94 95 220 221 222 223
node 23 size: 16125 MB
node 23 free: 16088 MB
node 24 cpus: 96 97 98 99 224 225 226 227
node 24 size: 16126 MB
node 24 free: 16085 MB
node 25 cpus: 100 101 102 103 228 229 230 231
node 25 size: 16126 MB
node 25 free: 16086 MB
node 26 cpus: 104 105 106 107 232 233 234 235
node 26 size: 16126 MB
node 26 free: 16088 MB
node 27 cpus: 108 109 110 111 236 237 238 239
node 27 size: 16125 MB
node 27 free: 16084 MB
node 28 cpus: 112 113 114 115 240 241 242 243
node 28 size: 16126 MB
node 28 free: 16082 MB
node 29 cpus: 116 117 118 119 244 245 246 247
node 29 size: 16126 MB
node 29 free: 16087 MB
node 30 cpus: 120 121 122 123 248 249 250 251
node 30 size: 16126 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 30 free: 16086 MB
node 31 cpus: 124 125 126 127 252 253 254 255
node 31 size: 16122 MB
node 31 free: 16081 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 10 11 11 11 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 11 10 11 11 11 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
12: 12 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
13: 12 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
14: 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
15: 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11
12 12 12 12 12 12 12 12 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11
12 12 12 12 12 12 12 12 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11
12 12 12 12 12 12 12 12 12 12 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10
12 12 12 12 12 12 12 12 12 12 12 12

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12
25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12
26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12
27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12
28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12
29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12
30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12
31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12

```

From /proc/meminfo

```

MemTotal:      527914260 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

uname -a:

```

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault): Not affected
 Microarchitectural Data Sampling: Not affected
 CVE-2017-5754 (Meltdown): Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Dec 5 05:21 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	150G	3.8G	147G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 1.2.7 12/05/2019
 Vendor: Dell Inc.
 Product: PowerEdge R7525
 Product Family: PowerEdge
 Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
 1x 802C80B3802C 36ASF4G72PZ-3G2E7 32 GB 2 rank 3200
 2x 802C8632802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
 1x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
 9x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
 16x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
 AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
 Target: i386-unknown-linux-gnu
 Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Compiler Version Notes (Continued)

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C          | 502.gcc_r(peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++       | 523.xalancbmk_r(peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
=====

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

```
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

=====
C++ | 523.xalancbmk_r(peak)

```
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

```
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

=====
Fortran | 548.exchange2_r(base, peak)

```
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 655

PowerEdge R7525 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_int_peak = 719

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-05 12:36:51-0500.

Report generated on 2019-12-26 11:34:54 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.