



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

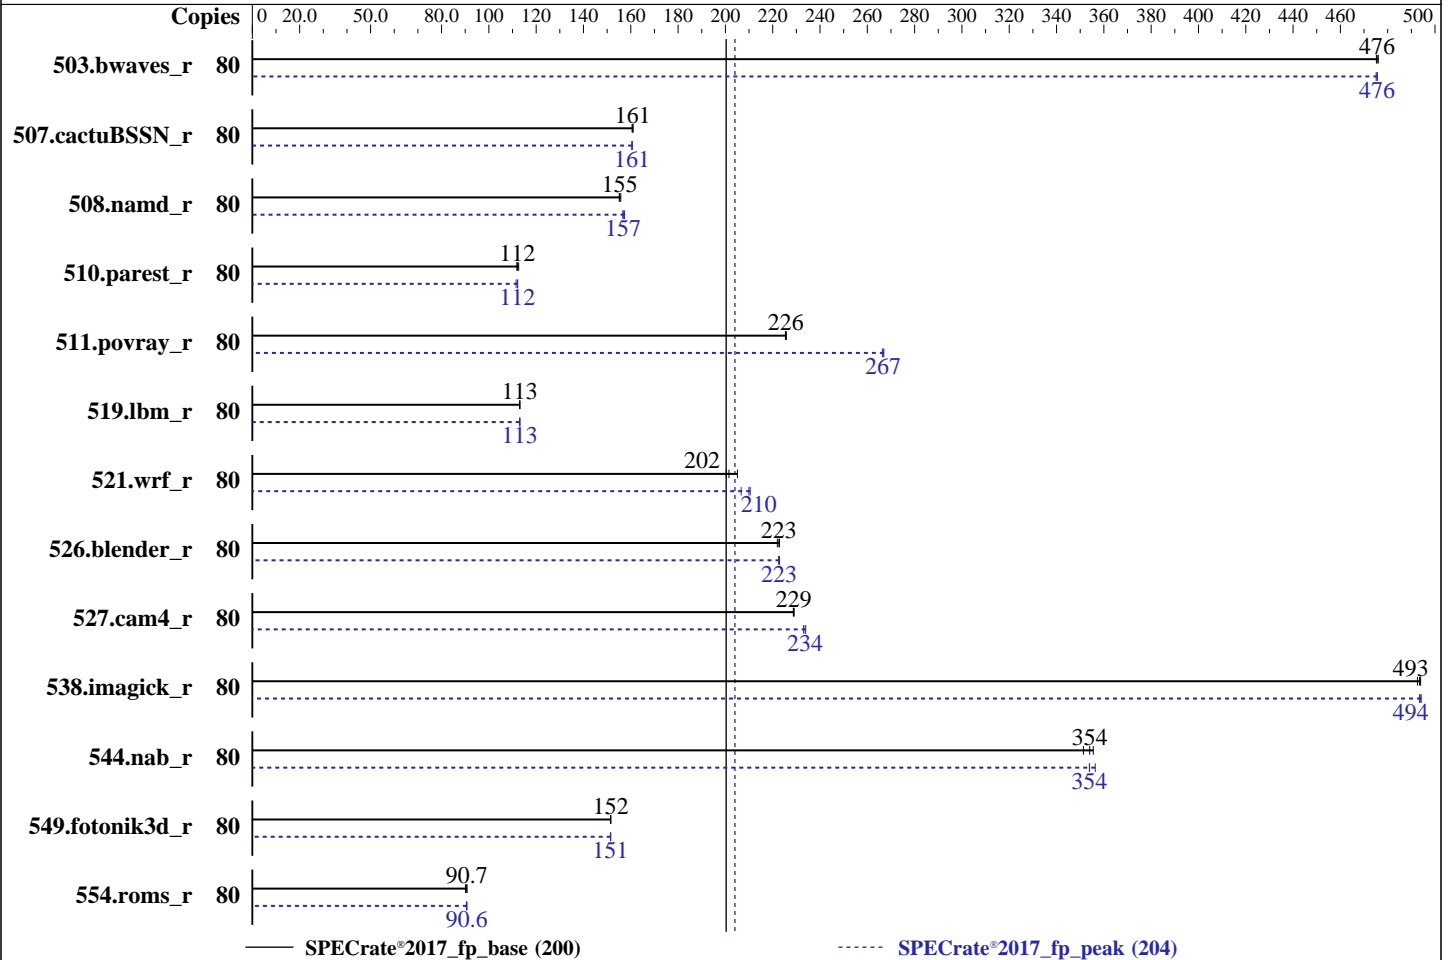

Hardware

CPU Name: Intel Xeon Gold 5218R
 Max MHz: 4000
 Nominal: 2100
 Enabled: 40 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933V-R, running at 2666)
 Storage: 1 x 240 GB SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) 4.12.14-23-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.4b released Apr-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Mar-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1685	476	1687	476	1688	475	80	1687	476	1689	475	1687	476
507.cactuBSSN_r	80	629	161	629	161	631	161	80	631	161	631	161	631	161
508.namd_r	80	489	155	488	156	490	155	80	485	157	485	157	483	157
510.parest_r	80	1858	113	1868	112	1871	112	80	1877	112	1866	112	1866	112
511.povray_r	80	828	226	829	225	827	226	80	701	267	700	267	701	266
519.lbm_r	80	746	113	746	113	746	113	80	746	113	746	113	746	113
521.wrf_r	80	889	202	894	200	874	205	80	851	210	867	207	854	210
526.blender_r	80	547	223	547	223	549	222	80	548	222	547	223	547	223
527.cam4_r	80	612	229	611	229	611	229	80	598	234	599	234	601	233
538.imagick_r	80	403	493	403	494	404	493	80	403	493	403	494	403	494
544.nab_r	80	379	356	383	351	380	354	80	380	354	380	354	378	356
549.fotonik3d_r	80	2057	152	2057	152	2059	151	80	2058	151	2059	151	2058	152
554.roms_r	80	1401	90.8	1411	90.1	1402	90.7	80	1403	90.6	1401	90.7	1405	90.5

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-bo6o Sat Mar 14 23:11:49 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

Thread(s) per core: 2

Core(s) per socket: 20

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Mar-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Platform Notes (Continued)

```

CPU family:          6
Model:              85
Model name:        Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
Stepping:          7
CPU MHz:           2100.000
CPU max MHz:       4000.0000
CPU min MHz:       800.0000
BogoMIPS:          4200.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpeltb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 192090 MB
node 0 free: 179940 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 193521 MB
node 1 free: 184788 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 193521 MB
node 2 free: 185162 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 193490 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Mar-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Platform Notes (Continued)

```
node 3 free: 185084 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10
```

```
From /proc/meminfo
MemTotal:          791167672 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux linux-bo6o 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          No status reported
Microarchitectural Data Sampling:          No status reported
CVE-2017-5754 (Meltdown):                   Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):          Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Indirect Branch Restricted
                                              Speculation, IBPB, IBRS_FW
```

```
run-level 3 Mar 14 13:25
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdb1       btrfs    224G      41G  183G  19% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:          Cisco Systems, Inc. B200M5.4.0.4b.0.0407191258 04/07/2019
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Platform Notes (Continued)

Vendor: Cisco Systems Inc
Product: UCSB-B200-M5
Serial: FCH21437LAT

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R,
2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R,
2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R, 2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Peak Optimization Flags (Continued)

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5218R,
2.10GHz)

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = 204

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.2020-04-17.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.2020-04-17.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-15 02:11:48-0400.

Report generated on 2020-04-17 11:23:49 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-17.