



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55


Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

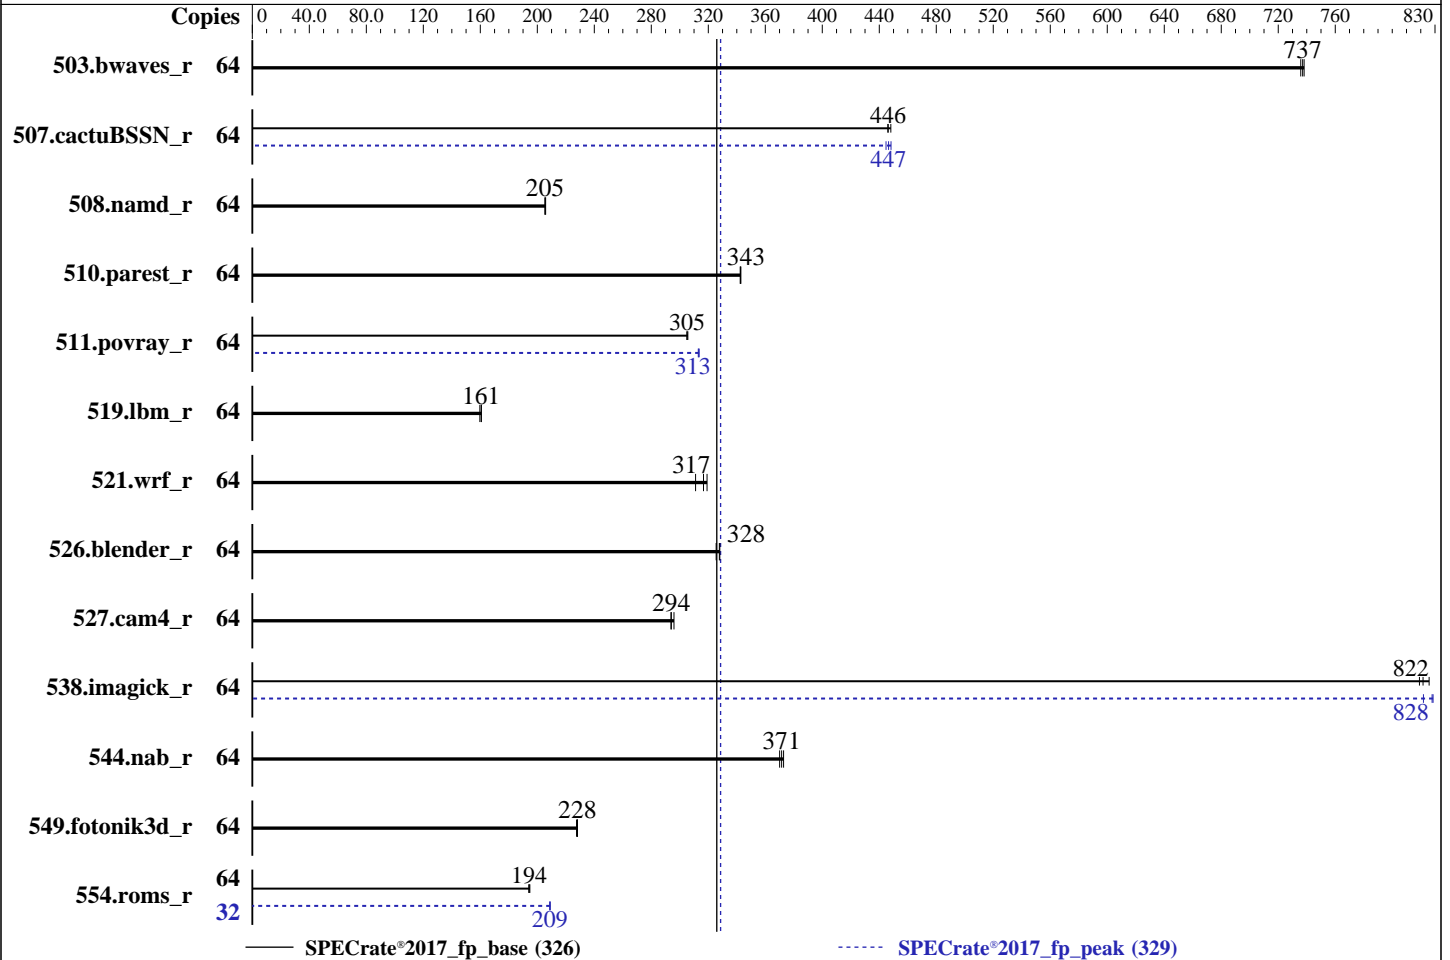

Hardware

CPU Name: AMD EPYC 7F52
 Max MHz: 3900
 Nominal: 3500
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB per core
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 kernel 4.12.14-197.7-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.2.4 released Dec-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	872	736	871	737	869	738	64	872	736	871	737	869	738
507.cactuBSSN_r	64	182	446	182	446	181	448	64	181	448	181	447	182	445
508.namd_r	64	296	205	296	205	295	206	64	296	205	296	205	295	206
510.parest_r	64	489	342	489	343	488	343	64	489	342	489	343	488	343
511.povray_r	64	490	305	490	305	489	306	64	477	314	477	313	477	313
519.lbm_r	64	422	160	420	161	420	161	64	422	160	420	161	420	161
521.wrf_r	64	453	317	449	319	461	311	64	453	317	449	319	461	311
526.blender_r	64	299	326	297	328	297	328	64	299	326	297	328	297	328
527.cam4_r	64	381	294	381	294	378	296	64	381	294	381	294	378	296
538.imagick_r	64	194	819	193	826	194	822	64	192	828	194	822	192	829
544.nab_r	64	290	371	291	370	289	373	64	290	371	291	370	289	373
549.fotonik3d_r	64	1093	228	1096	228	1093	228	64	1093	228	1096	228	1093	228
554.roms_r	64	522	195	523	194	524	194	32	243	209	243	209	244	209

SPECrate®2017_fp_base = **326**

SPECrate®2017_fp_peak = **329**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/root/cpu2017-1.1.0/amd_rate_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0/  
    amd_rate_aocc200_rome_C_lib/32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Cstates set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

Efficiency Optimized Mode Disabled
Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on suse15-spl Wed Jan 1 20:35:31 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7F52 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
physical 1: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 32
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7F52 16-Core Processor
Stepping: 0
CPU MHz: 3493.517
BogoMIPS: 6987.03
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0,32
NUMA node1 CPU(s): 1,33
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

NUMA node2 CPU(s): 2,34
NUMA node3 CPU(s): 3,35
NUMA node4 CPU(s): 4,36
NUMA node5 CPU(s): 5,37
NUMA node6 CPU(s): 6,38
NUMA node7 CPU(s): 7,39
NUMA node8 CPU(s): 8,40
NUMA node9 CPU(s): 9,41
NUMA node10 CPU(s): 10,42
NUMA node11 CPU(s): 11,43
NUMA node12 CPU(s): 12,44
NUMA node13 CPU(s): 13,45
NUMA node14 CPU(s): 14,46
NUMA node15 CPU(s): 15,47
NUMA node16 CPU(s): 16,48
NUMA node17 CPU(s): 17,49
NUMA node18 CPU(s): 18,50
NUMA node19 CPU(s): 19,51
NUMA node20 CPU(s): 20,52
NUMA node21 CPU(s): 21,53
NUMA node22 CPU(s): 22,54
NUMA node23 CPU(s): 23,55
NUMA node24 CPU(s): 24,56
NUMA node25 CPU(s): 25,57
NUMA node26 CPU(s): 26,58
NUMA node27 CPU(s): 27,59
NUMA node28 CPU(s): 28,60
NUMA node29 CPU(s): 29,61
NUMA node30 CPU(s): 30,62
NUMA node31 CPU(s): 31,63

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

available: 32 nodes (0-31)
node 0 cpus: 0 32
node 0 size: 15677 MB
node 0 free: 15580 MB
node 1 cpus: 1 33
node 1 size: 16127 MB
node 1 free: 16049 MB
node 2 cpus: 2 34
node 2 size: 16127 MB
node 2 free: 16041 MB
node 3 cpus: 3 35
node 3 size: 16126 MB
node 3 free: 16045 MB
node 4 cpus: 4 36
node 4 size: 16127 MB
node 4 free: 16046 MB
node 5 cpus: 5 37
node 5 size: 16127 MB
node 5 free: 16046 MB
node 6 cpus: 6 38
node 6 size: 16127 MB
node 6 free: 16047 MB
node 7 cpus: 7 39
node 7 size: 16126 MB
node 7 free: 16021 MB
node 8 cpus: 8 40
node 8 size: 16127 MB
node 8 free: 16046 MB
node 9 cpus: 9 41
node 9 size: 16127 MB
node 9 free: 16047 MB
node 10 cpus: 10 42
node 10 size: 16127 MB
node 10 free: 16044 MB
node 11 cpus: 11 43
node 11 size: 16126 MB
node 11 free: 16045 MB
node 12 cpus: 12 44
node 12 size: 16127 MB
node 12 free: 16042 MB
node 13 cpus: 13 45
node 13 size: 16127 MB
node 13 free: 16031 MB
node 14 cpus: 14 46
node 14 size: 16127 MB
node 14 free: 16040 MB
node 15 cpus: 15 47

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```
node 15 size: 16114 MB
node 15 free: 16029 MB
node 16 cpus: 16 48
node 16 size: 16127 MB
node 16 free: 16046 MB
node 17 cpus: 17 49
node 17 size: 16127 MB
node 17 free: 16046 MB
node 18 cpus: 18 50
node 18 size: 16127 MB
node 18 free: 16047 MB
node 19 cpus: 19 51
node 19 size: 16126 MB
node 19 free: 16048 MB
node 20 cpus: 20 52
node 20 size: 16127 MB
node 20 free: 16047 MB
node 21 cpus: 21 53
node 21 size: 16127 MB
node 21 free: 16042 MB
node 22 cpus: 22 54
node 22 size: 16127 MB
node 22 free: 16047 MB
node 23 cpus: 23 55
node 23 size: 16126 MB
node 23 free: 16048 MB
node 24 cpus: 24 56
node 24 size: 16127 MB
node 24 free: 16047 MB
node 25 cpus: 25 57
node 25 size: 16127 MB
node 25 free: 16048 MB
node 26 cpus: 26 58
node 26 size: 16127 MB
node 26 free: 16048 MB
node 27 cpus: 27 59
node 27 size: 16126 MB
node 27 free: 16045 MB
node 28 cpus: 28 60
node 28 size: 16127 MB
node 28 free: 16047 MB
node 29 cpus: 29 61
node 29 size: 16098 MB
node 29 free: 16010 MB
node 30 cpus: 30 62
node 30 size: 16127 MB
node 30 free: 16045 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

Platform Notes (Continued)

```

node 31 cpus: 31 63
node 31 size: 16125 MB
node 31 free: 16043 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
32 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
12: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32
13: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32
14: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32
15: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11
12 12 12 12 12 12 12 12 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11
12 12 12 12 12 12 12 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11
12 12 12 12 12 12 12 12 12 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10
12 12 12 12 12 12 12 12 12 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

10  11  11  11  12  12  12  12  12  12  12  12
21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  10  11  11  12  12  12  12  12  12  12  12
22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  10  11  12  12  12  12  12  12  12  12
23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  11  10  12  12  12  12  12  12  12  12
24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  10  11  11  11  12  12  12  12
25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  10  11  11  12  12  12  12
26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  10  11  12  12  12  12
27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  11  10  12  12  12  12
28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  10  11  11  11
29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  10  11  11
30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  11  10  11
31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  11  11  10

```

```

From /proc/meminfo
MemTotal:      527952040 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux suse15-sp1 4.12.14-197.7-default #1 SMP Mon Jun 24 08:33:54 UTC 2019 (650fd32)
x86_64 x86_64 x86_64 GNU/Linux

```

```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):      Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

Microarchitectural Data Sampling: Not affected
 CVE-2017-5754 (Meltdown): Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Nov 26 14:00

SPEC is set to: /root/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	444G	13G	432G	3%	/

From /sys/devices/virtual/dmi/id
 BIOS: Dell Inc. 1.2.4 12/03/2019
 Vendor: Dell Inc.
 Product: PowerEdge C6525
 Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
C++, C, Fortran | 507.cactuBSSN_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```

AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang

```

C++ benchmarks:

```

-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang

```

Fortran benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

```
538.imagick_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

544.nab_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 326

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECrate®2017_fp_peak = 329

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```

-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2018-01-01 21:35:31-0500.

Report generated on 2020-04-14 14:09:46 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.