



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)


SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

CPU2017 License: 55  
Test Sponsor: Dell Inc  
Tested by: Dell Inc.

Test Date: Sep-2020  
Hardware Availability: Jul-2020  
Software Availability: Apr-2020

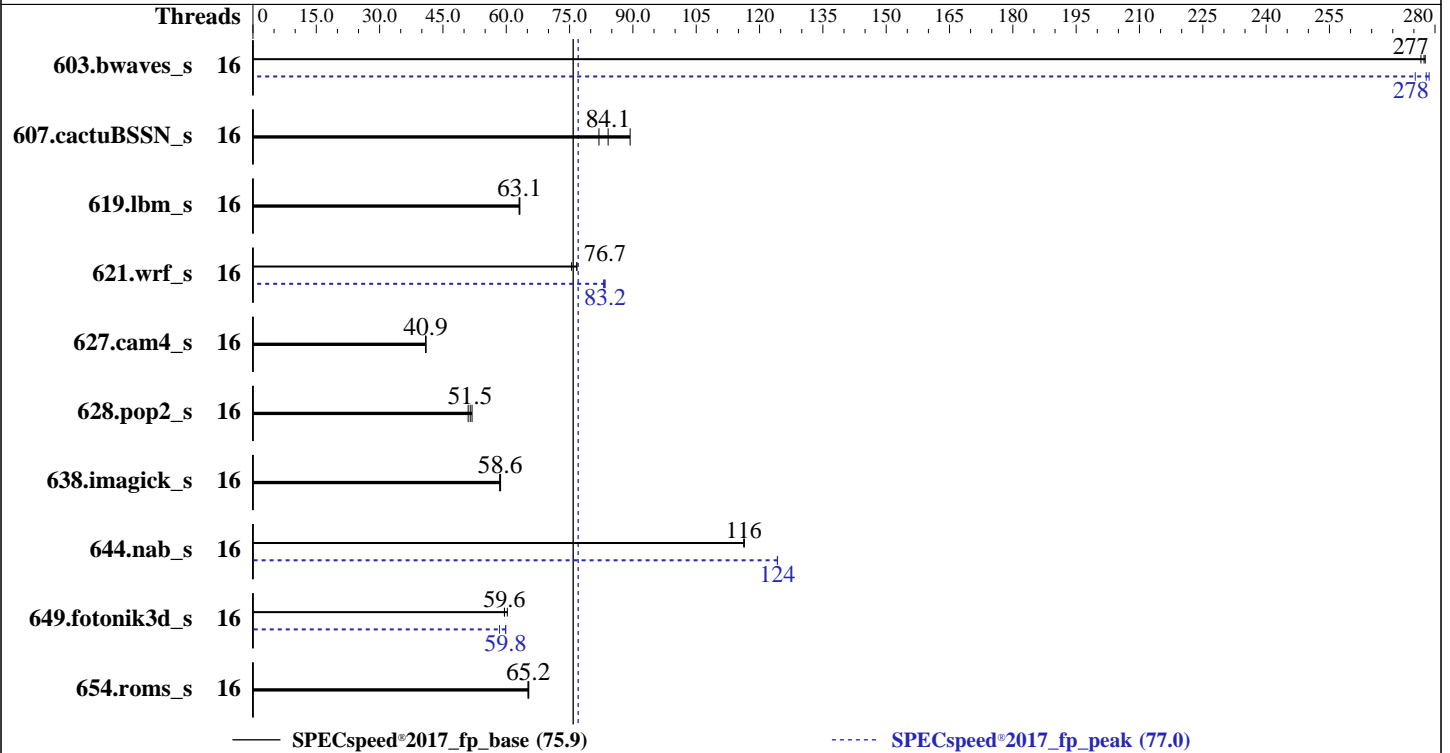

### Hardware

CPU Name: Intel Xeon Silver 4215R  
Max MHz: 4000  
Nominal: 3200  
Enabled: 16 cores, 2 chips  
Orderable: 1, 2  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 11 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-3200AA-R, running at 2400)  
Storage: 1 x 1.92TB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux 8.1  
kernel 4.18.0-147.el8.x86\_64  
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Version 2.8.1 released Jun-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

CPU2017 License: 55  
Test Sponsor: Dell Inc  
Tested by: Dell Inc.

Test Date: Sep-2020  
Hardware Availability: Jul-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	212	278	<b>213</b>	<b>277</b>	213	277	16	212	279	<b>212</b>	<b>278</b>	214	275
607.cactuBSSN_s	16	187	89.3	203	82.0	<b>198</b>	<b>84.1</b>	16	187	89.3	203	82.0	<b>198</b>	<b>84.1</b>
619.lbm_s	16	83.1	63.0	82.8	63.2	<b>83.0</b>	<b>63.1</b>	16	83.1	63.0	82.8	63.2	<b>83.0</b>	<b>63.1</b>
621.wrf_s	16	<b>172</b>	<b>76.7</b>	172	76.7	175	75.4	16	<b>159</b>	<b>83.2</b>	159	83.1	159	83.4
627.cam4_s	16	217	40.9	216	41.0	<b>217</b>	<b>40.9</b>	16	217	40.9	216	41.0	<b>217</b>	<b>40.9</b>
628.pop2_s	16	229	51.9	233	51.0	<b>231</b>	<b>51.5</b>	16	229	51.9	233	51.0	<b>231</b>	<b>51.5</b>
638.imagick_s	16	<b>246</b>	<b>58.6</b>	247	58.4	246	58.7	16	<b>246</b>	<b>58.6</b>	247	58.4	246	58.7
644.nab_s	16	150	116	<b>150</b>	<b>116</b>	150	116	16	141	124	<b>141</b>	<b>124</b>	141	124
649.fotonik3d_s	16	153	59.6	151	60.3	<b>153</b>	<b>59.6</b>	16	<b>152</b>	<b>59.8</b>	156	58.4	152	59.9
654.roms_s	16	242	65.2	<b>241</b>	<b>65.2</b>	241	65.3	16	242	65.2	<b>241</b>	<b>65.2</b>	241	65.3

SPECspeed®2017\_fp\_base = **75.9**

SPECspeed®2017\_fp\_peak = **77.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub set to standard  
Logical Processor disabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
UPI Prefetch enabled  
LLC Prefetch disabled  
Dead Line LLC Alloc enabled  
Directory AtoS disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Thu Sep 24 08:24:31 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4215R CPU @ 3.20GHz  
2 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 8  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):               16
On-line CPU(s) list: 0-15
Thread(s) per core:  1
Core(s) per socket:  8
Socket(s):            2
NUMA node(s):        2
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Silver 4215R CPU @ 3.20GHz
Stepping:             7
CPU MHz:              3403.529
CPU max MHz:          4000.0000
CPU min MHz:          1000.0000
BogoMIPS:             6400.00
Virtualization:      VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             11264K
NUMA node0 CPU(s):   0,2,4,6,8,10,12,14
NUMA node1 CPU(s):   1,3,5,7,9,11,13,15
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14
node 0 size: 192050 MB
node 0 free: 191278 MB
node 1 cpus: 1 3 5 7 9 11 13 15
node 1 size: 193533 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECSpeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECSpeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

```
node 1 free: 185686 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

```
From /proc/meminfo
MemTotal:      394838340 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

### Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

```
run-level 3 Sep 24 03:49 last=5
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  1.7T   29G  1.7T   2% /home
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

From /sys/devices/virtual/dmi/id  
BIOS: Dell Inc. 2.8.1 06/30/2020  
Vendor: Dell Inc.  
Product: PowerEdge R440  
Product Family: PowerEdge  
Serial: F9TD613

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x 002C069D002C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200  
4x Not Specified Not Specified

(End of data from sysinfo program)  
Memory running at 2400

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
628.pop2\_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Base Portability Flags (Continued)

649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC\_SUPPRESS\_OPENMP -DSPEC\_OPENMP -ipo -xCORE-AVX2  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)  
-prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)

SPECspeed®2017\_fp\_base = 75.9

PowerEdge R540 (Intel Xeon Silver 4215R 3.2 GHz)

SPECspeed®2017\_fp\_peak = 77.0

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Jul-2020  
**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-24 09:24:31-0400.  
Report generated on 2020-10-14 09:22:26 by CPU2017 PDF formatter v6255.  
Originally published on 2020-10-13.