



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177


Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

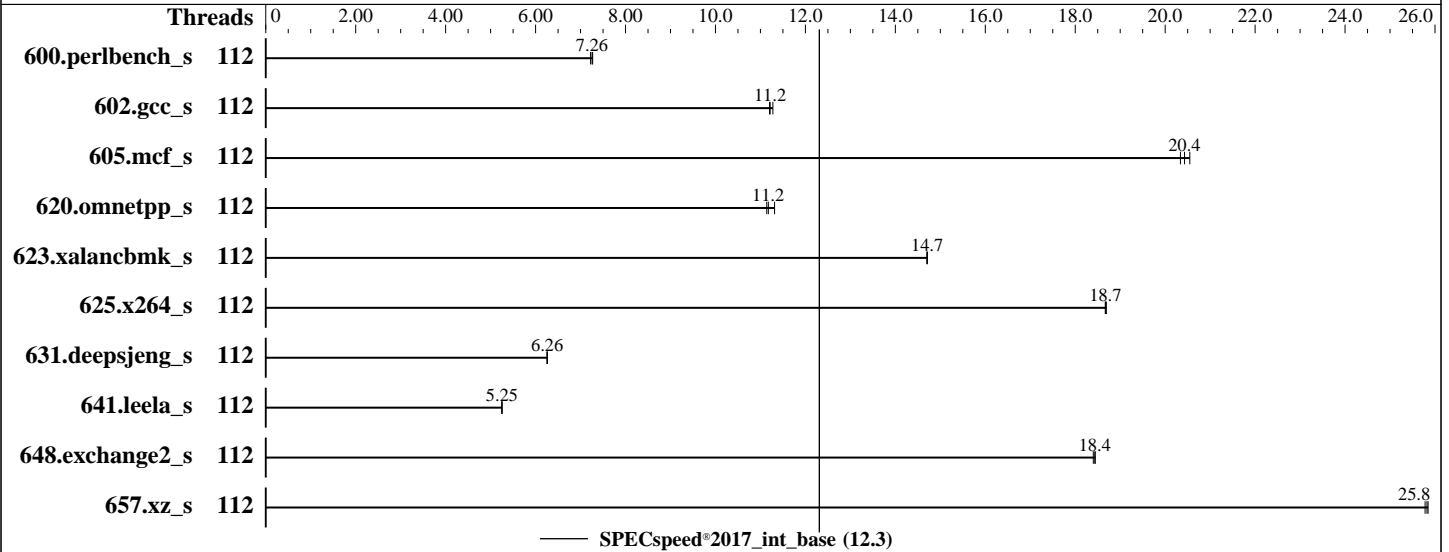

Hardware

CPU Name: Intel Xeon Platinum 8376HL
 Max MHz: 4300
 Nominal: 2600
 Enabled: 112 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
 Storage: 1 x 3.84 TB SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2(x86_64)
 Kernel 5.3.18-22-default
 Compiler: C/C++: Version 2021.2.0 of Intel oneAPI
 DPC++/C++ Compiler
 Build 20210317 for Linux;
 Fortran: Version 2021.2.0 of Intel Fortran
 Compiler Classic Build 20210228 for Linux;
 C/C++: Version 2021.2.0 of Intel C/C++ Compiler
 Classic Build 20210228 for Linux;
 Parallel: Yes
 Firmware: Version 0.67 released Mar-2021
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	244	7.27	<u>245</u>	<u>7.26</u>	246	7.22							
602.gcc_s	112	<u>355</u>	<u>11.2</u>	353	11.3	355	11.2							
605.mcf_s	112	<u>231</u>	<u>20.4</u>	230	20.5	232	20.3							
620.omnetpp_s	112	<u>146</u>	<u>11.2</u>	144	11.3	146	11.1							
623.xalancbmk_s	112	96.3	14.7	96.4	14.7	<u>96.3</u>	<u>14.7</u>							
625.x264_s	112	94.5	18.7	<u>94.5</u>	<u>18.7</u>	94.4	18.7							
631.deepsjeng_s	112	229	6.26	<u>229</u>	<u>6.26</u>	229	6.26							
641.leela_s	112	<u>325</u>	<u>5.25</u>	325	5.25	325	5.25							
648.exchange2_s	112	159	18.4	<u>159</u>	<u>18.4</u>	160	18.4							
657.xz_s	112	239	25.8	240	25.8	<u>239</u>	<u>25.8</u>							

SPECspeed®2017_int_base = 12.3

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to powersave

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/opt/intel/oneapi/compiler/2021.2.0/linux/compiler/lib/intel64:/usr/local/jemalloc64-5.0.1"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Policy Set to Load Balance
Hyper-Threading Set to Disable
XPT Prefetch Set to Enabled

Sysinfo program /home/spec2017115/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost Sun Apr 25 17:19:42 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
 4 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 48 bits virtual
CPU(s): 112
On-line CPU(s) list: 0-111
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s): 4
NUMA node(s): 4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei
(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Date: Apr-2021

Test Sponsor: China Academy of Information and Communications Technology

Hardware Availability: Nov-2020

Tested by: China Academy of Information and Communications Technology

Software Availability: Mar-2021

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8376HL CPU @ 2.60GHz
Stepping:           11
CPU MHz:            1011.004
CPU max MHz:        4300.0000
CPU min MHz:        1000.0000
BogoMIPS:           5200.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 385604 MB
node 0 free: 385036 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 387031 MB
node 1 free: 386149 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 387065 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

Platform Notes (Continued)

```

node 2 free: 386626 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 386776 MB
node 3 free: 386171 MB
node distances:
node 0 1 2 3
0: 10 20 20 20
1: 20 10 20 20
2: 20 20 10 20
3: 20 20 20 10

```

From /proc/meminfo

```

MemTotal: 1583593264 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has powersave

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"

```

uname -a:

```

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Apr 25 16:05

SPEC is set to: /home/spec2017115

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfst	2.2T	76G	2.1T	4%	/home

From /sys/devices/virtual/dmi/id

```
Vendor:      Huawei
Product:     2488H V6
Product Family: Cedar Island
Serial:      Huawei
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200

BIOS:

```
BIOS Vendor:   ByoSoft
BIOS Version:  0.67
BIOS Date:     03/23/2021
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)  
      | 625.x264_s(base) 657.xz_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.2.0 Build 20210317  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++   | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)  
     | 641.leela_s(base)  
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei
(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Date: Apr-2021

Test Sponsor: China Academy of Information and Communications Technology

Hardware Availability: Nov-2020

Tested by: China Academy of Information and Communications Technology

Software Availability: Mar-2021

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.2.0 Build 20210317
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.2.0 Build 20210228_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX2

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECspeed®2017_int_base = 12.3

Huawei 2488H V6 (Intel Xeon Platinum 8376HL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Apr-2021

Hardware Availability: Nov-2020

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/ -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.2.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revC.html

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.3.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revC.xml

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-25 05:19:41-0400.

Report generated on 2021-05-12 13:43:24 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.