



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

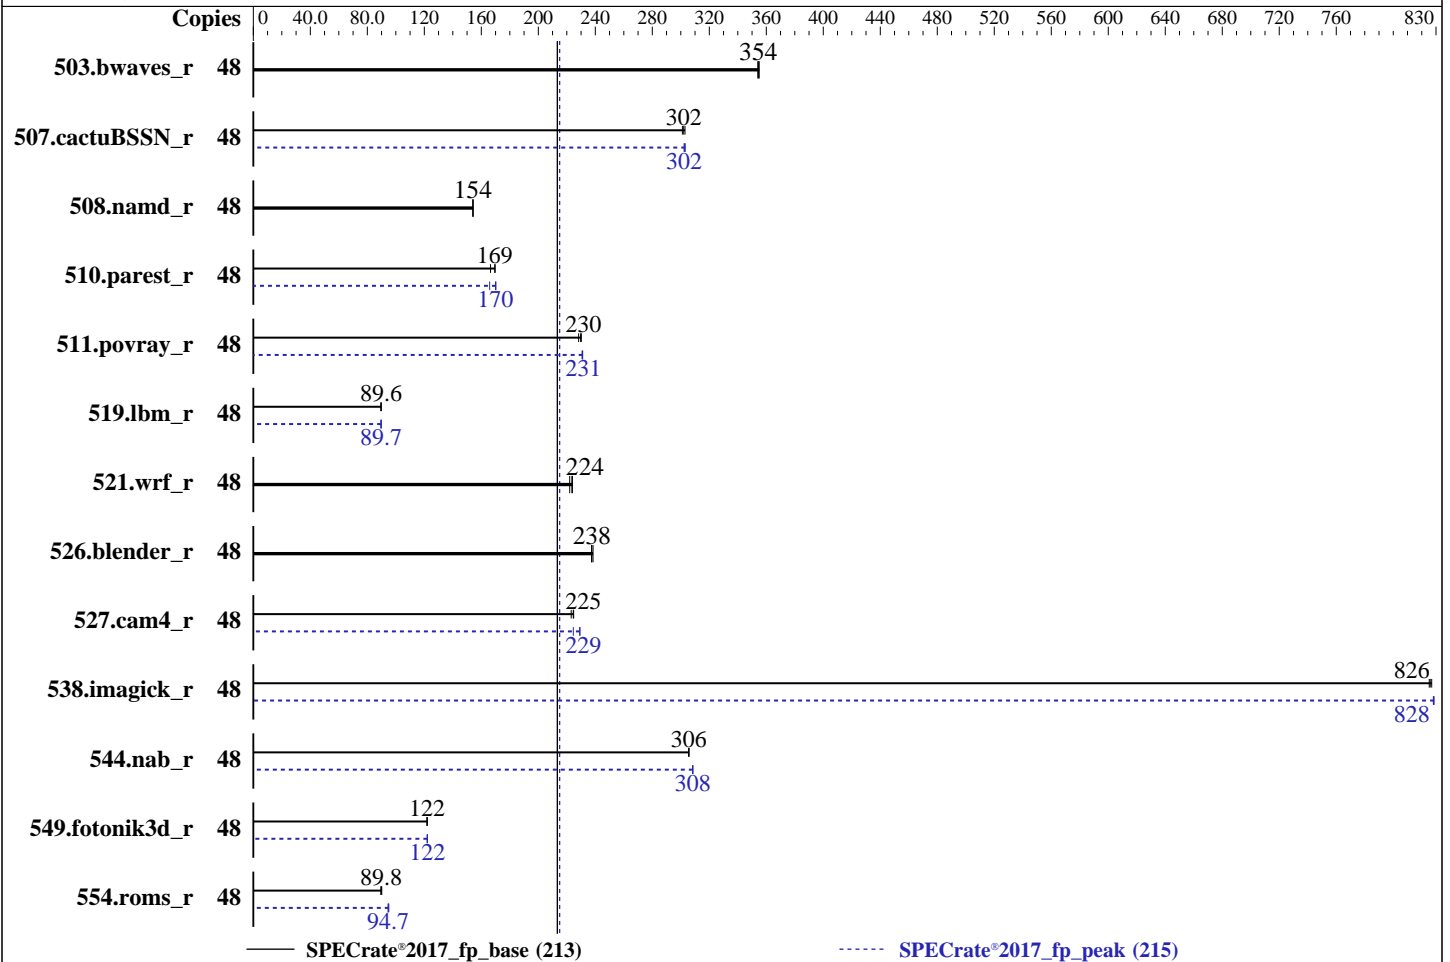

Hardware

CPU Name: AMD EPYC 7443P
 Max MHz: 4000
 Nominal: 2850
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
 Other: None
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 480 GB SAS SSD, RAID 0
 Other: None

Software

OS: Ubuntu 20.04.1 LTS (x86_64)
 Kernel 5.4.0-56-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version A43 v2.42 04/15/2021 released Apr-2021
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1356	355	1360	354	<u>1358</u>	<u>354</u>	48	1356	355	1360	354	<u>1358</u>	<u>354</u>
507.cactuBSSN_r	48	202	301	201	303	<u>201</u>	<u>302</u>	48	<u>201</u>	<u>302</u>	201	302	200	303
508.namd_r	48	296	154	296	154	<u>296</u>	<u>154</u>	48	296	154	296	154	<u>296</u>	<u>154</u>
510.parest_r	48	<u>741</u>	<u>169</u>	754	166	740	170	48	737	170	<u>739</u>	<u>170</u>	757	166
511.povray_r	48	<u>488</u>	<u>230</u>	487	230	491	228	48	486	231	<u>485</u>	<u>231</u>	485	231
519.lbm_r	48	<u>564</u>	<u>89.6</u>	564	89.7	565	89.6	48	564	89.7	<u>564</u>	<u>89.7</u>	564	89.6
521.wrf_r	48	480	224	<u>481</u>	<u>224</u>	484	222	48	480	224	<u>481</u>	<u>224</u>	484	222
526.blender_r	48	307	238	<u>308</u>	<u>238</u>	308	237	48	307	238	<u>308</u>	<u>238</u>	308	237
527.cam4_r	48	376	223	373	225	<u>374</u>	<u>225</u>	48	<u>366</u>	<u>229</u>	366	229	374	225
538.imagick_r	48	144	827	145	825	<u>145</u>	<u>826</u>	48	<u>144</u>	<u>828</u>	144	829	144	828
544.nab_r	48	<u>264</u>	<u>306</u>	264	305	264	306	48	262	308	262	308	<u>262</u>	<u>308</u>
549.fotonik3d_r	48	<u>1533</u>	<u>122</u>	1533	122	1534	122	48	1533	122	<u>1532</u>	<u>122</u>	1531	122
554.roms_r	48	846	90.1	852	89.5	<u>850</u>	<u>89.8</u>	48	802	95.1	<u>805</u>	<u>94.7</u>	806	94.6

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/SPEC_CPU2017/cpu2017/amd_rate_aocc300_milan_A_lib/64:/home/SPEC_C
PU2017/cpu2017/amd_rate_aocc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>

Submitted: Mon May 24 12:35:35 EDT 2021

Submission: cpu2017-20210524-26413.sub

Platform Notes

BIOS Configuration
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
Thermal Configuration set to Maximum Cooling
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

NUMA memory domains per socket set to Four memory domains per socket
Data Fabric C-State Enable set to Force Enabled
Workload Profile set to Custom
L1 HW Prefetcher set to Disabled

Sysinfo program /home/SPEC_CPU2017/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on admin Wed Apr 1 17:39:22 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7443P 24-Core Processor
1 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7443P 24-Core Processor
Stepping: 1
CPU MHz: 1794.354
BogoMIPS: 5689.27
Virtualization: AMD-V
L1d cache: 768 KiB
L1i cache: 768 KiB
L2 cache: 12 MiB
L3 cache: 128 MiB
NUMA node0 CPU(s): 0-5,24-29

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

NUMA node1 CPU(s):          6-11,30-35
NUMA node2 CPU(s):          12-17,36-41
NUMA node3 CPU(s):          18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 257797 MB
node 0 free: 257199 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 258020 MB
node 1 free: 257655 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 258044 MB
node 2 free: 257748 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 258032 MB
node 3 free: 257721 MB
node distances:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

From /proc/meminfo

MemTotal: 1056660676 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS

From /etc/*release* /etc/*version*

debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.1 LTS (Focal Fossa)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.1 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

uname -a:

Linux admin 5.4.0-56-generic #62-Ubuntu SMP Mon Nov 23 19:20:19 UTC 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

run-level 5 Apr 1 17:23

SPEC is set to: /home/SPEC_CPU2017/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	83G	104G	45%	/

From /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant DL345 Gen10 Plus
Product Family: ProLiant
Serial: J20APP000K

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200
8x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE
BIOS Version: A43
BIOS Date: 04/15/2021
BIOS Revision: 2.42
Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus

(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-fininline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti

```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

544.nab_r (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.85 GHz, AMD EPYC 7443P)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = 215

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-inline-aggressive -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes  
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 13:39:21-0400.

Report generated on 2021-06-08 19:53:33 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.