



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Aug-2020

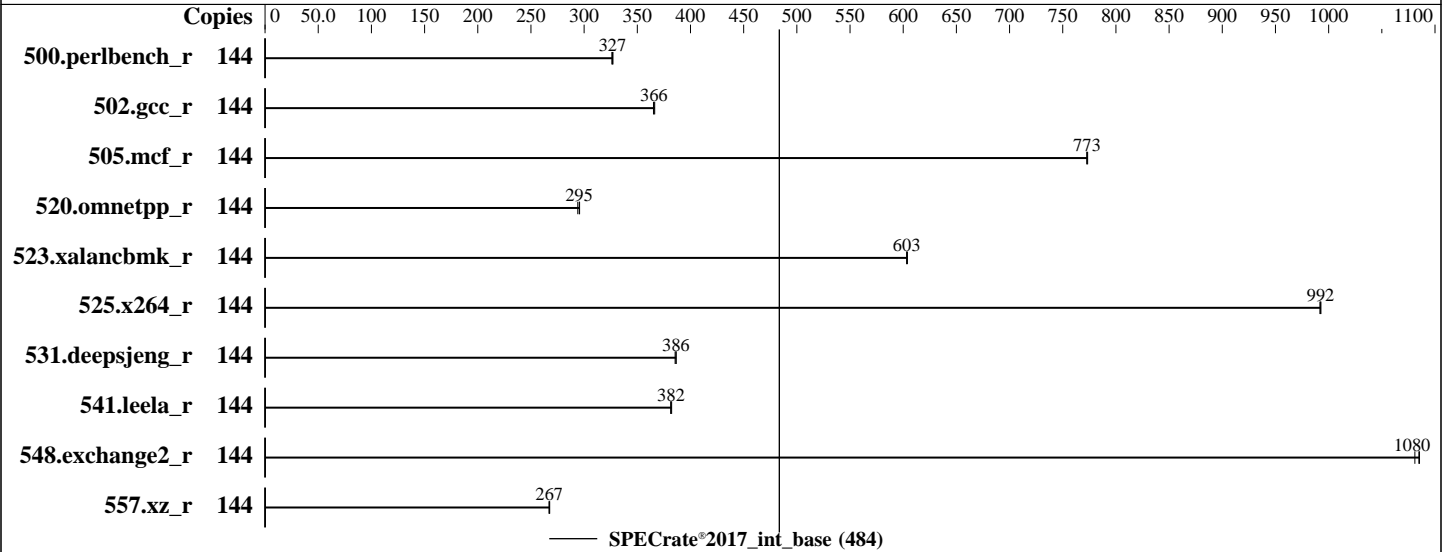

### Hardware

CPU Name: Intel Xeon Platinum 8360Y  
 Max MHz: 3500  
 Nominal: 2400  
 Enabled: 72 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 54 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x SATA M.2 SSD, 480GB  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.6.0 for D3891-A1x. Released Jun-2021 tested as V1.0.0.0 R1.2.0 for D3891-A1x Apr-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: May-2021  
Hardware Availability: Jun-2021  
Software Availability: Aug-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	701	327	703	326	<u>702</u>	<u>327</u>							
502.gcc_r	144	558	365	557	366	<u>558</u>	<u>366</u>							
505.mcf_r	144	<b>301</b>	<b>773</b>	301	773	301	773							
520.omnetpp_r	144	643	294	<b>640</b>	<b>295</b>	639	296							
523.xalancbmk_r	144	252	604	252	603	<u>252</u>	<u>603</u>							
525.x264_r	144	254	993	254	992	<u>254</u>	<u>992</u>							
531.deepsjeng_r	144	428	386	<u>427</u>	<u>386</u>	427	386							
541.leela_r	144	625	381	624	382	<u>625</u>	<u>382</u>							
548.exchange2_r	144	348	1090	<u>348</u>	<u>1080</u>	349	1080							
557.xz_r	144	582	267	581	268	<u>582</u>	<u>267</u>							

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-143

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/PVT/speccpu-1.1.8/lib/intel64:/home/PVT/speccpu-1.1.8/lib/ia32:/home/PVT/speccpu-1.1.8/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Aug-2020

### General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled  
CPU ClE Support = Disabled  
Package C State Limit = C2  
UPI Link Frequency Select = 10.4 GT/s  
XPT Prefetch = Enabled  
LLC Prefetch = Enabled  
SNC = Enable SNC2  
UPI Prefetch = Disabled  
FAN Control = Full

sysinfo program /home/PVT/speccpu-1.1.8/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Wed May 12 12:39:27 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
 2 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 36
  siblings    : 72
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31 32 33 34 35
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31 32 33 34 35
```

From lscpu from util-linux 2.32.1:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: May-2021  
Hardware Availability: Jun-2021  
Software Availability: Aug-2020

### Platform Notes (Continued)

```

CPU(s): 144
On-line CPU(s) list: 0-143
Thread(s) per core: 2
Core(s) per socket: 36
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
Stepping: 6
CPU MHz: 3100.000
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 55296K
NUMA node0 CPU(s): 0-17,72-89
NUMA node1 CPU(s): 18-35,90-107
NUMA node2 CPU(s): 36-53,108-125
NUMA node3 CPU(s): 54-71,126-143
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 55296 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 72 73 74 75 76 77 78 79 80 81
82 83 84 85 86 87 88 89

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Aug-2020

### Platform Notes (Continued)

```

node 0 size: 257460 MB
node 0 free: 256512 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 90 91 92 93 94 95 96
97 98 99 100 101 102 103 104 105 106 107
node 1 size: 258039 MB
node 1 free: 257750 MB
node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125
node 2 size: 258039 MB
node 2 free: 257802 MB
node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 126 127 128 129 130
131 132 133 134 135 136 137 138 139 140 141 142 143
node 3 size: 258008 MB
node 3 free: 257756 MB
node distances:
node  0  1  2  3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

```

```

From /proc/meminfo
MemTotal:      1056306040 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

uname -a:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Aug-2020

### Platform Notes (Continued)

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 May 12 12:37

```
SPEC is set to: /home/PVT/speccpu-1.1.8
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   330G  101G  230G  31% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX2540 M6
Product Family: SERVER
Serial:          EWAAxxxxxx
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 32x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
```

```
BIOS:
 BIOS Vendor:    FUJITSU
 BIOS Version:   V1.0.0.0 R1.2.0 for D3891-A1x
 BIOS Date:     04/01/2021
 BIOS Revision:  1.2
 Firmware Revision: 3.20
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y, 2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Aug-2020

## Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
-----
```

Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

```
=====  
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
      | 541.leela_r(base)  
-----
```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

```
=====  
Fortran | 548.exchange2_r(base)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.2.275 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y,  
2.40GHz

SPECrate®2017\_int\_base = 484

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Aug-2020

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ICL-RevA.html>

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ICL-RevA.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)





# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Platinum 8360Y,  
2.40GHz

SPECrate<sup>®</sup>2017\_int\_base = 484

SPECrate<sup>®</sup>2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Aug-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.8 on 2021-05-12 12:39:27-0400.

Report generated on 2021-06-22 17:07:05 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-22.