



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019


Test Date: Oct-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

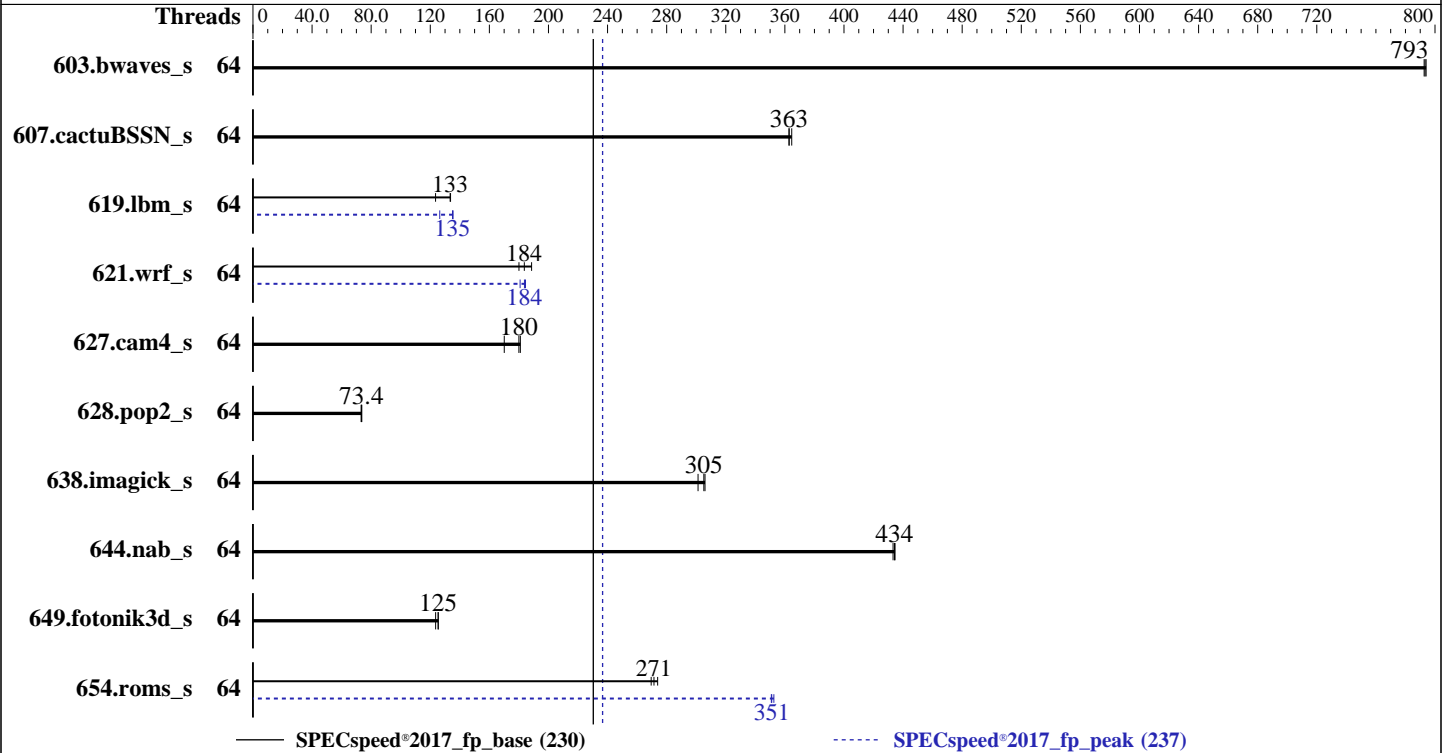

### Hardware

CPU Name: AMD EPYC 7543  
 Max MHz: 3700  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86\_64)  
 kernel version 5.3.18-57-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.2.1c released Aug-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	<b>74.4</b>	<b>793</b>	74.3	794	74.4	793	64	<b>74.4</b>	<b>793</b>	74.3	794	74.4	793
607.cactuBSSN_s	64	45.9	363	45.7	365	<b>45.9</b>	<b>363</b>	64	45.9	363	45.7	365	<b>45.9</b>	<b>363</b>
619.lbm_s	64	<b>39.3</b>	<b>133</b>	39.2	134	42.4	124	64	38.7	135	<b>38.8</b>	<b>135</b>	41.4	126
621.wrf_s	64	70.1	189	73.5	180	<b>72.0</b>	<b>184</b>	64	<b>72.0</b>	<b>184</b>	71.7	184	73.2	181
627.cam4_s	64	<b>49.2</b>	<b>180</b>	52.1	170	49.0	181	64	<b>49.2</b>	<b>180</b>	52.1	170	49.0	181
628.pop2_s	64	162	73.2	<b>162</b>	<b>73.4</b>	161	73.7	64	162	73.2	<b>162</b>	<b>73.4</b>	161	73.7
638.imagick_s	64	47.2	306	<b>47.3</b>	<b>305</b>	47.9	301	64	47.2	306	<b>47.3</b>	<b>305</b>	47.9	301
644.nab_s	64	40.2	435	<b>40.2</b>	<b>434</b>	40.3	433	64	40.2	435	<b>40.2</b>	<b>434</b>	40.3	433
649.fotonik3d_s	64	73.7	124	72.7	125	<b>72.7</b>	<b>125</b>	64	73.7	124	72.7	125	<b>72.7</b>	<b>125</b>
654.roms_s	64	58.4	270	<b>58.0</b>	<b>271</b>	57.5	274	64	<b>44.8</b>	<b>351</b>	44.7	353	44.9	351

SPECspeed®2017\_fp\_base = 230

SPECspeed®2017\_fp\_peak = 237

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Operating System Notes (Continued)

integer runs and all FP runs to enable Transparent Hugepages (THP).  
'cpupower frequency-set -g performance' run as root to set the scaling governor to performance.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_speed\_aocc300\_milan\_B\_lib/lib;/home/cpu2017/amd\_speed\_aocc300\_milan\_B\_lib/lib32:"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "592M"  
OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Platform Notes

### BIOS Configuration

SMT Mode set to Disabled  
 NUMA nodes per socket set to NPS1  
 ACPI SRAT L3 Cache As NUMA Domain set to Enabled  
 DRAM Scrub Time set to Disabled  
 Determinism Slider set to Power  
 L1 Stream HW Prefetcher set to Enabled  
 APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on localhost Mon Oct 11 04:46:02 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```

model name : AMD EPYC 7543 32-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

```

### From lscpu from util-linux 2.36.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:    1
Core(s) per socket:   32
Socket(s):             2
NUMA node(s):         16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7543 32-Core Processor
Stepping:              1

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Date: Oct-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

### Platform Notes (Continued)

```

Frequency boost:          enabled
CPU MHz:                  1973.771
CPU max MHz:              2800.0000
CPU min MHz:              1500.0000
BogoMIPS:                 5589.57
Virtualization:          AMD-V
L1d cache:                2 MiB
L1i cache:                2 MiB
L2 cache:                 32 MiB
L3 cache:                 512 MiB
NUMA node0 CPU(s):       0-3
NUMA node1 CPU(s):       4-7
NUMA node2 CPU(s):       8-11
NUMA node3 CPU(s):       12-15
NUMA node4 CPU(s):       16-19
NUMA node5 CPU(s):       20-23
NUMA node6 CPU(s):       24-27
NUMA node7 CPU(s):       28-31
NUMA node8 CPU(s):       32-35
NUMA node9 CPU(s):       36-39
NUMA node10 CPU(s):      40-43
NUMA node11 CPU(s):      44-47
NUMA node12 CPU(s):      48-51
NUMA node13 CPU(s):      52-55
NUMA node14 CPU(s):      56-59
NUMA node15 CPU(s):      60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Date: Oct-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

### Platform Notes (Continued)

cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr wbnoinvd amd\_ppin arat npt lbrv  
svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold v\_vmsave\_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov  
succor smca fsrm

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	512K	32M	8	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3
node 0 size: 128836 MB
node 0 free: 128659 MB
node 1 cpus: 4 5 6 7
node 1 size: 129022 MB
node 1 free: 128953 MB
node 2 cpus: 8 9 10 11
node 2 size: 129022 MB
node 2 free: 128951 MB
node 3 cpus: 12 13 14 15
node 3 size: 129022 MB
node 3 free: 128914 MB
node 4 cpus: 16 17 18 19
node 4 size: 129022 MB
node 4 free: 128905 MB
node 5 cpus: 20 21 22 23
node 5 size: 129022 MB
node 5 free: 128941 MB
node 6 cpus: 24 25 26 27
node 6 size: 129022 MB
node 6 free: 128871 MB
node 7 cpus: 28 29 30 31
node 7 size: 116909 MB
node 7 free: 116845 MB
node 8 cpus: 32 33 34 35
node 8 size: 128988 MB
node 8 free: 128697 MB
node 9 cpus: 36 37 38 39
node 9 size: 129022 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

### Platform Notes (Continued)

```

node 9 free: 128912 MB
node 10 cpus: 40 41 42 43
node 10 size: 129022 MB
node 10 free: 128936 MB
node 11 cpus: 44 45 46 47
node 11 size: 129022 MB
node 11 free: 128950 MB
node 12 cpus: 48 49 50 51
node 12 size: 129022 MB
node 12 free: 128953 MB
node 13 cpus: 52 53 54 55
node 13 size: 129022 MB
node 13 free: 128955 MB
node 14 cpus: 56 57 58 59
node 14 size: 129022 MB
node 14 free: 128955 MB
node 15 cpus: 60 61 62 63
node 15 size: 129017 MB
node 15 free: 128937 MB

```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
1:	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32
2:	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32
3:	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11
9:	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11
11:	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11
12:	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11
13:	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11
14:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11
15:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10

From /proc/meminfo

```

MemTotal:      2101273356 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```
os-release:
  NAME="SLES"
  VERSION="15-SP3"
  VERSION_ID="15.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Oct 11 03:48
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   557G  11G  546G   2% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSC-C225-M6S
Serial:         WZP252309U3
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECSpeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECSpeed®2017\_fp\_peak = 237

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

Memory:  
16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200

BIOS:  
BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C225M6.4.2.1c.0.0806211349  
BIOS Date: 08/06/2021  
BIOS Revision: 5.22

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Compiler Version Notes (Continued)

| 654.roms\_s(base, peak)

```
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Portability Flags (Continued)

```

619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

```

Fortran benchmarks:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

```

Benchmarks using both Fortran and C:

```

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECSpeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECSpeed®2017\_fp\_peak = 237

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flt0 -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-fininline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

SPECSpeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECSpeed®2017\_fp\_peak = 237

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Peak Optimization Flags (Continued)

649.fotonik3d\_s: basepeak = yes

```

654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

```

Benchmarks using both Fortran and C:

```

621.wrf_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 230

Cisco UCS C225 M6 (AMD EPYC 7543 32-Core)

SPECspeed®2017\_fp\_peak = 237

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-11 07:46:02-0400.

Report generated on 2021-11-16 13:55:37 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-15.