



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

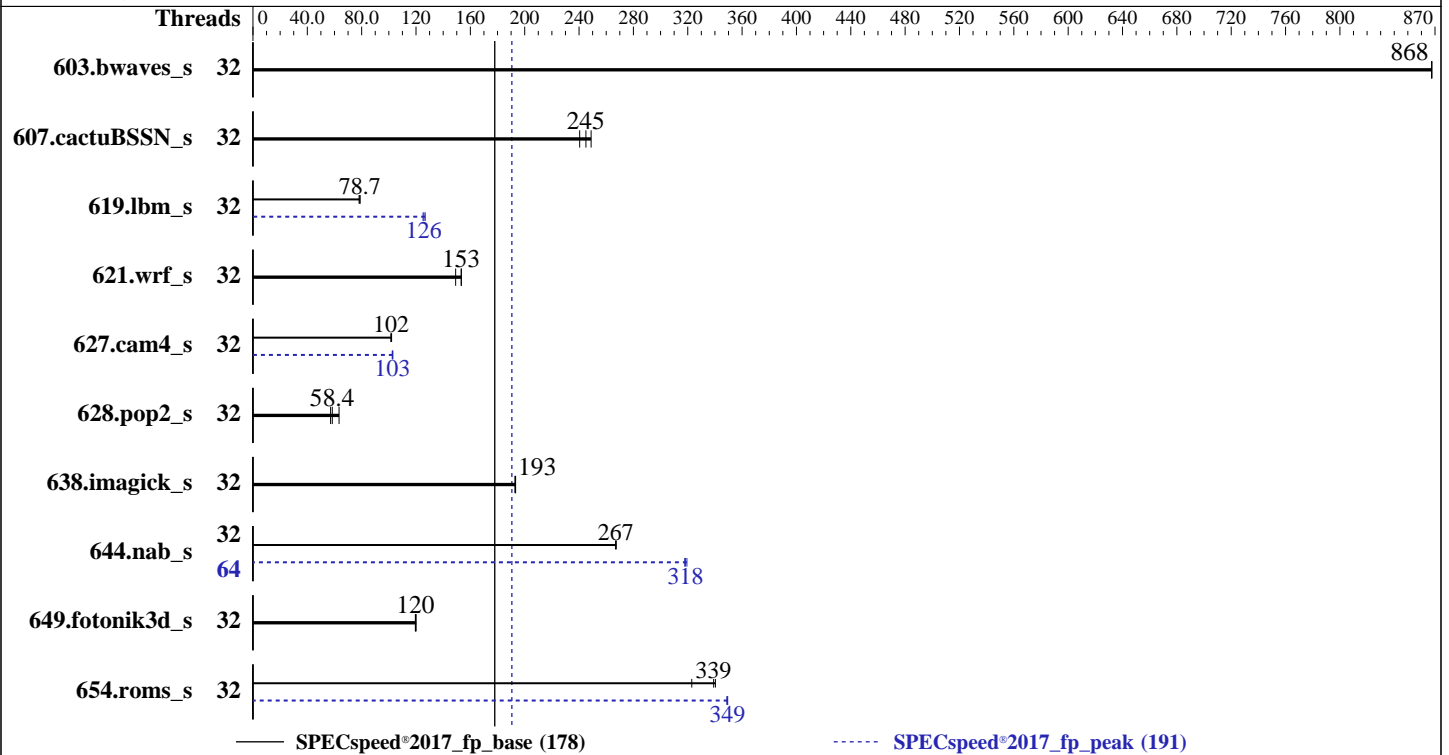

Hardware

CPU Name: AMD EPYC 7373X
 Max MHz: 3800
 Nominal: 3050
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip,
 96 MB shared / 2 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 400 GB SAS SSD
 Other: None

Software

OS: Ubuntu 20.04.3 LTS (x86_64)
 Kernel 5.13.0-28-generic
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version A42 v2.56 02/10/2022 released
 Feb-2022
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	68.0	868	68.0	868	68.0	867	32	68.0	868	68.0	868	68.0	867
607.cactuBSSN_s	32	69.3	240	68.0	245	67.0	249	32	69.3	240	68.0	245	67.0	249
619.lbm_s	32	66.5	78.8	66.6	78.7	67.1	78.1	32	41.6	126	41.3	127	41.8	125
621.wrf_s	32	86.3	153	86.2	153	88.7	149	32	86.3	153	86.2	153	88.7	149
627.cam4_s	32	87.0	102	86.9	102	87.3	102	32	86.1	103	86.5	103	86.3	103
628.pop2_s	32	203	58.4	208	57.1	187	63.4	32	203	58.4	208	57.1	187	63.4
638.imagick_s	32	74.6	193	74.7	193	74.8	193	32	74.6	193	74.7	193	74.8	193
644.nab_s	32	65.4	267	65.4	267	65.4	267	64	54.7	319	54.9	318	55.0	318
649.fotonik3d_s	32	76.2	120	75.9	120	76.3	120	32	76.2	120	75.9	120	76.3	120
654.roms_s	32	48.8	323	46.3	340	46.4	339	32	45.1	349	45.1	349	45.1	349

SPECspeed®2017_fp_base = **178**

SPECspeed®2017_fp_peak = **191**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2_s:  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_spee
d_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

```
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
  Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to One memory domain per socket
Thermal Configuration set to Maximum Cooling
Infinity Fabric Power Management set to Disabled
  Infinity Fabric Performance State set to P0
Workload Profile set to Custom
  Power Regulator set to OS Control Mode
```

The system date and time as discovered by sysinfo is incorrect as the time was not updated prior to the run. The test_date field shows an accurate date for the result.

The system ROM used for this result contains microcode version 0x 0A001227h for the AMD EPYC 7nn3X family of processors. The reference code/AGESA version used in this ROM is version MilanPI 1.0.0.8.

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on new-ProLiant-DL385-Gen10-Plus Mon Jan 10 10:39:10 2022
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7373X 16-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu from util-linux 2.34:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Byte Order:                   Little Endian
Address sizes:                48 bits physical, 48 bits virtual
CPU(s):                       64
On-line CPU(s) list:         0-63
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    2
NUMA node(s):                16
Vendor ID:                    AuthenticAMD
CPU family:                   25
Model:                        1
Model name:                   AMD EPYC 7373X 16-Core Processor
Stepping:                     2
Frequency boost:              enabled
CPU MHz:                      3050.000
CPU max MHz:                  3050.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     6089.17
Virtualization:               AMD-V
L1d cache:                    1 MiB
L1i cache:                    1 MiB
L2 cache:                     16 MiB
L3 cache:                     1.5 GiB
NUMA node0 CPU(s):           0,1,32,33
NUMA node1 CPU(s):           2,3,34,35
NUMA node2 CPU(s):           4,5,36,37
NUMA node3 CPU(s):           6,7,38,39
NUMA node4 CPU(s):           8,9,40,41
NUMA node5 CPU(s):           10,11,42,43
NUMA node6 CPU(s):           12,13,44,45
NUMA node7 CPU(s):           14,15,46,47
NUMA node8 CPU(s):           16,17,48,49
NUMA node9 CPU(s):           18,19,50,51
NUMA node10 CPU(s):          20,21,52,53
NUMA node11 CPU(s):          22,23,54,55
NUMA node12 CPU(s):          24,25,56,57
NUMA node13 CPU(s):          26,27,58,59
NUMA node14 CPU(s):          28,29,60,61
NUMA node15 CPU(s):          30,31,62,63
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaggs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected
 Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bml avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	512K	16M	8	Unified	2
L3	96M	1.5G	16	Unified	3

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)
 node 0 cpus: 0 1 32 33
 node 0 size: 128712 MB
 node 0 free: 128156 MB
 node 1 cpus: 2 3 34 35
 node 1 size: 129022 MB
 node 1 free: 128962 MB
 node 2 cpus: 4 5 36 37
 node 2 size: 129022 MB
 node 2 free: 128953 MB
 node 3 cpus: 6 7 38 39
 node 3 size: 129022 MB
 node 3 free: 128971 MB
 node 4 cpus: 8 9 40 41
 node 4 size: 129022 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Platform Notes (Continued)

```

node 4 free: 128974 MB
node 5 cpus: 10 11 42 43
node 5 size: 129022 MB
node 5 free: 128974 MB
node 6 cpus: 12 13 44 45
node 6 size: 129022 MB
node 6 free: 128980 MB
node 7 cpus: 14 15 46 47
node 7 size: 116909 MB
node 7 free: 116840 MB
node 8 cpus: 16 17 48 49
node 8 size: 129022 MB
node 8 free: 128891 MB
node 9 cpus: 18 19 50 51
node 9 size: 129022 MB
node 9 free: 128979 MB
node 10 cpus: 20 21 52 53
node 10 size: 129022 MB
node 10 free: 128880 MB
node 11 cpus: 22 23 54 55
node 11 size: 129022 MB
node 11 free: 128612 MB
node 12 cpus: 24 25 56 57
node 12 size: 129022 MB
node 12 free: 128935 MB
node 13 cpus: 26 27 58 59
node 13 size: 128989 MB
node 13 free: 128930 MB
node 14 cpus: 28 29 60 61
node 14 size: 129022 MB
node 14 free: 128972 MB
node 15 cpus: 30 31 62 63
node 15 size: 129015 MB
node 15 free: 128914 MB

```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
1:	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32
2:	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32
3:	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11
9:	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Platform Notes (Continued)

11:	32	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11
12:	32	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11
13:	32	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11
14:	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11
15:	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10

From /proc/meminfo

MemTotal: 2101145528 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: balanced

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS

From /etc/*release* /etc/*version*

debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.3 LTS (Focal Fossa)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.3 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux new-ProLiant-DL385-Gen10-Plus 5.13.0-28-generic #31~20.04.1-Ubuntu SMP Wed Jan 19 14:08:10 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): sanitization
Mitigation: Full AMD retpoline,
IBPB: conditional, IBRS_FW, STIBP:
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Jan 10 10:27

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc2	ext4	366G	22G	326G	7%	/

From /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant DL385 Gen10 Plus
Product Family: ProLiant
Serial: CN79340HC

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200
16x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE
BIOS Version: A42
BIOS Date: 02/10/2022
BIOS Revision: 2.56
Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick_s: basepeak = yes

```
644.nab_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jan-2022

Peak Optimization Flags (Continued)

654.roms_s (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(3.05 GHz, AMD EPYC 7373X)

SPECspeed®2017_fp_base = 178

SPECspeed®2017_fp_peak = 191

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Jan-2022

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-10 00:09:10-0500.

Report generated on 2022-04-01 13:23:17 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.