



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_base = 127

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2022

Hardware Availability: Apr-2022

Software Availability: Nov-2021

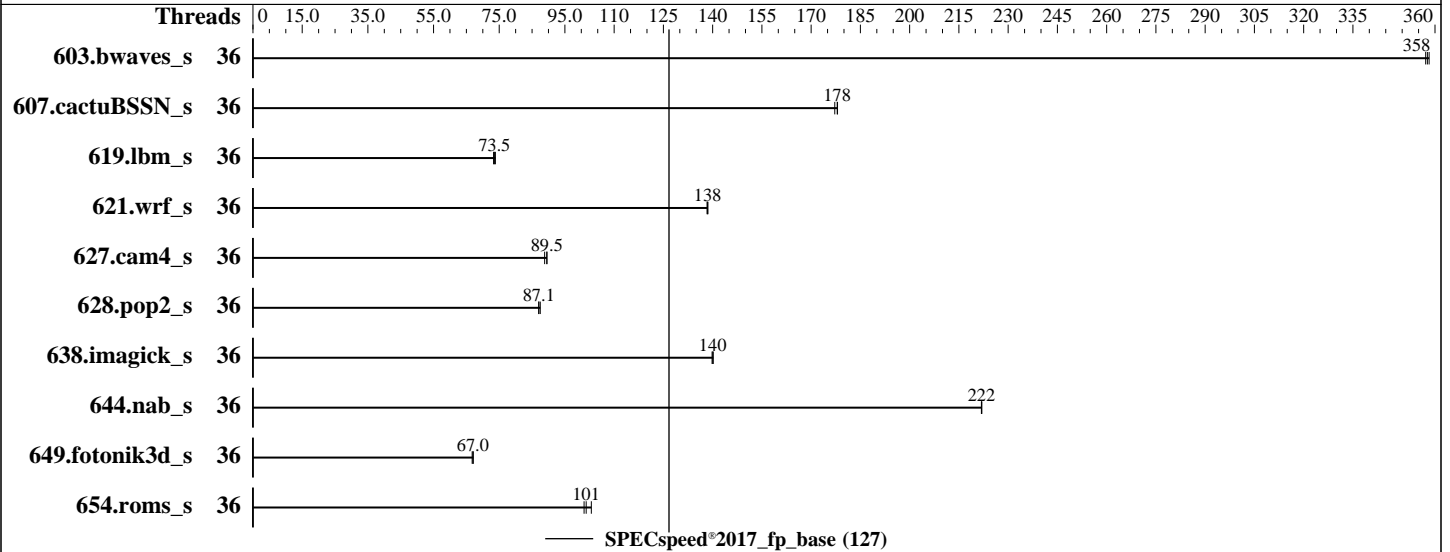

Hardware

CPU Name: Intel Xeon Platinum 8352V
 Max MHz: 3500
 Nominal: 2100
 Enabled: 36 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 54 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.5 (Ootpa)
 Kernel 4.18.0-348.el8.x86_64
 Compiler: Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version CME104I 1.01 released Mar-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
603.bwaves_s	36	165	357	<u>165</u>	<u>358</u>	165	358									
607.cactuBSSN_s	36	94.1	177	93.6	178	<u>93.7</u>	<u>178</u>									
619.lbm_s	36	71.5	73.3	70.9	73.8	<u>71.2</u>	<u>73.5</u>									
621.wrf_s	36	95.6	138	95.5	139	<u>95.5</u>	<u>138</u>									
627.cam4_s	36	99.8	88.8	<u>99.0</u>	<u>89.5</u>	99.0	89.5									
628.pop2_s	36	136	87.0	136	87.5	<u>136</u>	<u>87.1</u>									
638.imagick_s	36	103	140	<u>103</u>	<u>140</u>	103	140									
644.nab_s	36	78.8	222	78.7	222	<u>78.7</u>	<u>222</u>									
649.fotonik3d_s	36	<u>136</u>	<u>67.0</u>	137	66.8	136	67.1									
654.roms_s	36	156	101	<u>155</u>	<u>101</u>	153	103									

SPECspeed®2017_fp_base = 127

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic202
1.1-revB/je5.0.1-64"
MALLOCCONF = "retain:true"
OMP_STACKSIZE = "192M"

```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
Hyper-Threading set to Disabled
C-States set to Legacy
CPU P-state Control set to Cooperative with Legacy
Adjacent Cache Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Fri May 13 00:32:08 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz
1 "physical id"s (chips)
36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 36
siblings : 36
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35

From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 36
On-line CPU(s) list: 0-35
Thread(s) per core: 1
Core(s) per socket: 36
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 106

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz
BIOS Model name: Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2100.000
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 55296K
NUMA node0 CPU(s): 0-35
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear
pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 55296 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35
node 0 size: 257591 MB
node 0 free: 256626 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 263773192 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.5 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.5"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 May 13 00:31

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        xfs       819G  26G  794G   4% /home

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Platform Notes (Continued)

```

From /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkEdge SE450
Product Family: ThinkSystem
Serial:      1234567890

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

```

BIOS Vendor:      Lenovo
BIOS Version:     CME104I-1.01
BIOS Date:        03/17/2022
BIOS Revision:    1.1
Firmware Revision: 1.10

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

```

```

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Compiler Version Notes (Continued)

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 127

ThinkEdge SE450
(2.10 GHz, Intel Xeon Platinum 8352V)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-J.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-J.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-12 12:32:08-0400.
Report generated on 2022-06-07 15:46:53 by CPU2017 PDF formatter v6442.
Originally published on 2022-06-07.