



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_base = 52.9

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2022

Hardware Availability: Apr-2022

Software Availability: May-2021

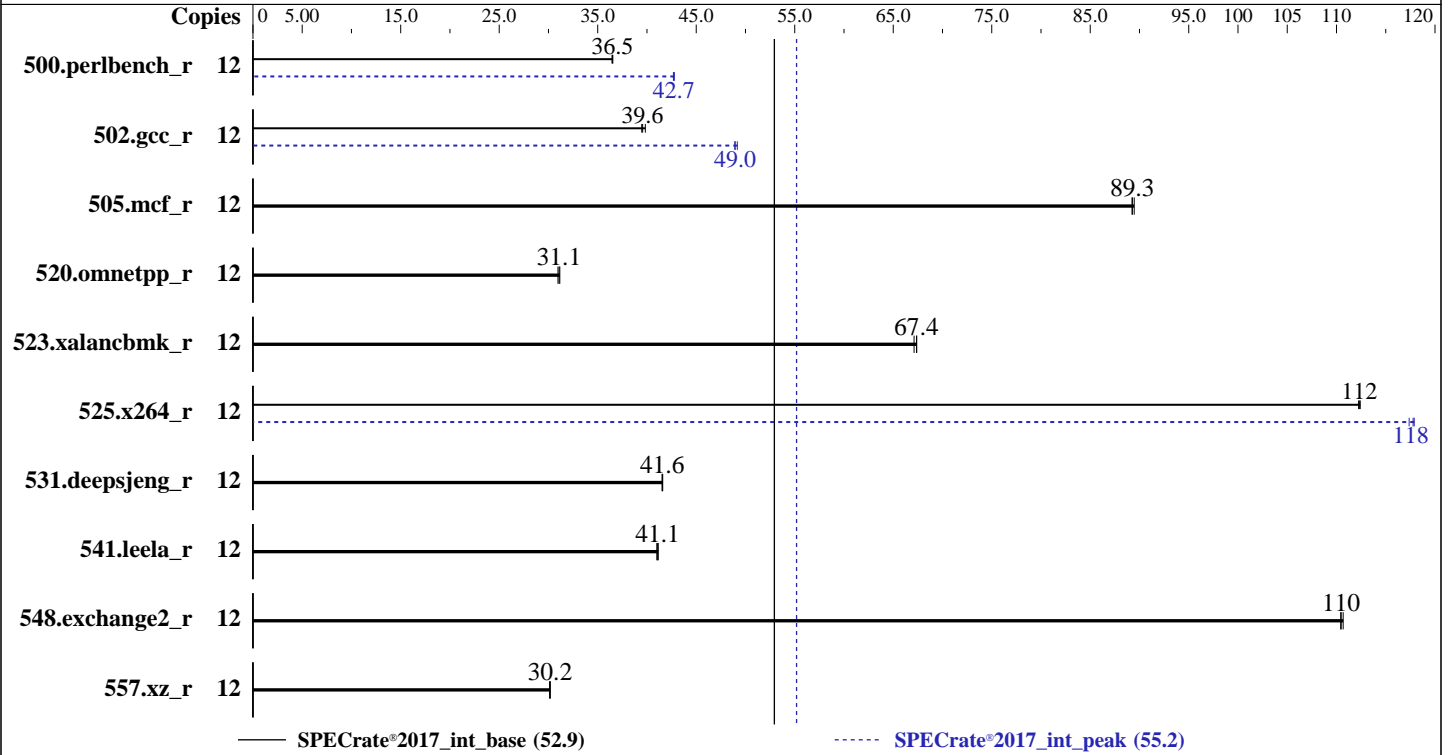

### Hardware

CPU Name: Intel Xeon E-2336  
 Max MHz: 4800  
 Nominal: 2900  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-3200AA-E, running at 2933)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)  
 Kernel 4.18.0-305.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TQE104H 1.01 released Jun-2022 tested as TQE103G 1.01 Apr-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_base = 52.9

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: May-2022  
Hardware Availability: Apr-2022  
Software Availability: May-2021

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	523	36.5	524	36.4	<u>523</u>	<u>36.5</u>	12	<u>447</u>	<u>42.7</u>	448	42.7	447	42.8
502.gcc_r	12	<u>430</u>	<u>39.6</u>	427	39.8	431	39.5	12	347	48.9	<u>347</u>	<u>49.0</u>	346	49.2
505.mcf_r	12	217	89.2	<u>217</u>	<u>89.3</u>	217	89.5	12	217	89.2	<u>217</u>	<u>89.3</u>	217	89.5
520.omnetpp_r	12	508	31.0	505	31.2	<u>507</u>	<u>31.1</u>	12	508	31.0	505	31.2	<u>507</u>	<u>31.1</u>
523.xalancbmk_r	12	188	67.4	189	67.1	<u>188</u>	<u>67.4</u>	12	188	67.4	189	67.1	<u>188</u>	<u>67.4</u>
525.x264_r	12	187	112	187	112	<u>187</u>	<u>112</u>	12	179	117	178	118	<u>178</u>	<u>118</u>
531.deepsjeng_r	12	331	41.6	331	41.5	<u>331</u>	<u>41.6</u>	12	331	41.6	331	41.5	<u>331</u>	<u>41.6</u>
541.leela_r	12	483	41.1	485	41.0	<u>484</u>	<u>41.1</u>	12	483	41.1	485	41.0	<u>484</u>	<u>41.1</u>
548.exchange2_r	12	284	111	285	110	<u>285</u>	<u>110</u>	12	284	111	285	110	<u>285</u>	<u>110</u>
557.xz_r	12	429	30.2	<u>430</u>	<u>30.2</u>	430	30.1	12	429	30.2	<u>430</u>	<u>30.2</u>	430	30.1

SPECrate®2017\_int\_base = **52.9**

SPECrate®2017\_int\_peak = **55.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic2021.1-revB/lib/ia32:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2022  
**Hardware Availability:** Apr-2022  
**Software Availability:** May-2021

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
CPU P-state Control set to Cooperative without Legacy

```
Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Mon May 23 01:32:02 2022
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2336 CPU @ 2.90GHz
 1 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
```

```
From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 12
On-line CPU(s) list: 0-11
Thread(s) per core: 2
Core(s) per socket: 6
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: May-2021

### Platform Notes (Continued)

```

Model: 167
Model name: Intel(R) Xeon(R) E-2336 CPU @ 2.90GHz
BIOS Model name: Intel(R) Xeon(R) E-2336 CPU @ 2.90GHz
Stepping: 1
CPU MHz: 4600.000
CPU max MHz: 4800.0000
CPU min MHz: 800.0000
BogoMIPS: 5808.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 512K
L3 cache: 12288K
NUMA node0 CPU(s): 0-11
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx
smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 64325 MB
node 0 free: 63617 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 65869744 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

**CPU2017 License:** 9017

**Test Date:** May-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2022

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2021

### Platform Notes (Continued)

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
```

```
NAME="Red Hat Enterprise Linux"
```

```
VERSION="8.4 (Ootpa)"
```

```
ID="rhel"
```

```
ID_LIKE="fedora"
```

```
VERSION_ID="8.4"
```

```
PLATFORM_ID="platform:el8"
```

```
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
```

```
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
```

```
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:
```

```
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

```
run-level 3 May 23 01:31
```

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   790G  103G  688G  13% /home
```

```
From /sys/devices/virtual/dmi/id
```

```
Vendor:          Lenovo
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: May-2021

### Platform Notes (Continued)

Product: ThinkSystem SR250 V2  
Product Family: ThinkSystem  
Serial: 1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x SK Hynix HMA82GU7DJR8N-XN 16 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: Lenovo  
BIOS Version: TQE103G-1.01  
BIOS Date: 04/19/2022  
BIOS Revision: 1.1  
Firmware Revision: 1.96

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 500.perlbench\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_base = 52.9

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2022

Hardware Availability: Apr-2022

Software Availability: May-2021

### Compiler Version Notes (Continued)

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

**CPU2017 License:** 9017

**Test Date:** May-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2022

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2021

### Compiler Version Notes (Continued)

Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

### Base Portability Flags

500.perlbenc\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: May-2021

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 52.9

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_peak = 55.2

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2022

Hardware Availability: Apr-2022

Software Availability: May-2021

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR250 V2  
(2.90 GHz, Intel Xeon E-2336)

SPECrate®2017\_int\_base = 52.9

SPECrate®2017\_int\_peak = 55.2

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2021

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-RocketB-A.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-RocketB-A.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-22 13:32:02-0400.

Report generated on 2022-06-21 17:28:46 by CPU2017 PDF formatter v6442.

Originally published on 2022-06-21.