



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro


A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2022  
Hardware Availability: Nov-2022  
Software Availability: Nov-2022

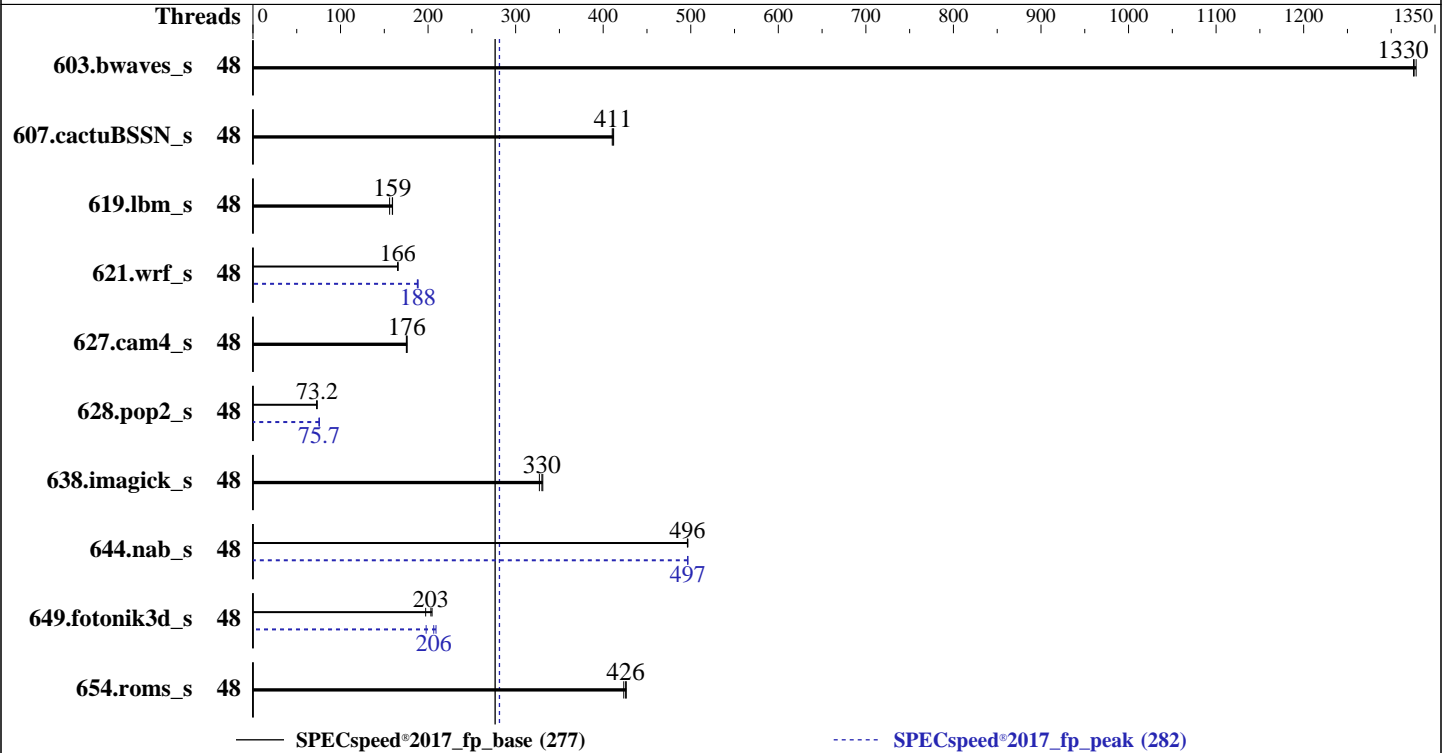

### Hardware

CPU Name: AMD EPYC 9254  
Max MHz: 4150  
Nominal: 2900  
Enabled: 48 cores, 2 chips  
Orderable: 2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 4 TB NVMe SSD  
Other: None

### Software

OS: Ubuntu 22.04 LTS  
Kernel 5.15.0-53-generic  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 1.0.V1 released Nov-2022  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS set to max performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2022  
Hardware Availability: Nov-2022  
Software Availability: Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	44.5	1330	44.4	1330	<b><u>44.5</u></b>	<b><u>1330</u></b>	48	44.5	1330	44.4	1330	<b><u>44.5</u></b>	<b><u>1330</u></b>
607.cactuBSSN_s	48	40.6	410	<b><u>40.5</u></b>	<b><u>411</u></b>	40.5	412	48	40.6	410	<b><u>40.5</u></b>	<b><u>411</u></b>	40.5	412
619.lbm_s	48	32.9	159	33.6	156	<b><u>32.9</u></b>	<b><u>159</u></b>	48	32.9	159	33.6	156	<b><u>32.9</u></b>	<b><u>159</u></b>
621.wrf_s	48	79.8	166	<b><u>79.9</u></b>	<b><u>166</u></b>	80.1	165	48	70.1	189	70.5	188	<b><u>70.3</u></b>	<b><u>188</u></b>
627.cam4_s	48	50.3	176	50.6	175	<b><u>50.4</u></b>	<b><u>176</u></b>	48	50.3	176	50.6	175	<b><u>50.4</u></b>	<b><u>176</u></b>
628.pop2_s	48	<b><u>162</u></b>	<b><u>73.2</u></b>	163	72.7	162	73.2	48	157	75.6	157	75.7	<b><u>157</u></b>	<b><u>75.7</u></b>
638.imagick_s	48	<b><u>43.7</u></b>	<b><u>330</u></b>	43.6	331	44.1	327	48	<b><u>43.7</u></b>	<b><u>330</u></b>	43.6	331	44.1	327
644.nab_s	48	35.2	496	<b><u>35.2</u></b>	<b><u>496</u></b>	35.2	497	48	35.2	497	35.2	496	<b><u>35.2</u></b>	<b><u>497</u></b>
649.fotonik3d_s	48	44.6	205	<b><u>44.9</u></b>	<b><u>203</u></b>	46.2	197	48	46.1	198	<b><u>44.2</u></b>	<b><u>206</u></b>	43.6	209
654.roms_s	48	37.2	423	<b><u>37.0</u></b>	<b><u>426</u></b>	36.9	426	48	37.2	423	<b><u>37.0</u></b>	<b><u>426</u></b>	36.9	426

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

### Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-47"
PGHPPF_ZMEM = "yes"
```

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:  
Determinism Control = Manual  
Determinism Enable = Disable Performance Determinism  
cTDP Control = Manual  
cTDP = 240  
Package Power Limit Control = Manual  
Package Power Limit = 240  
ACPI SRAT L3 cache As NUMA Domain = Enabled  
SMT Control = Disabled

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on h13dsh-9254 Thu Nov 24 09:05:12 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 9254 24-Core Processor  
2 "physical id"s (chips)  
48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 24  
siblings : 24  
physical 0: cores 0 1 2 3 4 5 16 17 18 19 20 21 32 33 34 35 36 37 48 49 50 51 52 53  
physical 1: cores 0 1 2 3 4 5 16 17 18 19 20 21 32 33 34 35 36 37 48 49 50 51 52 53

From lscpu from util-linux 2.37.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 52 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 48  
On-line CPU(s) list: 0-47  
Vendor ID: AuthenticAMD  
Model name: AMD EPYC 9254 24-Core Processor  
CPU family: 25

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

Model: 17
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 4153.0000
CPU min MHz: 400.0000
BogoMIPS: 5799.86
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpxt perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization: AMD-V
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5
NUMA node1 CPU(s): 6-11
NUMA node2 CPU(s): 12-17
NUMA node3 CPU(s): 18-23
NUMA node4 CPU(s): 24-29
NUMA node5 CPU(s): 30-35
NUMA node6 CPU(s): 36-41
NUMA node7 CPU(s): 42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

pointer sanitization  
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP disabled, RSB filling, PBR SB-eIBRS Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 193269 MB
node 0 free: 192591 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 193520 MB
node 1 free: 192790 MB
node 2 cpus: 12 13 14 15 16 17
node 2 size: 193520 MB
node 2 free: 192584 MB
node 3 cpus: 18 19 20 21 22 23
node 3 size: 193485 MB
node 3 free: 192803 MB
node 4 cpus: 24 25 26 27 28 29
node 4 size: 193520 MB
node 4 free: 192517 MB
node 5 cpus: 30 31 32 33 34 35
node 5 size: 193520 MB
node 5 free: 192548 MB
node 6 cpus: 36 37 38 39 40 41
node 6 size: 193461 MB
node 6 free: 192686 MB
node 7 cpus: 42 43 44 45 46 47
node 7 size: 193520 MB
node 7 free: 192304 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 11 11 32 32 32 32
1:  11 10 11 11 32 32 32 32

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

2:	11	11	10	11	32	32	32	32
3:	11	11	11	10	32	32	32	32
4:	32	32	32	32	10	11	11	11
5:	32	32	32	32	11	10	11	11
6:	32	32	32	32	11	11	10	11
7:	32	32	32	32	11	11	11	10

From /proc/meminfo

MemTotal: 1584967540 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d  
Ubuntu 22.04.1 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: bookworm/sid  
os-release:  
PRETTY\_NAME="Ubuntu 22.04.1 LTS"  
NAME="Ubuntu"  
VERSION\_ID="22.04"  
VERSION="22.04.1 LTS (Jammy Jellyfish)"  
VERSION\_CODENAME=jammy  
ID=ubuntu  
ID\_LIKE=debian  
HOME\_URL="https://www.ubuntu.com/"

uname -a:

Linux h13dsh-9254 5.15.0-53-generic #59-Ubuntu SMP Mon Oct 17 18:53:30 UTC 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): sanitization  
Mitigation: Retpolines, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling, PBRSE-eIBRS: Not affected

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Nov 24 04:07

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	ext4	3.5T	18G	3.3T	1%	/

From /sys/devices/virtual/dmi/id

Vendor: Supermicro  
Product: Super Server  
Product Family: SMC H13  
Serial: 123456789

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

BIOS:

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.0.V1  
BIOS Date: 11/16/2022  
BIOS Revision: 5.27

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
=====

```

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2022  
Hardware Availability: Nov-2022  
Software Availability: Nov-2022

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:  
-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

603.bwaves\_s: basepeak = yes

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-1125HS-TNR  
(H13DSH , AMD EPYC 9254)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 282

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-24 04:05:12-0500.  
Report generated on 2022-12-20 15:09:30 by CPU2017 PDF formatter v6442.  
Originally published on 2022-12-20.