



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro


A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2022  
Hardware Availability: Nov-2022  
Software Availability: Nov-2022

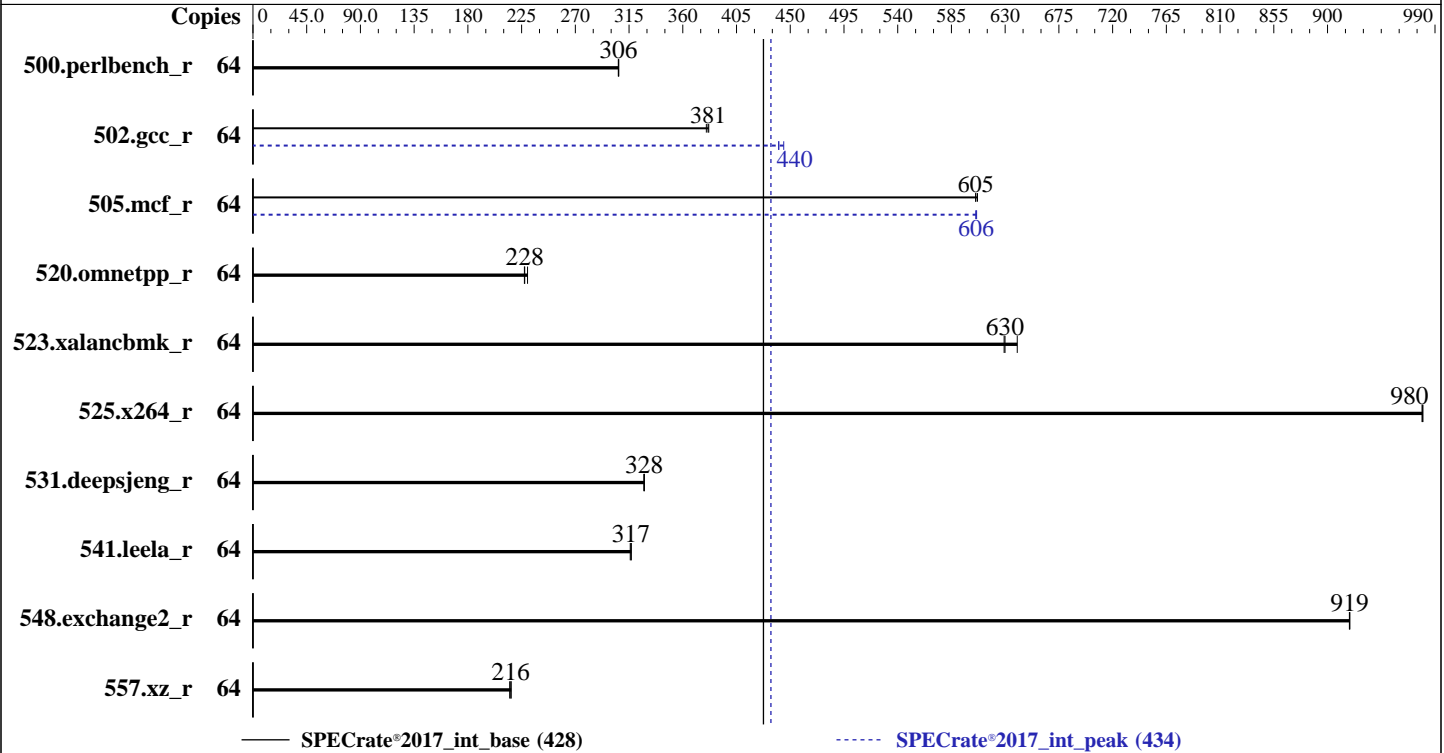

### Hardware

CPU Name: AMD EPYC 9174F  
 Max MHz: 4400  
 Nominal: 4100  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 2 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB NVMe  
 Other: None

### Software

OS: Ubuntu 22.04 LTS  
 kernel 5.15.0-52-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.0 released Oct-2022  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2022  
Hardware Availability: Nov-2022  
Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	333	306	<b>333</b>	<b>306</b>	333	306	64	333	306	<b>333</b>	<b>306</b>	333	306
502.gcc_r	64	237	382	<b>238</b>	<b>381</b>	239	380	64	206	440	<b>206</b>	<b>440</b>	204	445
505.mcf_r	64	<b>171</b>	<b>605</b>	171	605	170	607	64	<b>171</b>	<b>606</b>	171	606	171	606
520.omnetpp_r	64	369	227	<b>369</b>	<b>228</b>	365	230	64	369	227	<b>369</b>	<b>228</b>	365	230
523.xalancbmk_r	64	<b>107</b>	<b>630</b>	107	629	106	640	64	<b>107</b>	<b>630</b>	107	629	106	640
525.x264_r	64	<b>114</b>	<b>980</b>	114	979	114	980	64	<b>114</b>	<b>980</b>	114	979	114	980
531.deepsjeng_r	64	224	328	<b>224</b>	<b>328</b>	224	327	64	224	328	<b>224</b>	<b>328</b>	224	327
541.leela_r	64	335	316	<b>335</b>	<b>317</b>	334	317	64	335	316	<b>335</b>	<b>317</b>	334	317
548.exchange2_r	64	183	918	<b>183</b>	<b>919</b>	183	919	64	183	918	<b>183</b>	<b>919</b>	183	919
557.xz_r	64	322	215	320	216	<b>320</b>	<b>216</b>	64	322	215	320	216	<b>320</b>	<b>216</b>

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/root/cpu2017/amd\_rate\_aocc400\_genoa\_B\_lib/lib:/root/cpu2017/amd\_rate\_a  
occ400\_genoa\_B\_lib/lib32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
Determinism Control = Manual  
Determinism Enable = Disable Performance Determinism  
cTDP Control = Manual  
cTDP = 400  
Package Power Limit Control = Manual  
Package Power Limit = 400  
NUMA Nodes Per Socket = NPS4

Sysinfo program /root/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on hyper2shpc Fri Nov 4 00:26:37 2022

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9174F 16-Core Processor
 2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 16 17 24 25 32 33 40 41 48 49 56 57
physical 1: cores 0 1 16 17 24 25 32 33 40 41 48 49 56 57
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9174F 16-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            4409.0000
CPU min MHz:           400.0000
BogoMIPS:               8199.52
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpxt perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

la57 rdpid overflow_recov succor smca fsm flush_llid
Virtualization: AMD-V
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 32 MiB (32 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 32 33 34 35  
node 0 size: 193268 MB  
node 0 free: 192053 MB  
node 1 cpus: 4 5 6 7 36 37 38 39

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

node 1 size: 193520 MB
node 1 free: 192310 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 193520 MB
node 2 free: 192310 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 193520 MB
node 3 free: 192309 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 193520 MB
node 4 free: 192044 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 193520 MB
node 5 free: 192265 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 193485 MB
node 6 free: 192344 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 193457 MB
node 7 free: 192269 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      1584962920 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d

Ubuntu 22.04 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: bookworm/sid

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
os-release:
  PRETTY_NAME="Ubuntu 22.04 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04 (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

```
uname -a:
Linux hyper2shpc 5.15.0-52-generic #58-Ubuntu SMP Thu Oct 13 08:03:55 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling, PBRSE-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 5 Nov 3 19:05
```

```
SPEC is set to: /root/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 879G 56G 778G 7% /
```

```
From /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: SMC H13
Serial: 123456789
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800

BIOS:

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.0  
BIOS Date: 10/24/2022  
BIOS Revision: 5.27

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

### Compiler Version Notes (Continued)

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

### C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate<sup>®</sup>2017\_int\_base = 428

SPECrate<sup>®</sup>2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:  
-Wno-unused-command-line-argument

C++ benchmarks:  
-Wno-unused-command-line-argument

Fortran benchmarks:  
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:  
500.perlbench\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd\_rate\_aocc400\_genoa\_B\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

A+ Server AS-2125HS-TNR  
(H13DSH , AMD EPYC 9174F)

SPECrate®2017\_int\_base = 428

SPECrate®2017\_int\_peak = 434

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2022  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-03 20:26:36-0400.

Report generated on 2023-01-10 16:45:24 by CPU2017 PDF formatter v6442.

Originally published on 2023-01-10.