



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573


Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

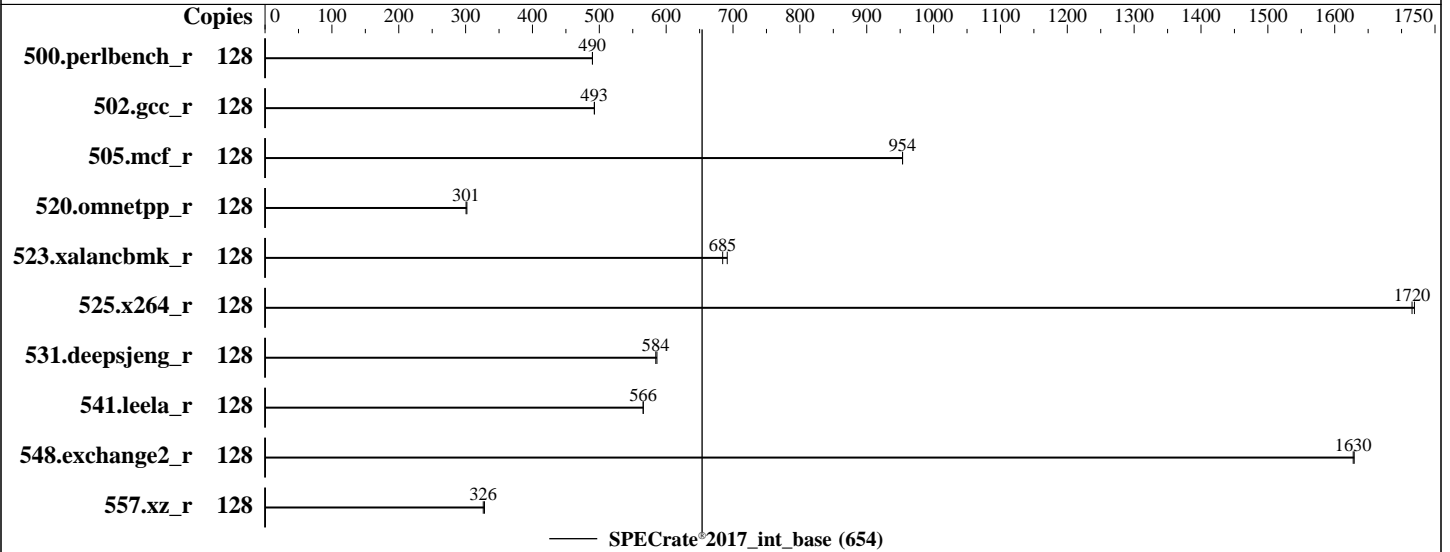

### Hardware

CPU Name: AMD EPYC 9554P  
 Max MHz: 3750  
 Nominal: 3100  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
 5.15.0-46-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 0.5.3 released Nov-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2022  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	128	416	490	<b><u>416</u></b>	<b><u>490</u></b>											
502.gcc_r	128	368	493	<b><u>368</u></b>	<b><u>493</u></b>											
505.mcf_r	128	217	954	<b><u>217</u></b>	<b><u>954</u></b>											
520.omnetpp_r	128	556	302	<b><u>559</u></b>	<b><u>301</u></b>											
523.xalancbmk_r	128	196	691	<b><u>197</u></b>	<b><u>685</u></b>											
525.x264_r	128	<b><u>131</u></b>	<b><u>1720</u></b>	130	1720											
531.deepsjeng_r	128	250	586	<b><u>251</u></b>	<b><u>584</u></b>											
541.leela_r	128	<b><u>375</u></b>	<b><u>566</u></b>	375	566											
548.exchange2_r	128	<b><u>206</u></b>	<b><u>1630</u></b>	206	1630											
557.xz_r	128	421	328	<b><u>424</u></b>	<b><u>326</u></b>											

SPECrate®2017\_int\_base = 654

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_rate_aocc400_genoa_B_lib/lib  
    :/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_rate_aocc400_genoa_B_lib/lib  
    32:"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled  
Virtualization Technology : Disabled  
NUMA Nodes per Socket : 4  
L3 Cache as NUMA Domain : Enabled

System Profile : Custom  
Memory Patrol Scrub : Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

PCI ASPM L1 Link  
Power Management : Disabled  
Determinism Slider : Power Determinism

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-Blb/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on amd-sut Wed Nov 16 04:43:27 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 9554P 64-Core Processor  
1 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 64  
siblings : 128  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59 60 61 62 63

From lscpu from util-linux 2.37.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 52 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Vendor ID: AuthenticAMD  
Model name: AMD EPYC 9554P 64-Core Processor  
CPU family: 25  
Model: 17  
Thread(s) per core: 2  
Core(s) per socket: 64  
Socket(s): 1  
Stepping: 1  
Frequency boost: enabled  
CPU max MHz: 3764.0000  
CPU min MHz: 400.0000  
BogoMIPS: 6201.39  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr  
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt  
pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid  
aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 x2apic movbe

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpxt perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 invpcid\_single hw\_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif v\_spec\_ctrl avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid overflow\_recov succor smca fsrm flush\_lld

Virtualization: AMD-V  
 L1d cache: 2 MiB (64 instances)  
 L1i cache: 2 MiB (64 instances)  
 L2 cache: 64 MiB (64 instances)  
 L3 cache: 256 MiB (8 instances)  
 NUMA node(s): 8  
 NUMA node0 CPU(s): 0-7,64-71  
 NUMA node1 CPU(s): 32-39,96-103  
 NUMA node2 CPU(s): 16-23,80-87  
 NUMA node3 CPU(s): 48-55,112-119  
 NUMA node4 CPU(s): 24-31,88-95  
 NUMA node5 CPU(s): 56-63,120-127  
 NUMA node6 CPU(s): 8-15,72-79  
 NUMA node7 CPU(s): 40-47,104-111  
 Vulnerability Itlb multihit: Not affected  
 Vulnerability L1tf: Not affected  
 Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Mmio stale data: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 1024 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 96310 MB
node 0 free: 92368 MB
node 1 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 1 size: 96763 MB
node 1 free: 96432 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 96728 MB
node 2 free: 96439 MB
node 3 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 3 size: 96763 MB
node 3 free: 96494 MB
node 4 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 4 size: 96764 MB
node 4 free: 96505 MB
node 5 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 5 size: 96763 MB
node 5 free: 96523 MB
node 6 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 6 size: 96764 MB
node 6 free: 96501 MB
node 7 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 7 size: 96722 MB
node 7 free: 96473 MB
```

```
node distances:
node 0 1 2 3 4 5 6 7
0: 10 11 12 12 12 12 12 12
1: 11 10 12 12 12 12 12 12
2: 12 12 10 11 12 12 12 12
3: 12 12 11 10 12 12 12 12
4: 12 12 12 12 10 11 12 12
5: 12 12 12 12 11 10 12 12
6: 12 12 12 12 12 12 10 11
7: 12 12 12 12 12 12 11 10
```

From /proc/meminfo

```
MemTotal: 792144480 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

Current active profile: latency-performance

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance
```

```
/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
  PRETTY_NAME="Ubuntu 22.04.1 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04.1 LTS (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

```
uname -a:
Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Nov 16 04:40
```

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2022  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	3.4G	122G	3%	/mnt/ramdisk

```

From /sys/devices/virtual/dmi/id
Vendor:           Dell Inc.
Product:          PowerEdge R7615
Product Family:  PowerEdge
Serial:           RDB5031

```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  12x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

```

```

BIOS:
  BIOS Vendor:      Dell Inc.
  BIOS Version:     0.5.3
  BIOS Date:        11/10/2022
  BIOS Revision:    0.5

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

```

```

=====
C++       | 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

-----  
=====  
Fortran | 548.exchange2\_r(base)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 654

PowerEdge R7615 (AMD EPYC 9554P 64-Core Processor)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6573

**Test Date:** Nov-2022

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Feb-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-15 23:43:27-0500.

Report generated on 2023-02-01 18:17:40 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.