



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: Jun-2022

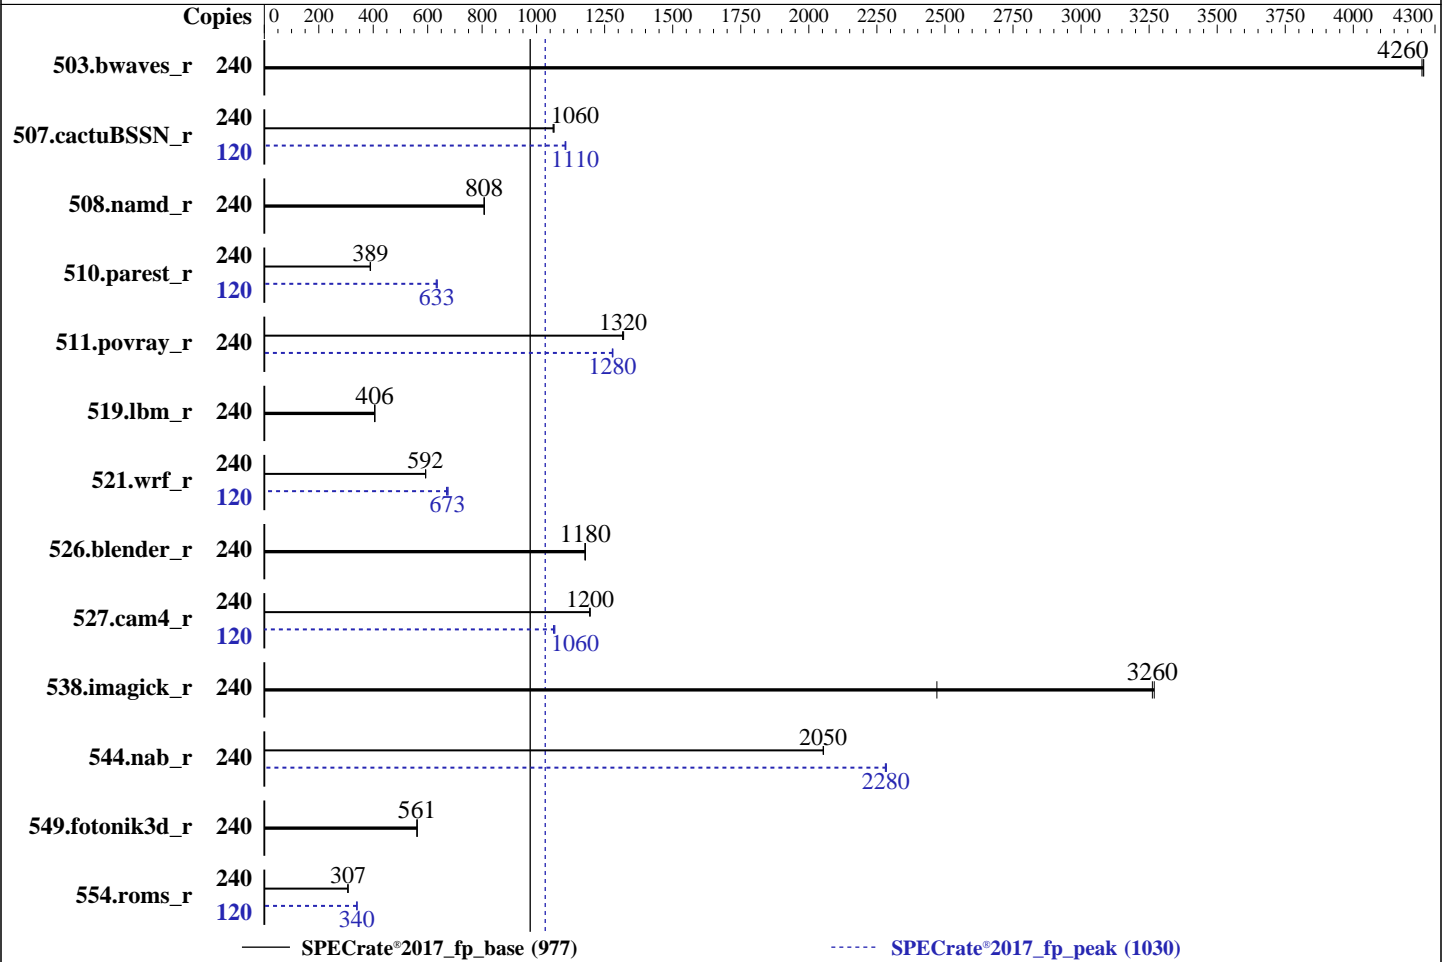

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
 Max MHz: 3500  
 Nominal: 1900  
 Enabled: 120 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 112.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 240 GB NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version T20221219103450 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Dec-2022  
Hardware Availability: Jan-2023  
Software Availability: Jun-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	240	<b>565</b>	<b>4260</b>	565	4260	566	4250	240	<b>565</b>	<b>4260</b>	565	4260	566	4250
507.cactuBSSN_r	240	286	1060	286	1060	<b>286</b>	<b>1060</b>	120	137	1110	<b>137</b>	<b>1110</b>	138	1100
508.namd_r	240	<b>282</b>	<b>808</b>	282	808	282	807	240	<b>282</b>	<b>808</b>	282	808	282	807
510.parest_r	240	1614	389	<b>1612</b>	<b>389</b>	1609	390	120	<b>496</b>	<b>633</b>	494	635	497	631
511.povray_r	240	426	1320	<b>425</b>	<b>1320</b>	425	1320	240	438	1280	438	1280	<b>438</b>	<b>1280</b>
519.lbm_r	240	624	406	<b>624</b>	<b>406</b>	624	405	240	624	406	<b>624</b>	<b>406</b>	624	405
521.wrf_r	240	<b>907</b>	<b>592</b>	907	593	908	592	120	<b>399</b>	<b>673</b>	402	669	398	675
526.blender_r	240	310	1180	<b>310</b>	<b>1180</b>	310	1180	240	310	1180	<b>310</b>	<b>1180</b>	310	1180
527.cam4_r	240	<b>351</b>	<b>1200</b>	351	1200	351	1200	120	<b>197</b>	<b>1060</b>	198	1060	197	1070
538.imagick_r	240	242	2470	<b>183</b>	<b>3260</b>	183	3270	240	242	2470	<b>183</b>	<b>3260</b>	183	3270
544.nab_r	240	197	2050	197	2050	<b>197</b>	<b>2050</b>	240	177	2280	<b>177</b>	<b>2280</b>	177	2280
549.fotonik3d_r	240	1667	561	1667	561	<b>1667</b>	<b>561</b>	240	1667	561	1667	561	<b>1667</b>	<b>561</b>
554.roms_r	240	1244	306	<b>1240</b>	<b>307</b>	1240	308	120	561	340	<b>561</b>	<b>340</b>	560	341

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Settings:  
Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance  
DCU Streamer Prefetcher = Disable  
SNC = Enable SNC4 (4-clusters)  
LLC Dead Line Alloc = Disable  
KTI Prefetch = Enable  
Stale AtoS = Disable  
Patrol Scrub = Disable

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Wed Dec 21 17:25:35 2022
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8490H
 2 "physical id"s (chips)
240 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 60
siblings : 120
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               240
On-line CPU(s) list: 0-239
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) Platinum 8490H
CPU family:           6
Model:                143
Thread(s) per core:  2
Core(s) per socket:  60
Socket(s):            2
Stepping:             6
BogoMIPS:             3800.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd
fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d
arch_capabilities
Virtualization:       VT-x
L1d cache:           5.6 MiB (120 instances)
L1i cache:           3.8 MiB (120 instances)
L2 cache:            240 MiB (120 instances)
L3 cache:            225 MiB (2 instances)
NUMA node(s):        8
NUMA node0 CPU(s):  0-14,120-134
NUMA node1 CPU(s):  15-29,135-149
NUMA node2 CPU(s):  30-44,150-164
NUMA node3 CPU(s):  45-59,165-179
NUMA node4 CPU(s):  60-74,180-194

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

```

NUMA node5 CPU(s):          75-89,195-209
NUMA node6 CPU(s):          90-104,210-224
NUMA node7 CPU(s):          105-119,225-239
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data  
cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
130 131 132 133 134
node 0 size: 64142 MB
node 0 free: 48024 MB
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
142 143 144 145 146 147 148 149
node 1 size: 64469 MB
node 1 free: 52665 MB
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
157 158 159 160 161 162 163 164
node 2 size: 64504 MB
node 2 free: 52729 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
172 173 174 175 176 177 178 179
node 3 size: 64504 MB
node 3 free: 52726 MB
node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
187 188 189 190 191 192 193 194

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

```

node 4 size: 64504 MB
node 4 free: 52699 MB
node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201
202 203 204 205 206 207 208 209
node 5 size: 64504 MB
node 5 free: 52673 MB
node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215
216 217 218 219 220 221 222 223 224
node 6 size: 64504 MB
node 6 free: 52369 MB
node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227
228 229 230 231 232 233 234 235 236 237 238 239
node 7 size: 64457 MB
node 7 free: 52670 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  12  12  12  21  21  21  21
  1:  12  10  12  12  21  21  21  21
  2:  12  12  10  12  21  21  21  21
  3:  12  12  12  10  21  21  21  21
  4:  21  21  21  21  10  12  12  12
  5:  21  21  21  21  12  10  12  12
  6:  21  21  21  21  12  12  10  12
  7:  21  21  21  21  12  12  12  10

```

```

From /proc/meminfo
MemTotal:          527966104 kB
HugePages_Total:    0
Hugepagesize:       2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"

```

```

uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Dec 21 09:56

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xfs	236G	182G	55G	78%	/

```
From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Product Family: Family
Serial:          0123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology MTC20F2085S1RC48BA1 32 GB 2 rank 4800

BIOS:

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     T20221219103450
BIOS Date:        12/19/2022
BIOS Revision:    5.29
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

### Compiler Version Notes (Continued)

| 544.nab\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

## Compiler Version Notes (Continued)

-----  
=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using both C and C++:  
icpx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

## Base Portability Flags (Continued)

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jun-2022

## Peak Optimization Flags (Continued)

510.parest\_r (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Platinum 8490H)

SPECrate®2017\_fp\_base = 977

SPECrate®2017\_fp\_peak = 1030

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Dec-2022

**Hardware Availability:** Jan-2023

**Software Availability:** Jun-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-21 04:25:35-0500.

Report generated on 2023-02-01 18:32:23 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.