



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix


SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

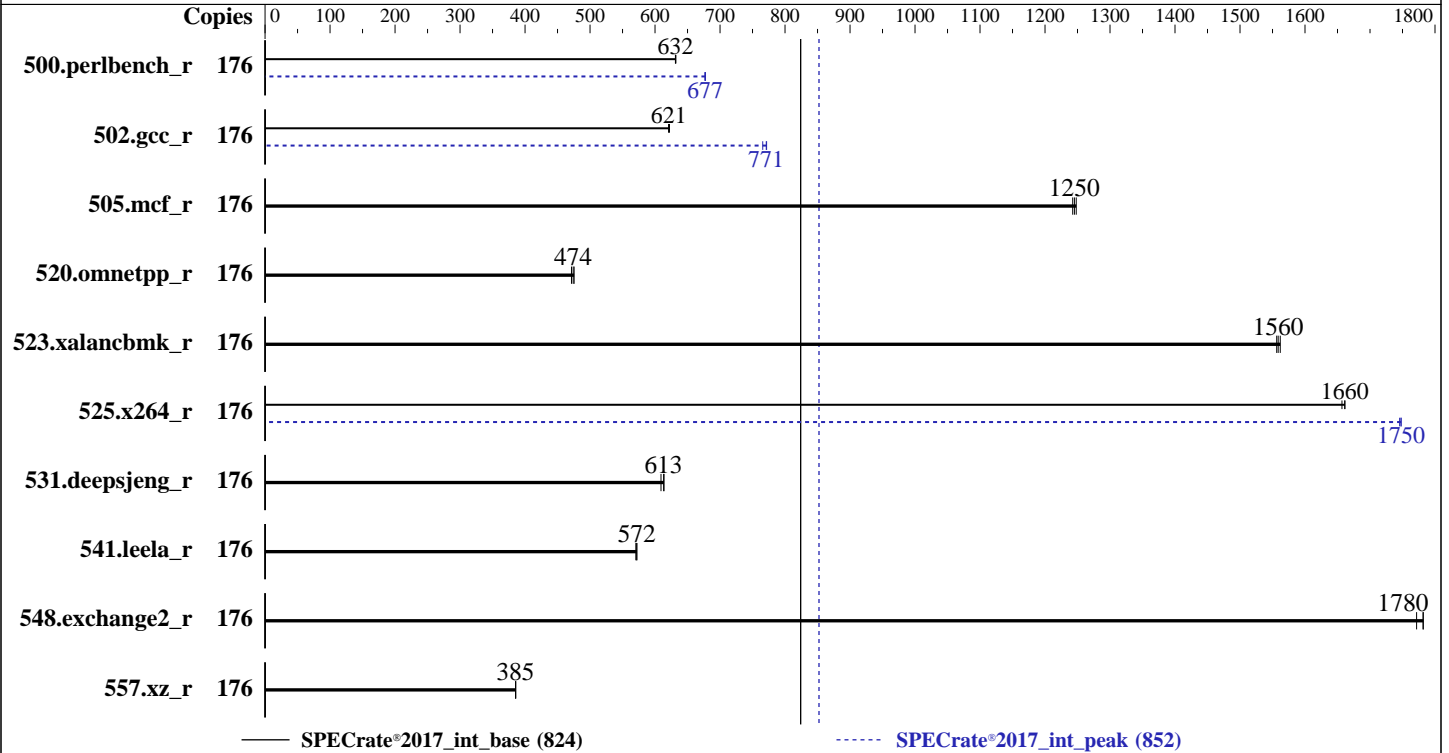

Hardware

CPU Name: Intel Xeon Platinum 8458P
Max MHz: 3800
Nominal: 2700
Enabled: 88 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 82.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 960 GB NVME SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
5.14.21-150400.22-default
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler
for Linux;
Parallel: No
Firmware: Nettrix BIOS Version NNH1041018-U00-1 released
Nov-2022
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	443	632	444	631	444	632	176	414	677	414	678	414	677
502.gcc_r	176	401	621	401	621	401	622	176	325	766	323	772	323	771
505.mcf_r	176	228	1250	229	1240	228	1250	176	228	1250	229	1240	228	1250
520.omnetpp_r	176	487	474	490	471	486	476	176	487	474	490	471	486	476
523.xalancbmk_r	176	119	1560	119	1560	119	1560	176	119	1560	119	1560	119	1560
525.x264_r	176	185	1660	186	1660	186	1660	176	177	1750	176	1750	176	1750
531.deepsjeng_r	176	329	613	331	609	329	614	176	329	613	331	609	329	614
541.leela_r	176	510	572	511	570	510	572	176	510	572	511	570	510	572
548.exchange2_r	176	259	1780	260	1770	259	1780	176	259	1780	260	1770	259	1780
557.xz_r	176	493	386	493	385	493	385	176	493	386	493	385	493	385

SPECrate®2017_int_base = **824**

SPECrate®2017_int_peak = **852**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/lijq/lib/intel64:/home/lijq/lib/ia32:/home/lijq/je5.0.1-32"
MALLOCONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
SNC (Sub NUMA) set to Enable SNC4 (4-clusters)
Patrol Scrub set to Disabled
LLC dead line alloc set to Disabled
DCU Streamer Prefetcher set to Disabled
Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Mar 13 13:01:36 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

-----
2. w
13:01:36 up 1:07, 2 users, load average: 1.75, 69.63, 126.78
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 13:00 40.00s 1.06s 0.01s -bash
root pts/0 10.2.48.216 11:56 30.00s 0.06s 0.06s -bash

-----
3. Username
From environment variable $USER: root

-----
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4125054
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4125054
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
-bash
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --define numcopies=176 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --define numcopies=176
--configfile ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=88 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.061/temlogs/preenv.intrate.061.0.log --lognum 061.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/lijq

-----
6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8458P
vendor_id : GenuineIntel
cpu family : 6
model : 143

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
stepping      : 8
microcode     : 0x2b000111
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 44
siblings      : 88
2 physical ids (chips)
176 processors (hardware threads)
physical id 0: core ids 0-43
physical id 1: core ids 0-43
physical id 0: apicids 0-87
physical id 1: apicids 128-215
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 176
On-line CPU(s) list:   0-175
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8458P
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    44
Socket(s):              2
Stepping:               8
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:               5400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                        erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:         VT-x
L1d cache:              4.1 MiB (88 instances)
L1i cache:              2.8 MiB (88 instances)
L2 cache:               176 MiB (88 instances)
L3 cache:               165 MiB (2 instances)
NUMA node(s):          8
NUMA node0 CPU(s):     0-10,88-98
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node1 CPU(s):      11-21,99-109
NUMA node2 CPU(s):      22-32,110-120
NUMA node3 CPU(s):      33-43,121-131
NUMA node4 CPU(s):      44-54,132-142
NUMA node5 CPU(s):      55-65,143-153
NUMA node6 CPU(s):      66-76,154-164
NUMA node7 CPU(s):      77-87,165-175
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.1M	12	Data	1	64	1	64
L1i	32K	2.8M	8	Instruction	1	64	1	64
L2	2M	176M	16	Unified	2	2048	1	64
L3	82.5M	165M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-10,88-98
node 0 size: 128538 MB
node 0 free: 121425 MB
node 1 cpus: 11-21,99-109
node 1 size: 128983 MB
node 1 free: 124188 MB
node 2 cpus: 22-32,110-120
node 2 size: 129018 MB
node 2 free: 124194 MB
node 3 cpus: 33-43,121-131
node 3 size: 129018 MB
node 3 free: 124191 MB
node 4 cpus: 44-54,132-142
node 4 size: 129018 MB
node 4 free: 124066 MB
node 5 cpus: 55-65,143-153
node 5 size: 129018 MB
node 5 free: 124228 MB
node 6 cpus: 66-76,154-164
node 6 size: 129018 MB
node 6 free: 124165 MB
node 7 cpus: 77-87,165-175
node 7 size: 128671 MB
node 7 free: 122565 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10
```

```
9. /proc/meminfo
MemTotal: 1056036520 kB
```

```
10. who -r
run-level 3 Mar 13 11:55
```

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump
kdump-early nvme-fc-boot-connections postfix purge-kernels rollback sshd wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load
nfs nfs-blkmap nvme-f-autoconnect rpcbind rpmconfigcheck serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd tuned
indirect wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9e7d079b-be10-4779-89e1-79f870e2ca09
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=300M,high
crashkernel=72M,low
```

```
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
```

```
15. tuned-adm active
Current active profile: throughput-performance
```

```
16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/lijq
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/nvme0n1p3  btrfs    854G     316G   538G   37% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          Nettrix
Product:         R620 G50
Product Family:  Rack
Serial:          6101810603447822

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041018-U00-1
BIOS Date: 11/01/2022
BIOS Revision: 5.29

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 824

R620 G50 (Intel Xeon Platinum 8458P, 2.70 GHz)

SPECrate®2017_int_peak = 852

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-13 01:01:35-0400.

Report generated on 2024-01-29 17:28:54 by CPU2017 PDF formatter v6716.

Originally published on 2023-03-28.