



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

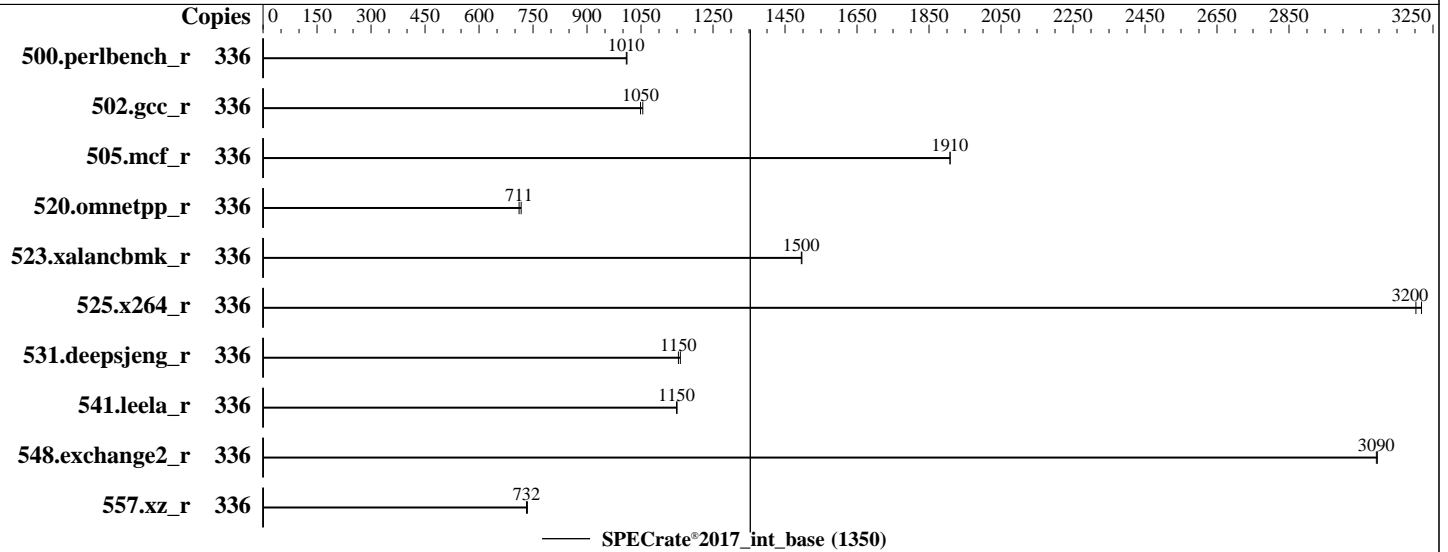

### Hardware

CPU Name: AMD EPYC 9634  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 168 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 7 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 170 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
 5.15.0-46-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.3.8 released Mar-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2023  
Hardware Availability: Mar-2023  
Software Availability: Nov-2022

## Results Table

| Benchmark       | Base   |                   |                    |                   |                    |         |       |        | Peak    |       |         |       |         |       |  |  |
|-----------------|--------|-------------------|--------------------|-------------------|--------------------|---------|-------|--------|---------|-------|---------|-------|---------|-------|--|--|
|                 | Copies | Seconds           | Ratio              | Seconds           | Ratio              | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |  |  |
| 500.perlbench_r | 336    | 529               | 1010               | <b><u>530</u></b> | <b><u>1010</u></b> |         |       |        |         |       |         |       |         |       |  |  |
| 502.gcc_r       | 336    | 451               | 1050               | <b><u>454</u></b> | <b><u>1050</u></b> |         |       |        |         |       |         |       |         |       |  |  |
| 505.mcf_r       | 336    | <b><u>285</u></b> | <b><u>1910</u></b> | 284               | 1910               |         |       |        |         |       |         |       |         |       |  |  |
| 520.omnetpp_r   | 336    | <b><u>620</u></b> | <b><u>711</u></b>  | 615               | 717                |         |       |        |         |       |         |       |         |       |  |  |
| 523.xalancbmk_r | 336    | <b><u>237</u></b> | <b><u>1500</u></b> | 237               | 1500               |         |       |        |         |       |         |       |         |       |  |  |
| 525.x264_r      | 336    | <b><u>184</u></b> | <b><u>3200</u></b> | 183               | 3220               |         |       |        |         |       |         |       |         |       |  |  |
| 531.deepsjeng_r | 336    | <b><u>334</u></b> | <b><u>1150</u></b> | 332               | 1160               |         |       |        |         |       |         |       |         |       |  |  |
| 541.leela_r     | 336    | <b><u>484</u></b> | <b><u>1150</u></b> | 484               | 1150               |         |       |        |         |       |         |       |         |       |  |  |
| 548.exchange2_r | 336    | <b><u>285</u></b> | <b><u>3090</u></b> | 284               | 3100               |         |       |        |         |       |         |       |         |       |  |  |
| 557.xz_r        | 336    | <b><u>496</u></b> | <b><u>732</u></b>  | 494               | 734                |         |       |        |         |       |         |       |         |       |  |  |

SPECrate®2017\_int\_base = 1350

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_rate_aocc400_genoa_B_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 170 GB ramdisk created with the cmd: "mount -t tmpfs -o size=170G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 4
L3 Cache as NUMA Domain : Enabled
```

```
System Profile : Custom
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on genoa-sut Mon Mar 27 20:02:04 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux genoa-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:02:04 up 58 min, 1 user, load average: 0.25, 0.07, 0.02
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1    -             19:47       34.00s     1.98s     0.34s    /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6190183
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-specrate.sh --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --nopower --runmode rate --tune base --size
test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9634 84-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 84
siblings       : 168
2 physical ids (chips)
336 processors (hardware threads)
physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 1: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 0: apicids 0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189
physical id 1: apicids
256-269,272-285,288-301,304-317,320-333,336-349,352-365,368-381,384-397,400-413,416-429,432-445
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

### 7. lscpu

```
-----
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                336
On-line CPU(s) list:  0-335
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9634 84-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   84
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU max MHz:           3701.0000
CPU min MHz:           400.0000
BogoMIPS:              4501.13
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

pausefilter pfthreshold avic v\_vmsave\_vmload vgif v\_spec\_ctrl avx512vbmi  
umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg  
avx512\_vpopcntdq la57 rdpid overflow\_recov succor smca fsrm flush\_lld  
AMD-V

### Virtualization:

L1d cache: 5.3 MiB (168 instances)  
L1i cache: 5.3 MiB (168 instances)  
L2 cache: 168 MiB (168 instances)  
L3 cache: 768 MiB (24 instances)

### NUMA node(s):

24  
NUMA node0 CPU(s): 0-6,168-174  
NUMA node1 CPU(s): 28-34,196-202  
NUMA node2 CPU(s): 56-62,224-230  
NUMA node3 CPU(s): 14-20,182-188  
NUMA node4 CPU(s): 42-48,210-216  
NUMA node5 CPU(s): 70-76,238-244  
NUMA node6 CPU(s): 21-27,189-195  
NUMA node7 CPU(s): 49-55,217-223  
NUMA node8 CPU(s): 77-83,245-251  
NUMA node9 CPU(s): 7-13,175-181  
NUMA node10 CPU(s): 35-41,203-209  
NUMA node11 CPU(s): 63-69,231-237  
NUMA node12 CPU(s): 84-90,252-258  
NUMA node13 CPU(s): 112-118,280-286  
NUMA node14 CPU(s): 140-146,308-314  
NUMA node15 CPU(s): 98-104,266-272  
NUMA node16 CPU(s): 126-132,294-300  
NUMA node17 CPU(s): 154-160,322-328  
NUMA node18 CPU(s): 105-111,273-279  
NUMA node19 CPU(s): 133-139,301-307  
NUMA node20 CPU(s): 161-167,329-335  
NUMA node21 CPU(s): 91-97,259-265  
NUMA node22 CPU(s): 119-125,287-293  
NUMA node23 CPU(s): 147-153,315-321

Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

### From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 32K      | 5.3M     | 8    | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 5.3M     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 168M     | 8    | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 32M      | 768M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 24 nodes (0-23)  
node 0 cpus: 0-6,168-174  
node 0 size: 64054 MB  
node 0 free: 63738 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```

node 1 cpus: 28-34,196-202
node 1 size: 64508 MB
node 1 free: 64292 MB
node 2 cpus: 56-62,224-230
node 2 size: 64507 MB
node 2 free: 64293 MB
node 3 cpus: 14-20,182-188
node 3 size: 64508 MB
node 3 free: 64287 MB
node 4 cpus: 42-48,210-216
node 4 size: 64508 MB
node 4 free: 64295 MB
node 5 cpus: 70-76,238-244
node 5 size: 64507 MB
node 5 free: 64290 MB
node 6 cpus: 21-27,189-195
node 6 size: 64508 MB
node 6 free: 64235 MB
node 7 cpus: 49-55,217-223
node 7 size: 64508 MB
node 7 free: 64221 MB
node 8 cpus: 77-83,245-251
node 8 size: 64507 MB
node 8 free: 64239 MB
node 9 cpus: 7-13,175-181
node 9 size: 64508 MB
node 9 free: 64291 MB
node 10 cpus: 35-41,203-209
node 10 size: 64508 MB
node 10 free: 64302 MB
node 11 cpus: 63-69,231-237
node 11 size: 64491 MB
node 11 free: 64278 MB
node 12 cpus: 84-90,252-258
node 12 size: 64508 MB
node 12 free: 64291 MB
node 13 cpus: 112-118,280-286
node 13 size: 64508 MB
node 13 free: 64270 MB
node 14 cpus: 140-146,308-314
node 14 size: 64507 MB
node 14 free: 64269 MB
node 15 cpus: 98-104,266-272
node 15 size: 64508 MB
node 15 free: 64272 MB
node 16 cpus: 126-132,294-300
node 16 size: 64508 MB
node 16 free: 64279 MB
node 17 cpus: 154-160,322-328
node 17 size: 64507 MB
node 17 free: 64288 MB
node 18 cpus: 105-111,273-279
node 18 size: 64508 MB
node 18 free: 64298 MB
node 19 cpus: 133-139,301-307
node 19 size: 64473 MB
node 19 free: 64249 MB
node 20 cpus: 161-167,329-335
node 20 size: 64507 MB
node 20 free: 64286 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

node 21 cpus: 91-97,259-265
node 21 size: 64508 MB
node 21 free: 64190 MB
node 22 cpus: 119-125,287-293
node 22 size: 64508 MB
node 22 free: 60634 MB
node 23 cpus: 147-153,315-321
node 23 size: 64476 MB
node 23 free: 64118 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
0: 10 11 11 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
3: 12 12 12 10 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 11 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 11 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 12 12 12 10 11 11 12 12 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 12 12 11 10 11 12 12 12 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 11 11 10 12 12 12 32 32 32 32 32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 10 11 11 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 11 10 11 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32 32 32 32 32 32 32 32
12: 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 12 12 12 12 12 12 12 12
13: 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 12 12 12 12 12 12 12 12
14: 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 12 12 12 12 12 12 12 12
15: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 10 11 11 12 12 12 12 12
16: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 11 10 11 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 11 11 10 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11 11 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10 11 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 11 10 12 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10 11 12 12 12
22: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 11 10 11 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 11 11 10 10

```

```

9. /proc/meminfo
MemTotal: 1584800772 kB

```

```

10. who -r
run-level 3 Mar 27 19:04

```

```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
Default Target Status
multi-user      running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager blk-availability cloud-config cloud-final cloud-init cloud-init-local
console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback
irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent networkd-dispatcher open-iscsi
open-vm-tools pollinate rsync rsyslog secureboot-db setvtrgb ssh systemd-networkd
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
tuned ua-reboot-cmds ubuntu-advantage udisks2 vgauth
enabled-runtime netplan-ovs-cleanup rc-local systemd-remount-fs
disabled apparmor console-getty debug-shell iscsid multipathd nftables powertop serial-getty@

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```

smartmontools sysstat systemd-boot-check-no-failures systemd-network-generator
systemd-sysexct systemd-time-wait-sync ufw upower
generated          uidd
indirect           uidd
masked            accounts-daemon alsa-utils atd cryptdisks cryptdisks-early gpu-manager hwclock lvm2
                  multipath-tools-boot rc rcS screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-46-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 400 MHz and 3.70 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2250MHz

```

```

-----
15. tuned-adm active
  Current active profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.1 LTS

```

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble

```

Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 170G 3.5G 167G 3% /mnt/ramdisk

```

21. /sys/devices/virtual/dmi/id

```

Vendor: Dell Inc.
Product: PowerEdge R6625
Product Family: PowerEdge
Serial: BGP4016

```

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
24x 802C0000802C MTC40F2046SIRC48BA1 64 GB 2 rank 4800

```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: Dell Inc.
BIOS Version: 1.3.8
BIOS Date: 03/10/2023
BIOS Revision: 1.3

```

## Compiler Version Notes

```

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
-----
Fortran | 548.exchange2_r(base)
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2017\_int\_base = 1350

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECrate<sup>®</sup>2017\_int\_peak = Not Run

**CPU2017 License:** 6573

**Test Date:** Mar-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Mar-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2023-03-27 16:02:04-0400.

Report generated on 2023-05-09 15:56:53 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.