



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

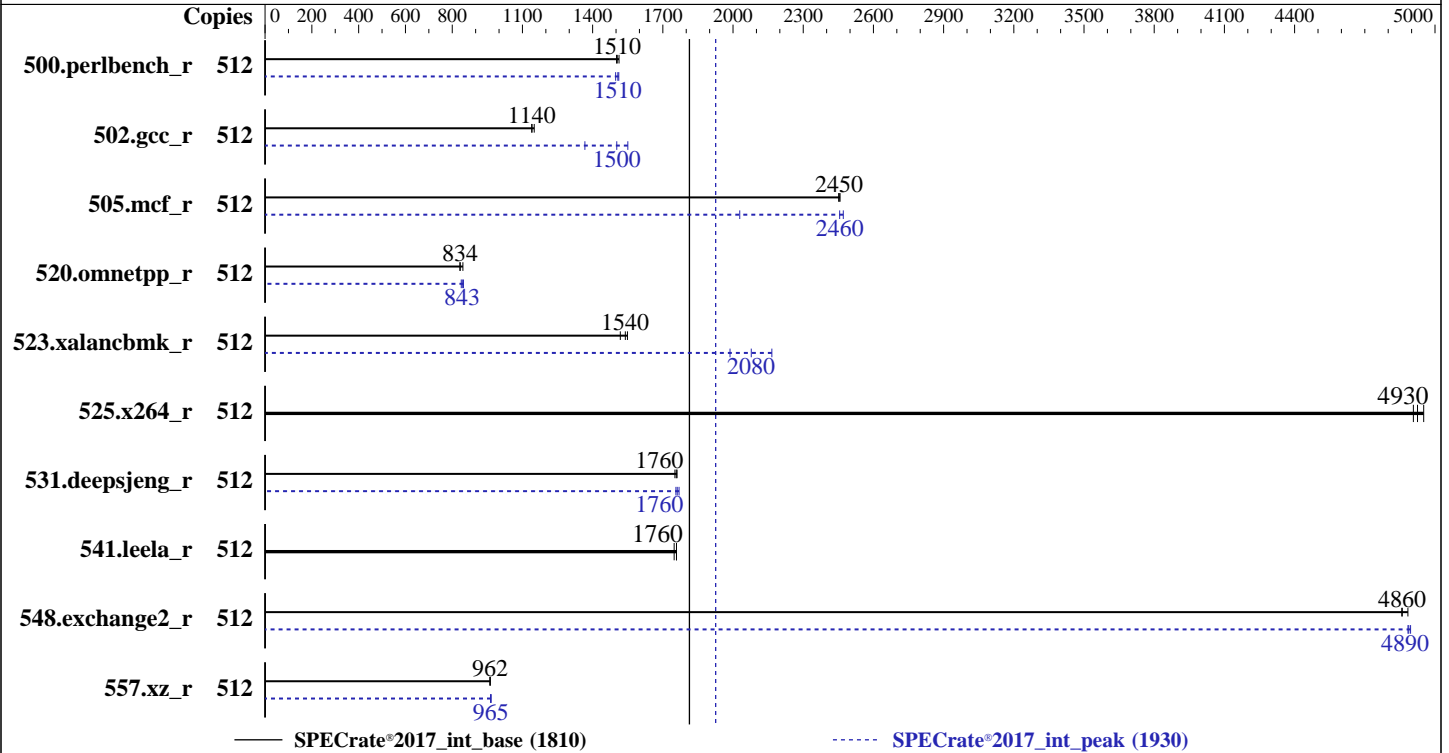

Hardware

CPU Name: AMD EPYC 9754
 Max MHz: 3100
 Nominal: 2250
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version v1.30 03/06/2023 released
 Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	512	542	1510	539	1510	543	1500	512	544	1500	541	1510	539	1510
502.gcc_r	512	630	1150	636	1140	636	1140	512	468	1550	482	1500	530	1370
505.mcf_r	512	337	2450	337	2460	338	2450	512	408	2030	335	2470	337	2460
520.omnetpp_r	512	805	834	794	846	807	833	512	792	848	801	839	797	843
523.xalancbmk_r	512	349	1550	351	1540	356	1520	512	260	2080	250	2170	272	1990
525.x264_r	512	182	4930	181	4950	183	4910	512	182	4930	181	4950	183	4910
531.deepsjeng_r	512	333	1760	335	1750	334	1760	512	332	1770	334	1760	333	1760
541.leela_r	512	485	1750	482	1760	482	1760	512	485	1750	482	1760	482	1760
548.exchange2_r	512	275	4880	276	4860	276	4860	512	275	4880	274	4890	274	4900
557.xz_r	512	575	961	575	962	575	962	512	573	965	573	966	574	964

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Data Fabric C-State Enable set to Force Enabled

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu May 18 15:28:18 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

```

```

-----
2. w
15:28:18 up 4 min, 0 users, load average: 0.10, 0.12, 0.06
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 6190826
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 6190826
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 27
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intrate.sh
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

6. /proc/cpuinfo

```

model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 128
siblings      : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                512
On-line CPU(s) list:  0-511
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9754 128-Core Processor
BIOS Model name:      AMD EPYC 9754 128-Core Processor
CPU family:            25
Model:                 160
Thread(s) per core:   2
Core(s) per socket:   128
Socket(s):             2
Stepping:              2
Frequency boost:      enabled
CPU max MHz:           2250.0000
CPU min MHz:           1500.0000
BogoMIPS:              4493.33
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                    constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                    popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                    abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                    perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                    invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                    avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                    svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                    pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                    umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

Virtualization:
L1d cache:
L1i cache:
L2 cache:
L3 cache:
NUMA node(s):
NUMA node0 CPU(s):
NUMA node1 CPU(s):
NUMA node2 CPU(s):
NUMA node3 CPU(s):
NUMA node4 CPU(s):
NUMA node5 CPU(s):
NUMA node6 CPU(s):
NUMA node7 CPU(s):
NUMA node8 CPU(s):
NUMA node9 CPU(s):
NUMA node10 CPU(s):
NUMA node11 CPU(s):
NUMA node12 CPU(s):
NUMA node13 CPU(s):
NUMA node14 CPU(s):
NUMA node15 CPU(s):
NUMA node16 CPU(s):
NUMA node17 CPU(s):
NUMA node18 CPU(s):
NUMA node19 CPU(s):
NUMA node20 CPU(s):
NUMA node21 CPU(s):
NUMA node22 CPU(s):
NUMA node23 CPU(s):
NUMA node24 CPU(s):
NUMA node25 CPU(s):
NUMA node26 CPU(s):
NUMA node27 CPU(s):
NUMA node28 CPU(s):
NUMA node29 CPU(s):
NUMA node30 CPU(s):
NUMA node31 CPU(s):
Vulnerability Itlb multihit:
Vulnerability L1tf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:
Vulnerability Srbds:
Vulnerability Tsx async abort:

```

avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_llid
AMD-V
8 MiB (256 instances)
8 MiB (256 instances)
256 MiB (256 instances)
512 MiB (32 instances)
32
0-7,256-263
8-15,264-271
64-71,320-327
72-79,328-335
32-39,288-295
40-47,296-303
96-103,352-359
104-111,360-367
48-55,304-311
56-63,312-319
112-119,368-375
120-127,376-383
16-23,272-279
24-31,280-287
80-87,336-343
88-95,344-351
128-135,384-391
136-143,392-399
192-199,448-455
200-207,456-463
160-167,416-423
168-175,424-431
224-231,480-487
232-239,488-495
176-183,432-439
184-191,440-447
240-247,496-503
248-255,504-511
144-151,400-407
152-159,408-415
208-215,464-471
216-223,472-479
Not affected
Not affected
Not affected
Not affected
Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swaps barriers and __user pointer sanitization
Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

available: 32 nodes (0-31)
node 0 cpus: 0-7,256-263
node 0 size: 48134 MB
node 0 free: 47289 MB
node 1 cpus: 8-15,264-271
node 1 size: 48380 MB
node 1 free: 48023 MB
node 2 cpus: 16-23,272-279
node 2 size: 48380 MB
node 2 free: 47778 MB
node 3 cpus: 24-31,280-287
node 3 size: 48380 MB
node 3 free: 48061 MB
node 4 cpus: 32-39,288-295
node 4 size: 48380 MB
node 4 free: 48089 MB
node 5 cpus: 40-47,296-303
node 5 size: 48380 MB
node 5 free: 48107 MB
node 6 cpus: 48-55,304-311
node 6 size: 48380 MB
node 6 free: 48221 MB
node 7 cpus: 56-63,312-319
node 7 size: 48380 MB
node 7 free: 48169 MB
node 8 cpus: 64-71,320-327
node 8 size: 48380 MB
node 8 free: 48220 MB
node 9 cpus: 72-79,328-335
node 9 size: 48380 MB
node 9 free: 48247 MB
node 10 cpus: 80-87,336-343
node 10 size: 48380 MB
node 10 free: 48105 MB
node 11 cpus: 88-95,344-351
node 11 size: 48380 MB
node 11 free: 48119 MB
node 12 cpus: 96-103,352-359
node 12 size: 48380 MB
node 12 free: 48058 MB
node 13 cpus: 104-111,360-367
node 13 size: 48380 MB
node 13 free: 48252 MB
node 14 cpus: 112-119,368-375
node 14 size: 48380 MB
node 14 free: 48130 MB
node 15 cpus: 120-127,376-383
node 15 size: 48344 MB
node 15 free: 48038 MB
node 16 cpus: 128-135,384-391
node 16 size: 48380 MB
node 16 free: 48057 MB
node 17 cpus: 136-143,392-399
node 17 size: 48380 MB
node 17 free: 48127 MB
node 18 cpus: 144-151,400-407
node 18 size: 48380 MB
node 18 free: 48229 MB
node 19 cpus: 152-159,408-415
node 19 size: 48380 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

node 19 free: 48091 MB
node 20 cpus: 160-167,416-423
node 20 size: 48380 MB
node 20 free: 48095 MB
node 21 cpus: 168-175,424-431
node 21 size: 48380 MB
node 21 free: 48096 MB
node 22 cpus: 224-231,480-487
node 22 size: 48380 MB
node 22 free: 48142 MB
node 23 cpus: 232-239,488-495
node 23 size: 48380 MB
node 23 free: 48094 MB
node 24 cpus: 176-183,432-439
node 24 size: 48380 MB
node 24 free: 48115 MB
node 25 cpus: 184-191,440-447
node 25 size: 48380 MB
node 25 free: 47968 MB
node 26 cpus: 240-247,496-503
node 26 size: 48380 MB
node 26 free: 47660 MB
node 27 cpus: 248-255,504-511
node 27 size: 48380 MB
node 27 free: 48107 MB
node 28 cpus: 144-151,400-407
node 28 size: 48380 MB
node 28 free: 48245 MB
node 29 cpus: 152-159,408-415
node 29 size: 48380 MB
node 29 free: 48253 MB
node 30 cpus: 208-215,464-471
node 30 size: 48380 MB
node 30 free: 48249 MB
node 31 cpus: 216-223,472-479
node 31 size: 48298 MB
node 31 free: 48146 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

10: 12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12 12 32 32 32 32 32 32 32
32 32 32 32 32 32 32 12 12 11 11 11 10 12 12 12 12 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 12 32 32 32 32 32 32
32 32 32 32 32 32 12 12 12 12 12 12 10 11 11 11 32 32 32 32 32 32 32
12: 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11 32 32 32 32 32 32 32
32 32 32 32 32 32 12 12 12 12 12 12 11 10 11 11 32 32 32 32 32 32 32
13: 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11 32 32 32 32 32 32 32
32 32 32 32 32 32 12 12 12 12 12 12 11 11 10 11 32 32 32 32 32 32 32
14: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11 32 32 32 32 32 32 32
32 32 32 32 32 32 12 12 12 12 12 12 11 11 11 10 32 32 32 32 32 32 32
15: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10 32 32 32 32 32 32 32
32 32 32 32 32 32 12 12 12 12 12 12 11 11 11 10 32 32 32 32 32 32 32
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 12 12
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 12 12
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 12 12
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11
12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11
24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 10
11 11 11 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 10
25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11
10 11 11 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11
26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11
11 10 11 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11
27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11
11 11 10 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
12 12 12 10 11 11 11 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
12 12 12 11 10 11 11 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
12 12 12 11 11 10 11 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12
12 12 12 11 11 11 10

```

```

9. /proc/meminfo
MemTotal: 1584958752 kB

```

```

10. who -r
run-level 3 May 18 15:24

```

```

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user running

```

```

12. Services, from systemctl list-unit-files

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait chronyd console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
 BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
 root=/dev/mapper/rhel-root
 ro
 resume=/dev/mapper/rhel-swap
 rd.lvm.lv=rhel/root
 rd.lvm.lv=rhel/swap

14. cpupower frequency-info
 analyzing CPU 0:
 current policy: frequency should be within 1.50 GHz and 2.25 GHz.
 The governor "performance" may decide which speed to use
 within this range.

boost state support:
 Supported: yes
 Active: yes
 Boost States: 0
 Total States: 3
 Pstate-P0: 2250MHz

15. tuned-adm active
 Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage
   defrag          [always] defer defer+madvise madvise never
   enabled         [always] madvise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap           64
   pages_to_scan          4096
   scan_sleep_millisecs   10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
   system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem      Type      Size  Used Avail Use% Mounted on
 /dev/mapper/rhel-home xfs      372G  9.2G  363G   3% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:      HPE
   Product:     ProLiant DL365 Gen11
   Product Family: ProLiant
   Serial:      DL365G11-001

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
  8x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      HPE
  BIOS Version:     1.30
  BIOS Date:        03/06/2023
  BIOS Revision:    1.30
  Firmware Revision: 1.10

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Compiler Version Notes

=====
C | 502.gcc_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C | 502.gcc_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++ | 523.xalancbmk_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
| peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++ | 523.xalancbmk_r(peak)
=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-faggressive-loop-transform -fvector-transform
-fscalar-transform -lamdlibm -lflang -lamdalloc

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

502.gcc_r (continued):

-lamdalloc

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver4 -fveclib=AMDLIBM -ffast-math

-fstruct-layout=7 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -zopt -lamdlibm

-lflang -lamdalloc

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver4 -fveclib=AMDLIBM -ffast-math

-finline-aggressive -mllvm -unroll-threshold=100

-mllvm -reduce-array-computations=3 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-lamdlibm -lamdalloc-ext

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=aggressive

-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM

-ffast-math -finline-aggressive

-mllvm -unroll-threshold=100

-mllvm -reduce-array-computations=3 -zopt

-mllvm -do-block-reorder=aggressive

-fvirtual-function-elimination -fvisibility=hidden

-lamdalloc-ext

531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3

-march=znver4 -fveclib=AMDLIBM -ffast-math

-mllvm -unroll-threshold=100 -finline-aggressive

-mllvm -loop-unswitch-threshold=200000

-mllvm -reduce-array-computations=3 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-lamdlibm -lamdalloc-ext

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2017_int_base = 1810

SPECrate®2017_int_peak = 1930

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-18 05:58:18-0400.

Report generated on 2023-06-13 15:16:30 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-13.