



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECSpeed®2017_fp_peak = Not Run

CPU2017 License: 6573


Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

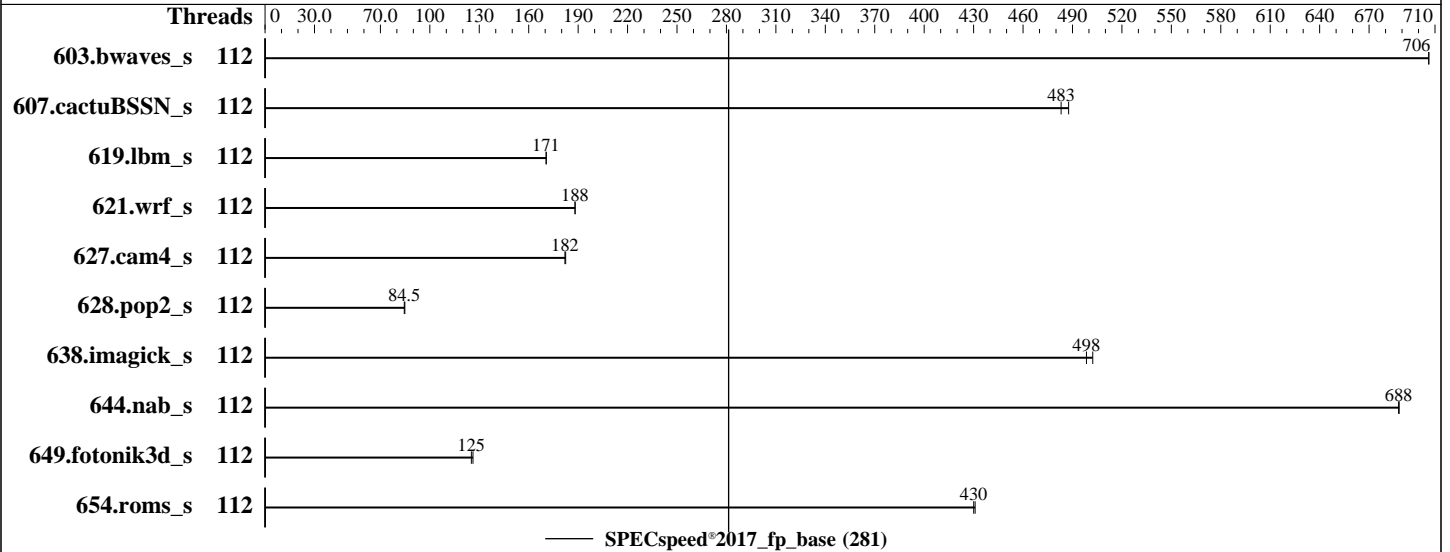

Hardware

CPU Name: AMD EPYC 9734
 Max MHz: 3000
 Nominal: 2200
 Enabled: 112 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 7 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 80 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 5.15.0-46-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.4.1 released Apr-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	83.5	706	83.5	706									
607.cactuBSSN_s	112	34.5	483	34.2	488									
619.lbm_s	112	30.7	171	30.7	171									
621.wrf_s	112	70.3	188	70.3	188									
627.cam4_s	112	48.7	182	48.6	182									
628.pop2_s	112	141	84.5	140	84.8									
638.imagick_s	112	28.7	502	28.9	498									
644.nab_s	112	25.4	688	25.4	688									
649.fotonik3d_s	112	72.8	125	72.2	126									
654.roms_s	112	36.6	430	36.5	431									

SPECspeed®2017_fp_base = 281

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

```
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-111"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "112"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

```
BIOS settings:
  DRAM Refresh Delay : Performance
  DIMM Self Healing on
  Uncorrectable Memory Error : Disabled
  Logical Processor : Disabled
  Virtualization Technology : Disabled
  L3 Cache as NUMA Domain : Enabled

  System Profile : Custom
  C-States : Disabled
  Memory Patrol Scrub : Disabled
  PCI ASPM L1 Link
  Power Management : Disabled
  Determinism Slider : Power Determinism
  Algorithm Performance
  Boost Disable (ApbDis) : Enabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/bin/sysinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-sut Fri May 19 10:52:55 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
10:52:55 up 1:47, 1 user, load average: 5.57, 6.40, 3.71
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1     -             09:24       1:28m      2.36s     0.48s    /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093858
nofiles            1024
vmemory(kbytes)    unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

locks unlimited
rtprio 0

```

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-VERS=v4.5 --output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 --define
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-VERS=v4.5 --output_format html,pdf,txt fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 --define
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-VERS=v4.5 --output_format html,pdf,txt --nopower --runmode speed --tune base
--size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9734 112-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00208
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 112
siblings      : 112
1 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
physical id 0: apicids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: AuthenticAMD

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

Model name: AMD EPYC 9734 112-Core Processor
CPU family: 25
Model: 160
Thread(s) per core: 1
Core(s) per socket: 112
Socket(s): 1
Stepping: 2
Frequency boost: enabled
CPU max MHz: 3000.0000
CPU min MHz: 400.0000
BogoMIPS: 4400.93
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
AMD-V
Virtualization:
L1d cache: 3.5 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 112 MiB (112 instances)
L3 cache: 256 MiB (16 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0-6
NUMA node1 CPU(s): 7-13
NUMA node2 CPU(s): 56-62
NUMA node3 CPU(s): 63-69
NUMA node4 CPU(s): 28-34
NUMA node5 CPU(s): 35-41
NUMA node6 CPU(s): 84-90
NUMA node7 CPU(s): 91-97
NUMA node8 CPU(s): 42-48
NUMA node9 CPU(s): 49-55
NUMA node10 CPU(s): 98-104
NUMA node11 CPU(s): 105-111
NUMA node12 CPU(s): 14-20
NUMA node13 CPU(s): 21-27
NUMA node14 CPU(s): 70-76
NUMA node15 CPU(s): 77-83
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling
Vulnerability Srbds: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3.5M	8	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	1M	112M	8	Unified	2	2048	1	64
L3	16M	256M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-6

node 0 size: 47928 MB

node 0 free: 47744 MB

node 1 cpus: 7-13

node 1 size: 48382 MB

node 1 free: 48054 MB

node 2 cpus: 56-62

node 2 size: 48382 MB

node 2 free: 47069 MB

node 3 cpus: 63-69

node 3 size: 48382 MB

node 3 free: 48170 MB

node 4 cpus: 28-34

node 4 size: 48382 MB

node 4 free: 48078 MB

node 5 cpus: 35-41

node 5 size: 48382 MB

node 5 free: 47728 MB

node 6 cpus: 84-90

node 6 size: 48382 MB

node 6 free: 48149 MB

node 7 cpus: 91-97

node 7 size: 48382 MB

node 7 free: 48179 MB

node 8 cpus: 42-48

node 8 size: 48382 MB

node 8 free: 48062 MB

node 9 cpus: 49-55

node 9 size: 48382 MB

node 9 free: 48199 MB

node 10 cpus: 98-104

node 10 size: 48382 MB

node 10 free: 47092 MB

node 11 cpus: 105-111

node 11 size: 48332 MB

node 11 free: 48115 MB

node 12 cpus: 14-20

node 12 size: 48382 MB

node 12 free: 46492 MB

node 13 cpus: 21-27

node 13 size: 48382 MB

node 13 free: 48203 MB

node 14 cpus: 70-76

node 14 size: 48382 MB

node 14 free: 48146 MB

node 15 cpus: 77-83

node 15 size: 48346 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

node 15 free: 48129 MB

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
1:	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11
2:	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11
3:	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11
4:	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11
5:	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11
6:	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11
7:	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11
8:	11	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11
9:	11	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11
10:	11	11	11	11	11	11	11	11	11	10	11	11	11	11	11	11
11:	11	11	11	11	11	11	11	11	11	11	10	11	11	11	11	11
12:	11	11	11	11	11	11	11	11	11	11	11	10	11	11	11	11
13:	11	11	11	11	11	11	11	11	11	11	11	11	10	11	11	11
14:	11	11	11	11	11	11	11	11	11	11	11	11	11	10	11	11
15:	11	11	11	11	11	11	11	11	11	11	11	11	11	11	10	11

9. /proc/meminfo
MemTotal: 792141560 kB

10. who -r
run-level 3 May 19 09:07

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled blk-availability console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 vgaauth wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-networkd-wait-online systemd-remount-fs
disabled ModemManager apparmor console-getty debug-shell iscsid lvm2-monitor lxd-agent multipathd nftables rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync ufw upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated apport
indirect uidd
masked NetworkManager NetworkManager-dispatcher NetworkManager-wait-online cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-46-generic

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```
root=UUID=593ab29a-c8fe-4d75-821a-b60d5c945311
ro
```

15. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 400 MHz and 3.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2200MHz
```

16. tuned-adm active

```
Current active profile: latency-performance
```

17. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

18. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

20. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.1 LTS

21. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 3.5G 77G 5% /mnt/ramdisk

22. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R6615
Product Family: PowerEdge
Serial: GLM4030

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.4.1
BIOS Date: 04/21/2023
BIOS Revision: 1.4

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 281

PowerEdge R6615 (AMD EPYC 9734 112-Core Processor)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-19 06:52:55-0400.

Report generated on 2023-06-13 15:17:21 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-13.