



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd. i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708 SPECrate®2017_fp_peak = 773

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

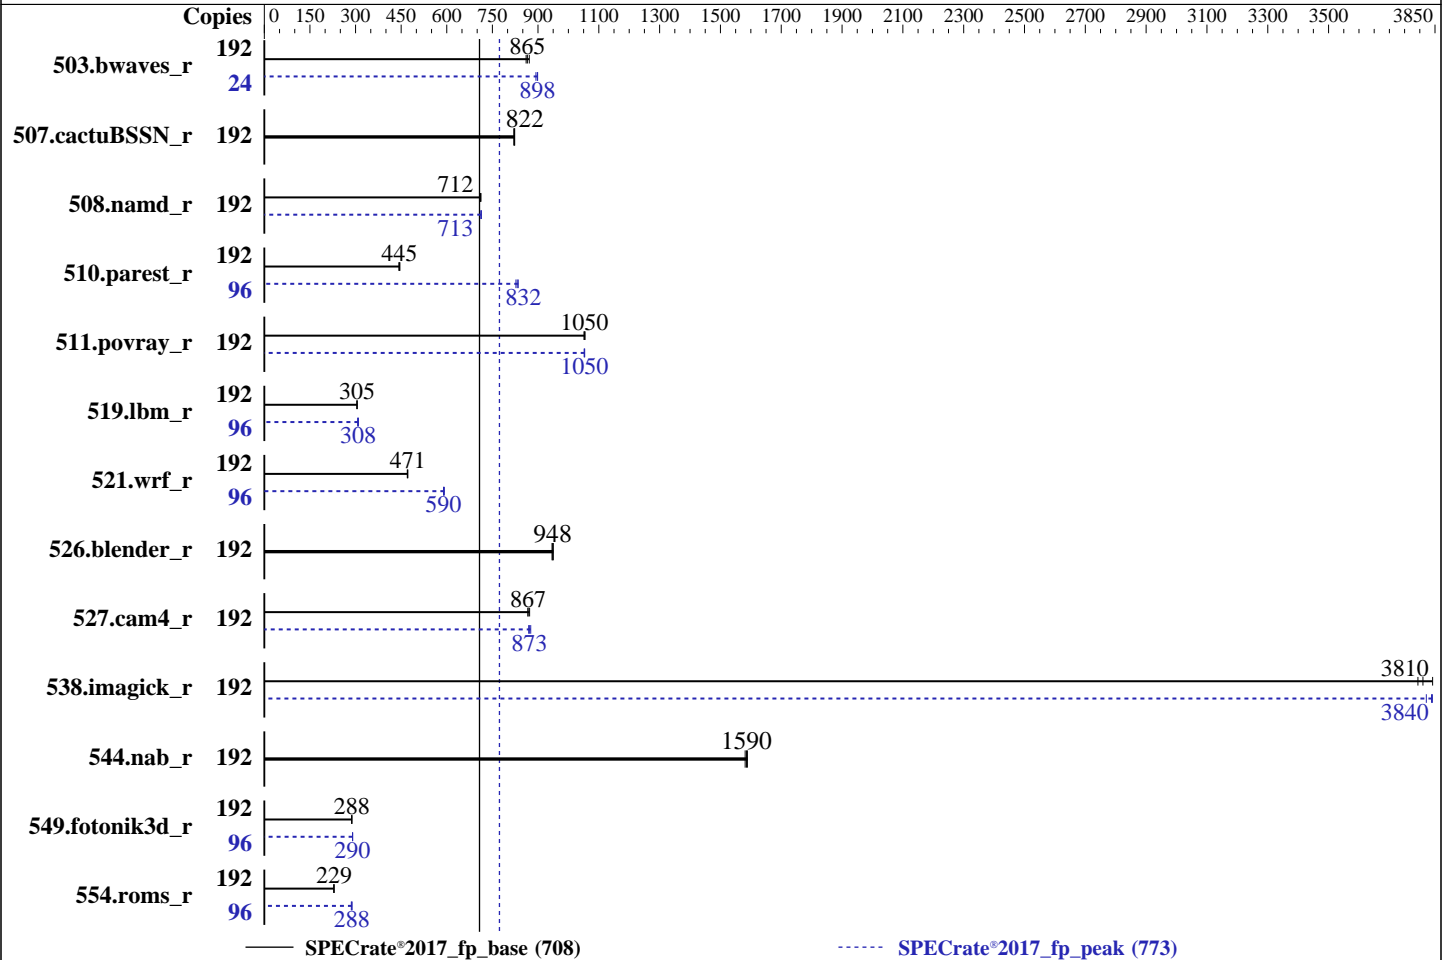

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 96 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 03.09.01 released Sep-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	<u>2226</u>	<u>865</u>	2210	871	2236	861	24	<u>268</u>	<u>898</u>	268	899	269	893
507.cactuBSSN_r	192	296	820	295	823	<u>296</u>	<u>822</u>	192	296	820	295	823	<u>296</u>	<u>822</u>
508.namd_r	192	257	711	<u>256</u>	<u>712</u>	256	712	192	256	712	256	713	<u>256</u>	<u>713</u>
510.parest_r	192	<u>1129</u>	<u>445</u>	1135	442	1127	446	96	301	835	<u>302</u>	<u>832</u>	304	827
511.povray_r	192	425	1050	426	1050	<u>426</u>	<u>1050</u>	192	426	1050	<u>426</u>	<u>1050</u>	425	1050
519.lbm_r	192	<u>663</u>	<u>305</u>	664	305	663	305	96	330	307	327	309	<u>328</u>	<u>308</u>
521.wrf_r	192	915	470	<u>912</u>	<u>471</u>	912	472	96	<u>365</u>	<u>590</u>	365	589	363	592
526.blender_r	192	<u>308</u>	<u>948</u>	308	950	309	946	192	<u>308</u>	<u>948</u>	308	950	309	946
527.cam4_r	192	385	872	387	867	<u>387</u>	<u>867</u>	192	383	876	<u>385</u>	<u>873</u>	386	869
538.imagick_r	192	126	3790	124	3840	<u>125</u>	<u>3810</u>	192	125	3820	124	3840	<u>124</u>	<u>3840</u>
544.nab_r	192	203	1590	<u>204</u>	<u>1590</u>	204	1580	192	203	1590	<u>204</u>	<u>1590</u>	204	1580
549.fotonik3d_r	192	2601	288	<u>2602</u>	<u>288</u>	2602	288	96	<u>1289</u>	<u>290</u>	1290	290	1289	290
554.roms_r	192	1335	228	<u>1331</u>	<u>229</u>	1331	229	96	<u>530</u>	<u>288</u>	533	286	529	288

SPECrate®2017_fp_base = **708**

SPECrate®2017_fp_peak = **773**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

System date was wrongly set. The actual date is Oct-2023

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib:/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
SVM Mode = disable
DRAM Scrub time = disable
NUMA nodes per socket = NPS4
Determinism Slider = Power
cTDP = 400
Package Power Limit = 400

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Apr 7 01:46:51 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
01:46:51 up 5:46, 1 user, load average: 103.45, 168.48, 181.51
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     20:00    5:46m  1.43s  0.29s  /bin/bash ./amd_rate_aocc400_genoa_B1.sh
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1546215
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1546215
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 27
login -- root
-bash
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.011/templogs/preenv.fprate.011.0.log --lognum 011.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708

SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

\$SPEC = /home/CPU2017

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
cpu family      : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 96
siblings       : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-95
physical id 0: apicids 0-191

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9654 96-Core Processor
BIOS Model name:      AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:          3707.8120
CPU min MHz:           1500.0000
BogoMIPS:              4792.73
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd. i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708

SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

Virtualization: avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V
L1d cache: 3 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 12
NUMA node0 CPU(s): 0-7,96-103
NUMA node1 CPU(s): 8-15,104-111
NUMA node2 CPU(s): 16-23,112-119
NUMA node3 CPU(s): 24-31,120-127
NUMA node4 CPU(s): 32-39,128-135
NUMA node5 CPU(s): 40-47,136-143
NUMA node6 CPU(s): 48-55,144-151
NUMA node7 CPU(s): 56-63,152-159
NUMA node8 CPU(s): 64-71,160-167
NUMA node9 CPU(s): 72-79,168-175
NUMA node10 CPU(s): 80-87,176-183
NUMA node11 CPU(s): 88-95,184-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 32K 3M 8 Data 1 64 1 64
L1i 32K 3M 8 Instruction 1 64 1 64
L2 1M 96M 8 Unified 2 2048 1 64
L3 32M 384M 16 Unified 3 32768 1 64

```

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 12 nodes (0-11)
node 0 cpus: 0-7,96-103
node 0 size: 32046 MB
node 0 free: 30846 MB
node 1 cpus: 8-15,104-111
node 1 size: 32246 MB
node 1 free: 31477 MB
node 2 cpus: 16-23,112-119
node 2 size: 32246 MB
node 2 free: 31490 MB
node 3 cpus: 24-31,120-127
node 3 size: 32246 MB
node 3 free: 31316 MB
node 4 cpus: 32-39,128-135
node 4 size: 32210 MB
node 4 free: 31380 MB
node 5 cpus: 40-47,136-143
node 5 size: 32246 MB
node 5 free: 31407 MB
node 6 cpus: 48-55,144-151

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 6 size: 32246 MB
node 6 free: 31482 MB
node 7 cpus: 56-63,152-159
node 7 size: 32246 MB
node 7 free: 31511 MB
node 8 cpus: 64-71,160-167
node 8 size: 32247 MB
node 8 free: 31526 MB
node 9 cpus: 72-79,168-175
node 9 size: 32247 MB
node 9 free: 31513 MB
node 10 cpus: 80-87,176-183
node 10 size: 32247 MB
node 10 free: 31527 MB
node 11 cpus: 88-95,184-191
node 11 size: 32178 MB
node 11 free: 31446 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11
0: 10 11 11 12 12 12 12 12 12 12 12 12
1: 11 10 11 12 12 12 12 12 12 12 12 12
2: 11 11 10 12 12 12 12 12 12 12 12 12
3: 12 12 12 10 11 11 12 12 12 12 12 12
4: 12 12 12 11 10 11 12 12 12 12 12 12
5: 12 12 12 12 11 11 10 12 12 12 12 12
6: 12 12 12 12 12 12 10 11 11 12 12 12
7: 12 12 12 12 12 12 11 10 11 12 12 12
8: 12 12 12 12 12 12 11 11 10 12 12 12
9: 12 12 12 12 12 12 12 12 12 10 11 11
10: 12 12 12 12 12 12 12 12 12 11 10 11
11: 12 12 12 12 12 12 12 12 12 11 11 10

```

```

9. /proc/meminfo
MemTotal:      395938348 kB

```

```

10. who -r
run-level 3 Apr 6 20:00

```

```

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user      running

```

```

12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                systemd-network-generator udisks2 upower
enabled-runtime systemd-remount-fs
disabled       blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat
                man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdm-rebuild serial-getty@
                sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708

SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2400MHz

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swapped 64
pages_to_scan 4096
scan_sleep_millisecs 10000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information
SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 13G 806G 2% /home

20. /sys/devices/virtual/dmi/id
Product: NS3260A7
Product Family: Not specified

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
12x Micron MTC20F2085S1RC48BA1 32 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 03.09.01
BIOS Date: 09/23/2023

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang`

Base Other Flags

C benchmarks:

`-Wno-unused-command-line-argument`

C++ benchmarks:

`-Wno-unused-command-line-argument`

Fortran benchmarks:

`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:

`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:

`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:

`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:

`clang`

C++ benchmarks:

`clang++`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using both C and C++:

`clang++ clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708

SPECrate®2017_fp_peak = 773

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708

SPECrate®2017_fp_peak = 773

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

-lamdalloc -lflang

549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708
SPECrate®2017_fp_peak = 773

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

511.povray_r (continued):

-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.1.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
i24A7 (AMD EPYC 9654)

SPECrate®2017_fp_base = 708

SPECrate®2017_fp_peak = 773

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-04-07 01:46:51-0400.

Report generated on 2023-11-21 20:34:52 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.