



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

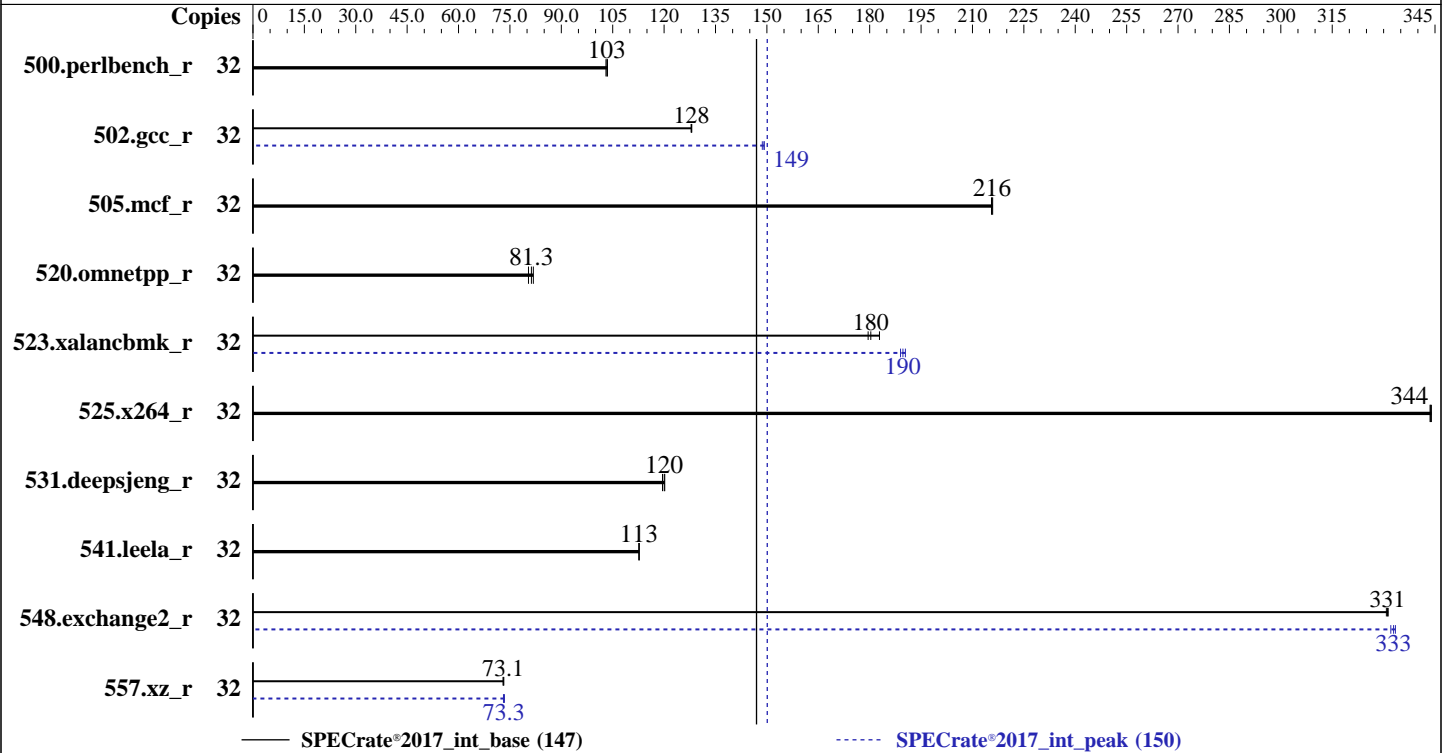

### Hardware

CPU Name: AMD EPYC 8124P  
 Max MHz: 3000  
 Nominal: 2450  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 64 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 192 GB (6 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB M.2 NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version MBE103I 1.10 released Sep-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	492	103	494	103	<u>493</u>	<u>103</u>	32	492	103	494	103	<u>493</u>	<u>103</u>
502.gcc_r	32	<u>354</u>	<u>128</u>	354	128	354	128	32	304	149	305	149	<u>304</u>	<u>149</u>
505.mcf_r	32	<u>240</u>	<u>216</u>	240	216	240	216	32	<u>240</u>	<u>216</u>	240	216	240	216
520.omnetpp_r	32	513	81.8	522	80.4	<u>517</u>	<u>81.3</u>	32	513	81.8	522	80.4	<u>517</u>	<u>81.3</u>
523.xalancbmk_r	32	<u>187</u>	<u>180</u>	185	183	188	180	32	177	190	<u>178</u>	<u>190</u>	179	189
525.x264_r	32	163	344	<u>163</u>	<u>344</u>	163	344	32	163	344	<u>163</u>	<u>344</u>	163	344
531.deepsjeng_r	32	<u>306</u>	<u>120</u>	307	120	305	120	32	<u>306</u>	<u>120</u>	307	120	305	120
541.leela_r	32	470	113	<u>470</u>	<u>113</u>	470	113	32	470	113	<u>470</u>	<u>113</u>	470	113
548.exchange2_r	32	<u>253</u>	<u>331</u>	253	331	253	331	32	252	332	251	333	<u>252</u>	<u>333</u>
557.xz_r	32	473	73.0	472	73.2	<u>473</u>	<u>73.1</u>	32	471	73.4	<u>472</u>	<u>73.3</u>	473	73.1

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017-1.1.9-amd
-aocc400-znver4-A1.2/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS2

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Nov 7 17:07:36 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

22. BIOS

1. `uname -a`  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. `w`  
17:07:36 up 9 min, 1 user, load average: 0.00, 0.00, 0.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 29Apr22 10.00s 1.29s 0.05s /bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh

3. Username  
From environment variable \$USER: root

4. `ulimit -a`  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 771850  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 771850  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./Run024-compliant-amd-rate.sh  
python3 ./run\_amd\_rate\_aocc400\_znver4\_A1.py  
/bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh  
runcpu --config amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.060/templogs/preenv.intrate.060.0.log --lognum 060.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2

6. `/proc/cpuinfo`  
model name : AMD EPYC 8124P 16-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25  
model : 160  
stepping : 2  
microcode : 0xaa00212

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size     : 3584 4K pages
cpu cores    : 16
siblings     : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 8124P 16-Core Processor
CPU family:            25
Model:                160
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             1
Stepping:              2
Frequency boost:      enabled
CPU max MHz:          3002.6851
CPU min MHz:          1500.0000
BogoMIPS:              4892.78
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             512 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              16 MiB (16 instances)
L3 cache:              64 MiB (4 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	16M	64M	16	Unified	3	16384	1	64

8. numactl --hardware  
NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0-31  
node 0 size: 192986 MB  
node 0 free: 192239 MB  
node distances:  
node 0  
0: 10

9. /proc/meminfo  
MemTotal: 197618296 kB

10. who -r  
run-level 3 Apr 29 20:00

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-fc-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=16cfcc2a-78c0-4035-9fc3-1137fe6f296c

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
```

-----  
14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.45 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1
```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

-----  
18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

-----  
(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Nov-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

#### 19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 xfs 447G 43G 405G 10% /

#### 20. /sys/devices/virtual/dmi/id

Vendor: Lenovo  
Product: ThinkEdge SE455 V3 Planar  
Product Family: ThinkSystem  
Serial: 1234567890

#### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
3x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800  
2x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800  
1x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: MBE103I-1.10  
BIOS Date: 09/07/2023  
BIOS Revision: 1.10  
Firmware Revision: 1.10

### Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

### Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 147

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: basepeak = yes
```

```
557.xz_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Nov-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamalloc-ext
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkEdge SE455 V3  
(2.45 GHz, AMD EPYC 8124P)

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 150

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Nov-2023

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-v1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-07 04:07:36-0500.

Report generated on 2023-12-06 19:43:29 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-06.