



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Jun-2023

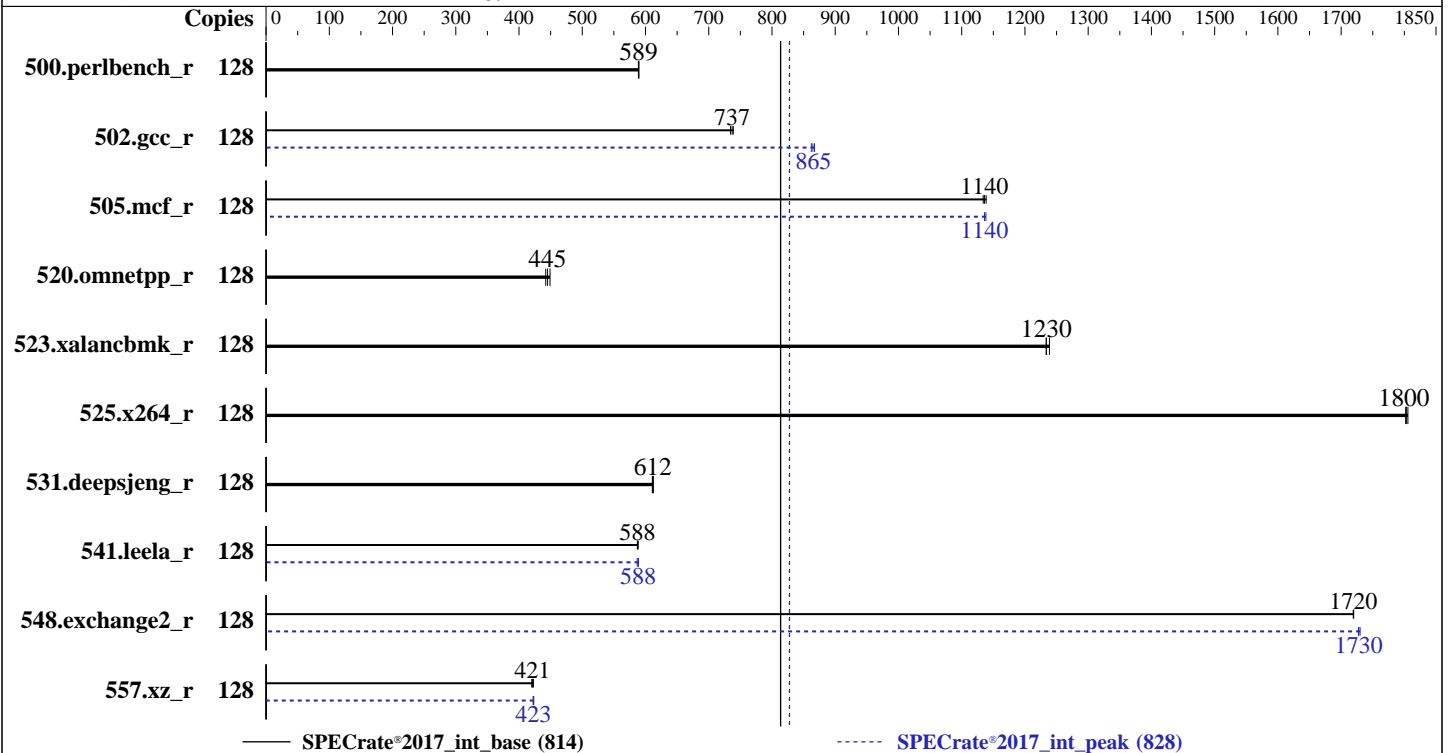

### Hardware

CPU Name: AMD EPYC 9384X  
 Max MHz: 3900  
 Nominal: 3100  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 768 MB I+D on chip per chip,  
 96 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version KAE115K 3.10 released Oct-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jun-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	346	589	<b>346</b>	<b>589</b>	346	589	128	346	589	<b>346</b>	<b>589</b>	346	589
502.gcc_r	128	<b>246</b>	<b>737</b>	247	735	245	739	128	209	867	<b>210</b>	<b>865</b>	210	862
505.mcf_r	128	<b>182</b>	<b>1140</b>	182	1140	182	1130	128	182	1140	182	1140	<b>182</b>	<b>1140</b>
520.omnetpp_r	128	380	442	374	449	<b>377</b>	<b>445</b>	128	380	442	374	449	<b>377</b>	<b>445</b>
523.xalancbmk_r	128	110	1230	109	1240	<b>110</b>	<b>1230</b>	128	110	1230	109	1240	<b>110</b>	<b>1230</b>
525.x264_r	128	<b>124</b>	<b>1800</b>	124	1800	124	1810	128	<b>124</b>	<b>1800</b>	124	1800	124	1810
531.deepsjeng_r	128	240	611	240	612	<b>240</b>	<b>612</b>	128	240	611	240	612	<b>240</b>	<b>612</b>
541.leela_r	128	361	587	360	588	<b>361</b>	<b>588</b>	128	<b>360</b>	<b>588</b>	361	587	360	589
548.exchange2_r	128	<b>195</b>	<b>1720</b>	195	1720	195	1720	128	194	1730	<b>194</b>	<b>1730</b>	194	1730
557.xz_r	128	327	423	<b>328</b>	<b>421</b>	329	420	128	<b>327</b>	<b>423</b>	327	422	327	423

SPECrate®2017\_int\_base = **814**

SPECrate®2017\_int\_peak = **828**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jun-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017-1.1.9-amd
-aocc400-znver4-A1.2/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Nov 22 16:24:35 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Jun-2023

## Platform Notes (Continued)

- 
- uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux
  - w  
16:24:35 up 4 min, 1 user, load average: 0.12, 0.36, 0.21  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 16:20 2:19 1.12s 0.10s /bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh
  - Username  
From environment variable \$USER: root
  - ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3094646  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3094646  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
  - sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./run\_SR665V3\_genoa-X\_1.02.sh  
/bin/bash ./Run025-compliant-amd-rateint.sh  
python3 ./run\_amd\_rate\_aocc400\_znver4\_A1.py  
/bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh  
runcpu --config amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.195/templogs/preenv.intrate.195.0.log --lognum 195.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
  - /proc/cpuinfo  
model name : AMD EPYC 9384X 32-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25  
model : 17  
stepping : 2  
microcode : 0xa10123e  
bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass  
TLB size : 3584 4K pages

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Jun-2023

## Platform Notes (Continued)

```

cpu cores      : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9384X 32-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               2
Frequency boost:        enabled
CPU max MHz:           3911.3279
CPU min MHz:           1500.0000
BogoMIPS:               6190.64
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                        aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
                        x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
                        extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt
                        tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                        cdp_l3 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                        vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                        wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                        vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                        v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                        overflow_recov succor smca fsrm flush_lld
Virtualization:         AMD-V
L1d cache:             2 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              64 MiB (64 instances)
L3 cache:              1.5 GiB (16 instances)
NUMA node(s):          8
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Jun-2023

### Platform Notes (Continued)

```

NUMA node4 CPU(s):          32-39,96-103
NUMA node5 CPU(s):          40-47,104-111
NUMA node6 CPU(s):          48-55,112-119
NUMA node7 CPU(s):          56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                             filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 96462 MB
node 0 free: 96056 MB
node 1 cpus: 8-15,72-79
node 1 size: 96763 MB
node 1 free: 96413 MB
node 2 cpus: 16-23,80-87
node 2 size: 96763 MB
node 2 free: 96432 MB
node 3 cpus: 24-31,88-95
node 3 size: 96729 MB
node 3 free: 96311 MB
node 4 cpus: 32-39,96-103
node 4 size: 96763 MB
node 4 free: 96412 MB
node 5 cpus: 40-47,104-111
node 5 size: 96763 MB
node 5 free: 96414 MB
node 6 cpus: 48-55,112-119
node 6 size: 96763 MB
node 6 free: 96432 MB
node 7 cpus: 56-63,120-127
node 7 size: 96681 MB
node 7 free: 96374 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

```
9. /proc/meminfo
MemTotal: 792260996 kB
```

```
10. who -r
run-level 3 Nov 22 16:20
```

```
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=5c910blf-682a-4d6d-8760-ecffd555ecb9
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 3.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

```
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Dec-2023

**Software Availability:** Jun-2023

### Platform Notes (Continued)

```

vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/md126p3    xfs   442G   25G  417G   6% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Lenovo
Product:        ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U
Product Family: ThinkSystem
Serial:         1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

```

1x SK Hynix HMC888AEBRA107N 32 GB 2 rank 4800
23x SK Hynix HMC888AEBRA168N 32 GB 2 rank 4800

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: KAE115K-3.10  
BIOS Date: 10/27/2023  
BIOS Revision: 3.10  
Firmware Revision: 2.30

### Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 814

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Compiler Version Notes (Continued)

-----  
Fortran | 548.exchange2\_r(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Dec-2023

**Software Availability:** Jun-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

-lamdalloc

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang  
-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 814

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Jun-2023

## Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665 V3  
(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 814

SPECrate®2017\_int\_peak = 828

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2023

**Hardware Availability:** Dec-2023

**Software Availability:** Jun-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-22 03:24:35-0500.

Report generated on 2023-12-20 13:12:50 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-20.