



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation


**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 6042  
Test Sponsor: Netweb Pte Ltd  
Tested by: Tyrone Systems

Test Date: Jan-2024  
Hardware Availability: Jun-2023  
Software Availability: Nov-2023

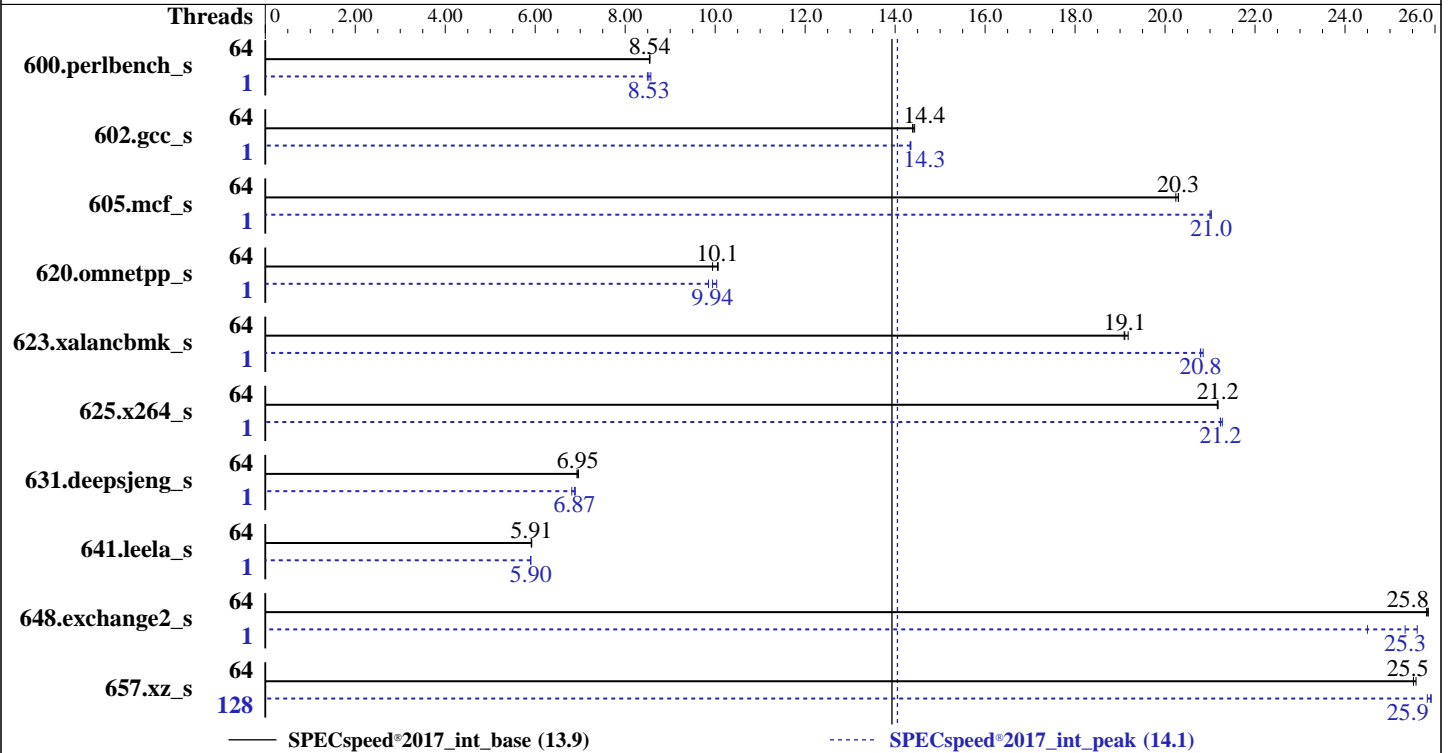

### Hardware

CPU Name: AMD EPYC 9554  
Max MHz: 3750  
Nominal: 3100  
Enabled: 64 cores, 1 chip, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
Other: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1 TB NVMe  
Other: None

### Software

OS: Ubuntu 20.04.4 LTS  
kernel version 5.15.0-91-generic  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 1.6 released Nov-2023  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	208	8.55	208	8.54	<b>208</b>	<b>8.54</b>	1	207	8.57	209	8.49	<b>208</b>	<b>8.53</b>
602.gcc_s	64	277	14.4	276	14.4	<b>277</b>	<b>14.4</b>	1	<b>278</b>	<b>14.3</b>	278	14.3	278	14.3
605.mcf_s	64	233	20.3	<b>233</b>	<b>20.3</b>	233	20.2	1	225	21.0	225	21.0	<b>225</b>	<b>21.0</b>
620.omnetpp_s	64	<b>162</b>	<b>10.1</b>	162	10.1	164	9.94	1	166	9.85	<b>164</b>	<b>9.94</b>	163	10.0
623.xalancbmk_s	64	<b>74.2</b>	<b>19.1</b>	74.2	19.1	73.9	19.2	1	<b>68.2</b>	<b>20.8</b>	68.2	20.8	68.0	20.8
625.x264_s	64	<b>83.3</b>	<b>21.2</b>	83.4	21.2	83.3	21.2	1	82.9	21.3	<b>83.1</b>	<b>21.2</b>	83.1	21.2
631.deepsjeng_s	64	207	6.93	<b>206</b>	<b>6.95</b>	206	6.96	1	<b>209</b>	<b>6.87</b>	210	6.81	208	6.89
641.leela_s	64	288	5.92	<b>288</b>	<b>5.91</b>	288	5.91	1	289	5.90	<b>289</b>	<b>5.90</b>	289	5.90
648.exchange2_s	64	114	25.8	<b>114</b>	<b>25.8</b>	114	25.9	1	115	25.6	120	24.5	<b>116</b>	<b>25.3</b>
657.xz_s	64	242	25.5	<b>242</b>	<b>25.5</b>	242	25.6	128	239	25.8	<b>239</b>	<b>25.9</b>	239	25.9

SPECspeed®2017\_int\_base = **13.9**

SPECspeed®2017\_int\_peak = **14.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-127"  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "128"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd2-Super-Server Wed Jan 24 13:08:43 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux amd2-Super-Server 5.15.0-91-generic #101~20.04.1-Ubuntu SMP Thu Nov 16 14:22:28 UTC 2023 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
13:08:43 up 20:39, 1 user, load average: 0.00, 0.00, 1.13  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
amd2 tty1 - Tue16 7.00s 1.57s 0.16s -bash  
-----

-----  
3. Username  
From environment variable \$USER: root  
From the command 'logname': amd2  
-----

-----  
4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 2061591  
nofiles 1024  
vmemory(kbytes) unlimited  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

locks unlimited  
rtprio 0

```
-----
5. sysinfo process ancestry
/sbin/init splash
/bin/login -p --
-bash
sudo su
su
bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9554 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores     : 64
siblings      : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

```
-----
7. lscpu

From lscpu from util-linux 2.34:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        52 bits physical, 57 bits virtual
CPU(s):               128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):            1
NUMA node(s):        1
Vendor ID:            AuthenticAMD
CPU family:           25
Model:                17
Model name:           AMD EPYC 9554 64-Core Processor
Stepping:             1
Frequency boost:      enabled
CPU MHz:              1500.000
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

```

CPU max MHz:          3762.9880
CPU min MHz:          1500.0000
BogoMIPS:              6199.81
Virtualization:       AMD-V
L1d cache:            2 MiB
L1i cache:            2 MiB
L2 cache:             64 MiB
L3 cache:            256 MiB
NUMA node0 CPU(s):   0-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:          Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:               Not affected
Vulnerability Tsx async abort:     Not affected
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL
L1d 32K 2M 8 Data 1
L1i 32K 2M 8 Instruction 1
L2 1M 64M 8 Unified 2
L3 32M 256M 16 Unified 3

```

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-127
node 0 size: 515473 MB
node 0 free: 512382 MB
node distances:
node 0
0: 10
-----

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 527844412 kB

10. who -r

run-level 3 Jan 23 16:29

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)

Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* fwupd-refresh.service	loaded	failed	failed	Refresh fwupd metadata and update motd

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw unattended-upgrades whoopsie wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievd openvpn-client@ openvpn-server@ openvpn@ rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport ipmidrv openipmi
indirect	display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-5.15.0-91-generic  
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57  
ro  
quiet  
splash  
vt.handoff=7

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

```

vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 20.04.4 LTS

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme1n1p2 ext4 938G 20G 871G 3% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Tyrone Systems
Product:     Tyrone Camarero SDA200A2W-212
Product Family: SMC H13
Serial:      A508280X3C11278

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 4x NO DIMM NO DIMM
 8x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     1.6

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

BIOS Date: 10/05/2023  
BIOS Revision: 5.27

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Base Portability Flags (Continued)

```
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Nov-2023

## Base Other Flags

C benchmarks:  
-Wno-return-type -Wno-unused-command-line-argument  
C++ benchmarks:  
-Wno-unused-command-line-argument  
Fortran benchmarks:  
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:  
clang  
C++ benchmarks:  
clang++  
Fortran benchmarks:  
flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
600.perlbench\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang  
602.gcc\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

( Tyrone Camarero SDA200A2W-212)

(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

620.omnetpp\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017\_int\_base = 13.9

SPECspeed®2017\_int\_peak = 14.1

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-24 02:38:43-0500.

Report generated on 2024-03-12 10:27:15 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-11.