



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416


Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

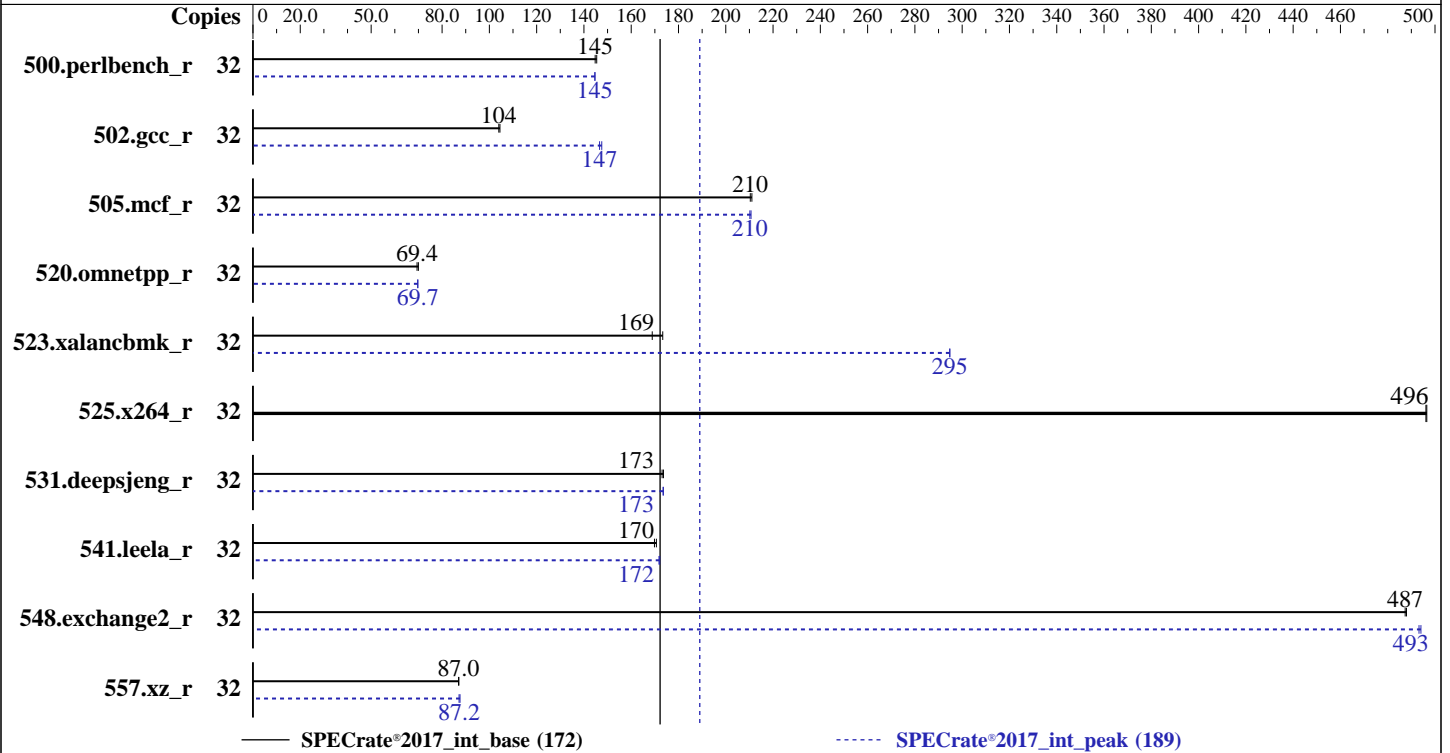

Hardware

CPU Name: AMD EPYC 4564P
 Max MHz: 5700
 Nominal: 4500
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5200B-R)

Storage: 1 x 960 GB NVMe M.2
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.4 LTS
 kernel version 5.15.0-105-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: BIOS version 10.14 released Feb-2024
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	350	145	<u>352</u>	<u>145</u>			32	352	145	<u>352</u>	<u>145</u>		
502.gcc_r	32	434	104	<u>436</u>	<u>104</u>			32	<u>309</u>	<u>147</u>	307	148		
505.mcf_r	32	<u>246</u>	<u>210</u>	245	211			32	245	211	<u>246</u>	<u>210</u>		
520.omnetpp_r	32	600	70.0	<u>605</u>	<u>69.4</u>			32	<u>603</u>	<u>69.7</u>	602	69.8		
523.xalancbmk_r	32	<u>200</u>	<u>169</u>	195	173			32	115	295	<u>115</u>	<u>295</u>		
525.x264_r	32	<u>113</u>	<u>496</u>	113	497			32	<u>113</u>	<u>496</u>	113	497		
531.deepsjeng_r	32	<u>212</u>	<u>173</u>	211	174			32	<u>211</u>	<u>173</u>	211	174		
541.leela_r	32	<u>312</u>	<u>170</u>	311	171			32	<u>309</u>	<u>172</u>	308	172		
548.exchange2_r	32	172	488	<u>172</u>	<u>487</u>			32	<u>170</u>	<u>493</u>	170	494		
557.xz_r	32	397	87.1	<u>397</u>	<u>87.0</u>			32	<u>396</u>	<u>87.2</u>	395	87.6		

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/asrr/A1/amd_rate_aocc400_znver4_A_lib/lib:/home/asrr/A1/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOCONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOCONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings :

Precision Boost Overdrive : Enabled

```
Sysinfo program /home/asrr/A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on asrr Mon Apr 22 02:50:49 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Platform Notes (Continued)

1. `uname -a`
Linux asrr 5.15.0-105-generic #115-Ubuntu SMP Mon Apr 15 09:52:04 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux

2. `w`
02:50:49 up 3 min, 3 users, load average: 0.02, 0.05, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
asrr tty1 - 02:47 9.00s 0.12s 0.03s -bash
asrr pts/0 192.168.30.247 02:48 1:45 0.00s 0.00s -bash
asrr pts/1 - 02:50 6.00s 0.63s 0.05s sudo ./asrr_run.sh

3. Username
From environment variable \$USER: root
From the command 'logname': asrr

4. `ulimit -a`
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 253567
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. `sysinfo process ancestry`
/sbin/init
/bin/login -p --
-bash
sudo ./asrr_run.sh
sudo ./asrr_run.sh
sh ./asrr_run.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 1 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 1 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/asrr/A1

6. `/proc/cpuinfo`
model name : AMD EPYC 4564P 16-Core Processor
vendor_id : AuthenticAMD
cpu family : 25
model : 97
stepping : 2
microcode : 0xa601206
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size : 3584 4K pages

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Platform Notes (Continued)

```
cpu cores      : 16
siblings      : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 4564P 16-Core Processor
CPU family:            25
Model:                 97
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             1
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           5879.8818
CPU min MHz:           3000.0000
BogoMIPS:              9000.28
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                        rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt
                        aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
                        sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl
                        avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                        avx512_bitalg avx512_vpopcntdq rdpid overflow_recov succor smca fsrm
                        flush_l1d
Virtualization:        AMD-V
L1d cache:             512 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              16 MiB (16 instances)
L3 cache:              64 MiB (2 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416
Test Sponsor: ASRock Rack Inc.
Tested by: ASRock Rack Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2023
Software Availability: Apr-2024

Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec rstack overflow: Mitigation; safe RET
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 63505 MB
node 0 free: 62715 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 65029364 kB

10. who -r

run-level 5 Apr 22 02:47

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```
Default Target Status
graphical running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport openipmi
indirect uuid
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Platform Notes (Continued)

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-105-generic
root=UUID=d47cad3b-93a2-4ee6-9b75-5cb5f72fe94c
ro
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 3.00 GHz and 4.50 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 2
    Pstate-P0: 4500MHz
```

```
-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

```
-----
18. OS release
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416
Test Sponsor: ASRock Rack Inc.
Tested by: ASRock Rack Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2023
Software Availability: Apr-2024

Platform Notes (Continued)

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.4 LTS

19. Disk information

SPEC is set to: /home/asrr/Al
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p4 ext4 874G 12G 818G 2% /

20. /sys/devices/virtual/dmi/id

Vendor: AsrockRack
Product: 1U4LW-B650/2L2T RPSU

21. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
2x Unknown CT32G52C42U5.M16G1 32 GB 2 rank 5200
2x Unknown Unknown

22. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 10.14
BIOS Date: 02/05/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-faggressive-loop-transform -fvector-transform
-fscalar-transform -lamdlibm -lflang -lamdalloc
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD EPYC 4564P

SPECrate®2017_int_base = 172

SPECrate®2017_int_peak = 189

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -lamdalloc

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_rate_aocc400_znver4_A.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_rate_aocc400_znver4_A.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-21 22:50:49-0400.

Report generated on 2024-06-14 19:18:44 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-14.